

IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 12/02/2016, and contains the following Products:

25-3518/01

Digital Tritest 50

27-1551

S-Type Load Cell 5 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

27-1617

Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

27-1633

Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin Din Plug.

26-1880

Universal Pump and Pressure Indicating Panel 1700Kpa.

26-1760

Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 Kpa Max.

26-1746

Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

83-1730/01

Air Compressor

26-1926

Nylon Tubing 6mm Od 3500Kpa.

26-1769

Nylon Tubing 30 Metre Length.

27-1293

Distance Piece Stainless Steel for Use with Submerisable Load Cells and Axial Strain Transducers.

25-4047

50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

25-4168

50mm Base Adapter for 50mm Cells.

25-5470

Membrane Placing Tool 50mm Diameter.

25-5480

Suction Membrane Device 50mm Diameter.

25-5500

Two-Way Split Former 50mm Diameter.

25-5430

Pressure Pad 50mm Diameter.

25-5441

Rubber Membrane 50mm Diameter Pack of 10.

25-5461

Membrane Sealing Ring 50mm Diameter Pack of 10.

25-4157

100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

25-4186

100 mm Base Adaptor for 100 mm Triaxial Cell.

25-7610

Membrane Placing Tool 100mm/4 Inch Diameter.

25-7640

Suction Membrane Device 100mm/4 Inch Diameter.

25-7650

Two-Way Split Former 100mm Diameter.

25-7590

Pressure Pad 100mm Diameter.

25-7621

Rubber Membrane 100mm/4 Inch Diameter. Pack of 10

25-7631

Membrane Sealing Ring 100mm Diameter. Pack of 10.

24-9150/01

Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

27-1559

50kN S-type Load Cell

27-1705

CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

24-9182

Penetration Piston

24-9188

Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

24-9214

2Kg Annular Surcharge Weight

24-9216

2Kg Split Surcharge Weight.

25-0402

Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

25-0408

Set of Weights 100Kg Total Weight.

25-0503

Consolidation Cell Complete 75mm Diameter Sample

25-0509

Calibration Disc 75mm Cell

27-1649

Consolidation Transducer Assembly 15mm Travel Fitted with 5 Pin Din Plug.

26-2114/01

Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

27-1561

S-Type Load Cell 5 kN.for Use with Direct/ Residual Shear Machine. Fitted with 5 Pin Din Plug.

26-2132

Set of Weights 50 kg Slotted.

26-2201

Specimen Cutter 100mmsq.

26-2205

Specimen Extrusion Tool 100 mm sq

27-1697

Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

27-1689

Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

25-0580

Constant Head Permeability Cell 75mm Diameter Specimen.

25-0591

Manometer Tubes & Stand.

25-0593

Constant Level Tank.

42-4580

Tamping Rod 8mm Dia X 300mm.

82-0380

Measuring Cylinder - Glass 100 ml

82-0460

Measuring Cylinder - Glass 500 ml

27-1500/01

GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

27-1505

8-Channel Expansion Analog Input Module



S1160

**DS7.2 Software-UU/CU/CD Triaxial, Permeability, Consolidation,
Direct/Residual Shear, CBR**



Digital Tritest 50

Code: 25-3518/01

Product Group: Digital Tritest 50 Load Frame, Load Frames

- Microprocessor control
- Large on-board LED screen display
- Direct entry via a touch sensitive keyboard
- Rapid approach and return to datum of platen
- Fully variable speed, 0.00001 to 9.99999 mm/min
- Samples up to 100 mm diameter

This 50 kN capacity machine, designed primarily for triaxial testing of soil specimens up to 100 mm diameter x 200 mm long, comprises a rigid twin column construction with an integral fully variable microprocessor controlled drive unit and LCD display with a touch sensitive keyboard. The machine is normally bench mounted for ease of installation and operation.

The use of a microprocessor controlled drive system and keyboard entry provides the Digital Tritest 50 with a wide variety of features which include pause and speed reset during test, RS 232C, operator programming of speed and control functions, self test diagnostics and many other features.

A robustly constructed steel case houses the motor drive system with careful attention being given to the prevention of ingress of water or grit. All operating controls are mounted on the front panel of the machine, which is angled and recessed to prevent physical and environmental damage.

Standards

BS 1377-7, BS 1377-8, BS 1924-2, ASTM D1883, ASTM D2166, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180, AASHTO T193, AASHTO T208, AASHTO T296, AASHTO T297

Further Information

Complete with RS 232C interface.

Specification

Dimensions (l x w x h)	500 x 500 x 1470 mm
Max vertical clearance	910 mm
Horizontal clearance	364 mm
Platen diameter	133 mm
Platen travel	100 mm
Platen speed range	0.00001 to 9.99999 mm/min

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Rapid approach speed	25 mm/minute
Weight kg	140
Capacity	12 ,200 lbf. (50 kN).
Speed Range	English mode: 0.000001 to 0.399999 in/min. Metric mode: 0.00001 to 9.99999 mm/min.
Rapid Approach Speed	2.0 in/min. (50 mm/min.).
Platen Travel	3.9" (100 mm); limit switch protection.
Vertical Clearance	36 .8" (910 mm) maximum; 12 " (305 mm) minimum.
Horizontal Clearance	15 .3" (364 mm).
Serial Interface	RS232 C; programmable baud rate and protocol.
Overall Dimensions	19.7" w. x 19.7" d. x 57.8" h. (500 x 500 x 1,470 mm).
Weight	Net 220 lbs. (100 kg); Shpg. 300 lbs. (136 kg).



S-Type Load Cell 5 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

Code: [27-1551](#)

Product Group: [Load Measurement, Load Measurement](#)

- Repeatability better than $\pm 0.02\%$ of rated output
- Non-Linearity better than $\pm 0.03\%$ of rated output
- Supplied complete with 5-pin DIN type connector for connection to GDU

Ideally suited for a wide range of applications, ELE S-type load cells provide high accuracy and minimum deformation. Various models are available, with the necessary adaptors, for use with ELE Triaxial Load Frames, Multiplex 50/Marshall Test 50/CBR Test 50 and Direct Shear machine.



Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1617](#)

Product Group: [Axial Displacement](#), [Axial Displacement](#), [Displacement Transducers](#)

0 to 50 mm range. For use with Triaxial Cells.

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	10 V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45
Construction	Fully encapsulated electronics, sealed in a stainless steel case.
Excitation	10vDC.
Connector	5-Pin DIN type.
Mounting Bracket	Included as standard.
Weight	Net 1 lb. (0.45 kg).



Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin Din Plug.

Code: 27-1633

Product Group: [Pressure Transducer](#), [Pressure Measurement](#), [Tri-Flex 2 One-Cell Permeability Test System](#)

Pressure Transducers are used to measure the cell, pore and back pressures during triaxial testing. Assemblies are supplied complete with a de-airing block, valve, 5-pin DIN plug connector and calibration certificate

Specification

Construction	Stainless steel
Excitation	10 V DC
Output	143 mV full range
Thread	1/4" BSP
Construction	Stainless Steel.
Excitation	10vDC.
Thread	1/4 BSP.
Construction	Stainless Steel.
Excitation	10vDC.
Thread	1/4 BSP.



Universal Pump and Pressure Indicating Panel 1700Kpa.

Code: [26-1880](#)

Product Group: [Modular Pressure Panel System](#)

This is the main pressure display in the system for monitoring various pressures and also provides fine control of the pressure within the system using the rotary hand pump. The unit is fitted with a dual calibrated 250 mm diameter pressure gauge, four inlet/outlet no-volume change valves, screw controlled rotary hand pump, water reservoir and isolating valves. The unit is housed in a hinged case for wall or bench mounting. By using an isolating valve the panel may be used to monitor cell or back pressure. 1700 kPa and 250 lbf/in².

Spares/Consumables



Pressure Gauge 1700Kpa (250Psi) 250mm Diameter.

Code: [26-1865/10](#)



Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 Kpa Max.

Code: 26-1760

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

Comprising two constant pressure reducing valves with inlet water trap and pressure indicator. The unit allows a maximum output pressure of 1000 kPa. Maximum input pressure should not exceed 1400 kPa. The panel has an inlet connector to accept Nylon tubing from the air compressor and two 6 mm outlets for connecting Bladdertype Air/Water Pressure Assemblies. An outlet connector is fitted for the connection of an additional panel using Nylon tubing to increase the total capacity of the system. This outlet is blanked off when not required.



Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

Code: 26-1746

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

With transparent plastic chamber for operating continuously at pressures up to 1000 kPa. A length of tubing is provided for connecting the air/water cylinder outlet to a pressure measuring system.

- Used to supply hydraulic pressure from a pneumatic pressure source.
- Prevents air entering the hydraulic pressure system.
- Maximum working pressure 1000kpa.
- Supplied with connectors and tubing for fitting to pressure measuring systems.

Spares/Consumables



Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 Kpa Max.

Code: 26-1760



Replacement Bladder Wide Neck (38mm Id)

Code: 26-1746/10



Air Compressor

Code: 83-1730/01

Product Group: Air Compressors, Air/Water Pressure Systems - up to 1000 kPa

Further Information

NOT AVAILABLE FOR SALE IN THE USA

Specification

Dimensions (l x w x h)	483 x 457 x 864 mm
Free air delivery	2.0 cfm
Receiver capacity	50 litres
Maximum pressure	1000 kPa
Continuous working pressure	700 kPa
Electrical supply	220 – 240 V AC 1 ph 50 Hz
Water Trap	No
Weight	57 kg



Nylon Tubing 6mm Od 3500Kpa.

Code: 26-1926

Product Group: [Volume Change Measurement](#),
[Permeability of Rock](#)

6 mm outside diameter x 4 mm inside diameter. For use up to a pressure of 3500 kPa. Priced per metre.



Nylon Tubing 30 Metre Length.


Code: [26-1769](#)

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

30 metre length. For pressures up to 1700 kPa. Used for connecting Air Compressors to Pneumatic Pressure Reducing Panels, or for connecting two Pressure Reducing Panels together.

Further Information

Nylon tubing 30 metres with pressure fittings.

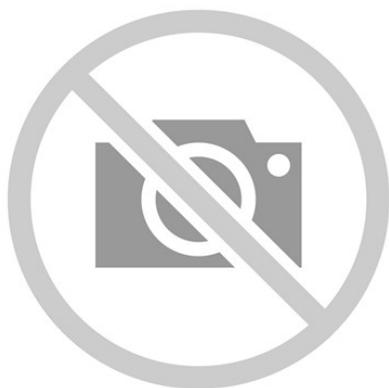

Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)

Product Group: [Submersible Load Transducers](#), [Load Measurement](#), [Load Measurement](#)

Required when using submersible load cells.



50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4047](#)

Product Group: [Triaxial Cell, Triaxial Cells](#)

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

Specification

Cell size	50 mm
Max specimen size	50 x 100 mm
Working pressure	1700 kPa
Max piston load	45 kN
Vertical clearance required	380 mm
Horizontal clearance required	155 mm
Weight kg	4



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)

Product Group: [Base Pedestals, Specimen Base Adaptors](#)

50mm Base Adapter with Twin Pore Pressure Ports for 50mm Cells.

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297



Membrane Placing Tool 50mm Diameter.

Code: [25-5470](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

50 mm Diameter Membrane Placing Tool.



Suction Membrane Device 50mm Diameter.

Code: [25-5480](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

50 mm Diameter Suction Membrane Device.



Two-Way Split Former 50mm Diameter.

Code: [25-5500](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

50 mm Diameter Two-Way Split Former.



Pressure Pad 50mm Diameter.

Code: [25-5430](#)

Product Group: [Specimen Caps, Pressure Pads](#)

50 mm diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



Rubber Membrane 50mm Diameter Pack of 10.

Code: [25-5441](#)

Product Group: [Rubber Membranes](#)

50 mm diameter rubber membrane (Pack Of 10).



Membrane Sealing Ring 50mm Diameter Pack of 10.

Code: [25-5461](#)

Product Group: [Membrane Sealing Rings, Sealing Rings](#)

50 mm diameter membrane sealing ring (Pack Of 10).



100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4157](#)

Product Group: [Triaxial Cell, Triaxial Cells](#)

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)

Product Group: [Base Pedestals](#), [Specimen Base Adaptors](#)

100 mm Base Adaptor with Twin Pore Pressure Ports for 100 mm Triaxial Cell.

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297



Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

100Mm/4 Inch Diameter Membrane Placing Tool.

Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297



Suction Membrane Device 100mm/4 Inch Diameter.

Code: [25-7640](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

100Mm/4 Inch Diameter Suction Membrane Device.



Two-Way Split Former 100mm Diameter.

Code: [25-7650](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)



Pressure Pad 100mm Diameter.

Code: [25-7590](#)

Product Group: [Specimen Caps, Pressure Pads](#)

100 mm diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.

Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297



Rubber Membrane 100mm/4 Inch Diameter. Pack of 10

Code: [25-7621](#)

Product Group: [Rubber Membranes](#), [Rubber Membranes](#), [Tri-Flex 2 Permeability Test Cell](#)

100 mm/4 Inch diameter rubber membrane (pack of 10).

Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181



Membrane Sealing Ring 100mm Diameter. Pack of 10.

Code: [25-7631](#)

Product Group: [Membrane Sealing Rings, Sealing Rings, Tri-Flex 2 Permeability Test Cell](#)

100 mm diameter membrane sealing ring (Pack Of 10).

Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/01](#)

Product Group: [Load frames](#)

- Single speed machine (BS/EN and ASTM)
- Rapid platen adjustment
- Complete with stabilising bar
- Compact, bench-mounting design
- Options for mechanical or electronic measurement

Designed for performing laboratory CBR tests to BS 1377, EN13286-47 and ASTM D1883, this bench mounting machine comprises a twin column frame incorporating a motorised drive system. Rapid adjustment of the platen is provided, which enables daylight to be taken up quickly and also close control of application of a seating load.

Standards

BS 1377, BS 1924, EN 13286-47, ASTM D1883, AASHTO T193

Specification

Dimensions (l x w x h)	550 x 400 x 1220 mm
Max vertical clearance	800 mm
Horizontal clearance	255 mm
Platen diameter	133 mm
Platen travel	105 mm
Weight kg	80



50kN S-type Load Cell

Code: [27-1559](#)

Product Group: [Force measurement, Load Measurement, Electronic Instrumentation](#)

Maximum working capacity of 50 kN and excitation 10 V ac/dc with an output of 2.7 mV/V nominal. Aluminium alloy and stainless steel construction with IP65 environmental protection.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1705](#)

Product Group: [Penetration Measurement, Penetration and measurement](#)

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	14 V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45



Penetration Piston

Code: [24-9182](#)

Product Group: [Penetration and measurement](#)

1.935 mm² (3 in²) area foot of case hardened steel.
Designed to fit all ELE load rings.



Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

Code: 24-9188

Product Group: [In-situ CBR](#), [Conversion of In-situ to Laboratory CBR](#), [Penetration and measurement](#)

Dual purpose mounting bracket for CBR penetration dial gauges. Allows gauge to be fixed to penetration piston or load ring.




2Kg Annular Surcharge Weight

Code: [24-9214](#)

Product Group: [BS EN CBR mould and accessories](#)

Standards

BS 1377, BS 1924, EN 13286-4, EN 1997-2

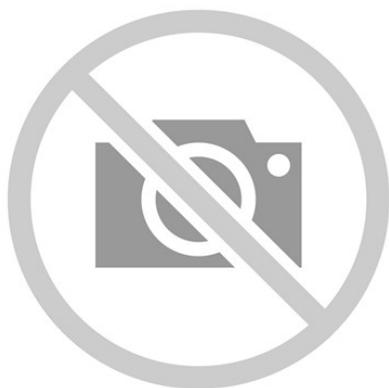

2Kg Split Surcharge Weight.

Code: [24-9216](#)

Product Group: [BS EN CBR mould and accessories](#)

Standards

BS 1377, BS 1924, EN 13286-4, EN 1997-2



Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

Code: 25-0402

Product Group: Consolidation Apparatus, Table Top Consolidation Apparatus

- High capacity - 8800 kPa on 50 mm diameter specimens using 11:1 beam ratio
- Triple beam ratio, 9:1, 10:1, 11:1
- Compact unit ensures maximum space saving

The ELE Oedometer is rigidly constructed to ensure minimum frame distortion. The frame is designed to load the specimen through a yoke assembly and one of three alternative beam ratios. The beam is fitted with a counterbalance weight and beam support jack. The cell platform will accept the complete range of ELE consolidation cells and is fitted with a central spigot to ensure accurate centring of the cell under the loading yoke. Dimensions without hanger 711 x 203 x 508 mm (l x w x h). Weight 22 kg.

Standards

BS 1377, EN 1997-2, ASTM D2435, ASTM D4546, AASHTO T216

Further Information

Supplied without dial gauge and weights.

Specification

Load Capacity	48 tons/sq. ft. (5,14 8 kPa) on 2.5" (63 mm) diam. samples.
Loading Beam	Cast aluminum; counterbalanced; 9:1,10:1 and 11 :1 ratios.
Frame	Cast aluminum; integral beam support jack; plated steel and platform.
Dimensions	8" w. x 28" d. x 20" h. (203 x 711 x 508 mm), excluding weight hanger.
Weight	Net 30 lbs. (13 .6 kg); Shpg. 40 lbs. (18.1 kg).



Set of Weights 100Kg Total Weight.

Code: [25-0408](#)

Product Group: [Consolidation Apparatus](#)

9 x 10 kg, 1 x 5 kg, 2 x 2 kg, 1 x 1 kg.

Standards

ASTM D2435, ASTM D4546, AASHTO T216



Consolidation Cell Complete 75mm Diameter Sample

Code: [25-0503](#)

Product Group: [BS EN consolidation cells and accessories](#), [Pneumatic Consolidation Apparatus](#), [Fixed Ring Consolidation](#), [Table Top Consolidation Apparatus](#)

Standards

BS 1377, EN 1997-2

Specification

Application	BS/EN 10:1
Specimen Dia	75 mm
Specimen area	4418 mm ²
Beam ratio	9:1
Load kg	1
Stress	20 kPa
Typical max stress	3.2 MPa
Stress for 1 kg m ²	20 kPa
Application	BS
Specimen Diameter	75 mm
Specimen Area	4418 mm ²
Beam Ratio	10:01
Load	1 kg
Stress	20 kPa
Typical Maximum Stress	3.2 MPa
Stress for 1 kg	20 kPa

Spares/Consumables



75mm Dia Upper and Lower Porous Stones for Use on EL25-0503 Series Cell.

Code: [25-0503/13](#)



Cutting Ring 75mm Cell.

Code: [25-0506](#)





Calibration Disc 75mm Cell

Code: [25-0509](#)

Product Group: [BS EN consolidation cells and accessories](#), [Fixed Ring Consolidation](#)

Standards

BS 1377, EN 1997-2



Consolidation Transducer Assembly 15mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1649](#)

Product Group: [Displacement Transducers](#), [Vertical settlement measurement](#), [Displacement Measurement](#)

Fitted with 5 pin DIN plug.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	11 V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45
Construction	Fully encapsulated electronics, sealed in a stainless steel case.
Excitation	10vDC.
Connector	5-Pin DIN type.
Mounting Bracket	Included as standard.
Weight	Net 1 lb. (0.45 kg).



Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

Code: 26-2114/01

Product Group: [Direct/Residual Shear Apparatus](#),
[Direct/Residual Shear Apparatus](#)

- Microprocessor control
- Large on-board LCD screen display
- Direct entry via touch sensitive keyboard
- Rapid approach and return to start datum
- Fully variable speed, 0.00001 to 9.99999 mm/minute
- Accepts specimens up to 100 mm square

The ELE Direct Shear Apparatus accepts specimens 60 mm, 100 mm square or 2.5 inches in diameter. The use of a microprocessor controlled drive system and keyboard entry gives the apparatus a wide range of features that include pause and speed reset during test, RS 232C interface, operator programming of speed and control functions, self test diagnostics and many other features. A return to start datum provides a positive means of reversing the shearbox when either preparing for a new test or continuing with residual testing procedures.

Safety forward/reverse travel limit switches are fitted as standard and monitored through the electronics system control.

The electronics are housed in a modern moulded shroud, which includes a large LCD display and keyboard entry. The apparatus is enclosed in a robustly constructed case, has been designed for floor mounting and is supplied complete with carriage, loading hanger and 10:1 lever loading device.

Standards

ASTM D3080, AASHTO T236, BS 1377, EN 1997-2

Further Information

for 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Sample Size

Accepts either 2.42", 2.5" diam.; 60 mm square samples using accessory shear box assemblies, not included.

Speed Range

Variable in either English or Metric units

	between 0.000001" (0.00001 mm) to 0.399999" (9.99999 mm) per minute.
Shear Force	1,000 lbf. (4.5 kN) maximum.
Vertical Load	2,200 lbf. (1,000 kN) using 10:1 lever ratio.
Dimensions	44.7" l. x 12 .6" w. x 49.6" h. (1,135 x 320 x 1,260 mm).
Weight	Net 181 lbs. (82 kg).

Spares/Consumables



Dial Indicator - 1.0" Range

Code: [88-4100](#)



S-Type Load Cell 5 kN.for Use with Direct/Residual Shear Machine. Fitted with 5 Pin Din Plug.

Code: [27-1561](#)

Product Group: [Measurement of Load \(Shear Stress\), Load Measurement](#)

- Repeatability better than $\pm 0.02\%$ of rated output
- Non-Linearity better than $\pm 0.03\%$ of rated output
- Supplied complete with 5-pin DIN type connector for connection to GDU

Ideally suited for a wide range of applications, ELE S-type load cells provide high accuracy and minimum deformation. Various models are available, with the necessary adaptors, for use with ELE Triaxial Load Frames, Multiplex 50/Marshall Test 50/CBR Test 50 and Direct Shear machine.

Standards

BS 1377, ASTM D3080



Set of Weights 50 kg Slotted.

Code: [26-2132](#)

Product Group: [Application of Normal Stress](#)

Normal stress is applied to the specimen through the lever loading device and the appropriate slotted weights



Specimen Cutter 100mmsq.

Code: [26-2201](#)

Product Group: [Shear Box Assemblies](#), [Shear Box Assemblies](#)

Standards

ASTM D3080, AASHTO T236

Spares/Consumables



Specimen Cutter 2.5 Inch Diameter.

Code: [26-2217](#)



Specimen Cutter 60mm Sq.

Code: [26-2185](#)



Specimen Extrusion Tool 100 mm sq

Code: [26-2205](#)

Product Group: [Shear Box Assemblies](#)

Standards

ASTM D3080, AASHTO T236



Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)

Product Group: [Displacement Transducers, Measurement of Horizontal and Vertical Movement, Displacement Measurement](#)

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	13 V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45
Construction	Fully encapsulated electronics, sealed in a stainless steel case.
Excitation	10vDC.
Connector	5-Pin DIN type.
Mounting Bracket	Included as standard.
Weight	Net 1 lb. (0.45 kg).



Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: 27-1689

Product Group: [Displacement Transducers, Measurement of Horizontal and Vertical Movement, Displacement Measurement](#)

0 to 10 mm range. For use with Direct/Residual Shear Machines. •Ideally suited for use with GDU for accurate displacement measurements

- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	12 V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45
Construction	Fully encapsulated electronics, sealed in a stainless steel case.
Excitation	10vDC.
Connector	5-Pin DIN type.
Mounting Bracket	Included as standard.
Weight	Net 1 lb. (0.45 kg).



Constant Head Permeability Cell 75mm Diameter Specimen.

Code: [25-0580](#)

Product Group: [Constant Head Apparatus](#)

75 mm Diameter

Standards

BS 1377, EN 1997-2, ASTM D2434, AASHTO T215

Specification

Nominal Cell inside diameter	75 mm
Cell wall	Transparent plastic
Take-off points	3
End plates	Anodised aluminium
Weight kg	2.6



Manometer Tubes & Stand.

Code: [25-0591](#)

Product Group: [Constant Head Apparatus](#)

Comprising three glass tubes of constant bore, metre scale and connecting tubing for cell pressure take-off points, all mounted on a free-standing panel. Comprising three glass tubes of constant bore, metre scale and connecting tubing for cell pressure take-off points, all mounted on a free-standing panel.

Standards

BS 1377, EN 1997-2, ASTM D2434, AASHTO T215



Constant Level Tank.


Code: [25-0593](#)

Product Group: [Constant Head Apparatus](#)

Manufactured from transparent plastic with attachment for wall mounting. The inlet, outlet and overflow pipes are fitted to the base of the tank and can be adjusted for height within the tank. Supplied complete with connecting tubing.

Standards

BS 1377, EN 1997-2, ASTM D2434, AASHTO T215

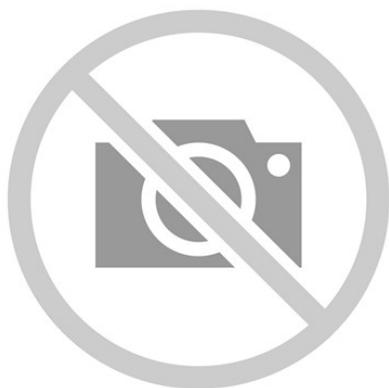

Tamping Rod 8mm Dia X 300mm.

Code: 42-4580

Product Group: [Aggregate Crushing Value \(ACV\)](#) and [Ten Percent Fines Value \(TFV\)](#)

Spare: 8mm diameter x 300mm long with rounded end.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Measuring Cylinder - Glass 100 ml

Code: 82-0380

Product Group: [Measuring Cylinders, BS, Volumetric Shrinkage](#)

Soda glass, spouted, BS EN 4788.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Measuring Cylinder - Glass 500 ml

Code: [82-0460](#)

Product Group: [Measuring Cylinders, BS](#)

Soda glass, spouted, BS EN 4788.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

Code: 27-1500/01

Product Group: [Automatic data acquisition](#), [Automatic Data Acquisition](#), [Automatic data acquisition](#), [Automatic Data Acquisition](#), [Data Logging with the GDU](#), [Geotechnical Data Acquisition Unit \(GDU\)](#)

The GDU is a stand-alone, multi-tasking, multi-channel data logger, that is reliable and powerful, enabling it to co-ordinate test data from the range of ELE transducers required for various test methods.

The ELE Geotechnical Software package (DS7.1), in conjunction with the GDU and a range of transducers, are the two central components required to create a modern turnkey soil testing system. Being fully modular it can be adapted to a wide range of soil testing laboratory configurations.

- For performing CBR, Consolidation, Direct/Residual Shear and Total & Effective Stress Triaxial tests
- 8 Channels expandable to 32 for performing multiple, concurrent tests for cost savings
- Independent signal conditioning on each channel to maintain data accuracy
- Field-upgradeable software, meaning no downtime for future software and functionality upgrades
- Extended warranty.

Specification

Case	Aluminum, free standing; houses power supply, analog to digital conversion module and an 8-channel analog input module with transducer energization.
Sockets	Standard 5-pin DIN type.
Input Range	± 5 volts to ± 10 mV full scale.
Transducer Supply	10vDC.
Dimensions	12.8" w. x 14.3" d. x 6.1" h. (325 x 363 x 155 mm).
Weight	Net 14.08 lbs. (6.4 kg).



8-Channel Expansion Analog Input Module

Code: [27-1505](#)

Product Group: [Geotechnical Data Acquisition Unit \(GDU\)](#)



DS7.2 Software-UU/CU/CD Triaxial, Permeability, Consolidation, Direct/Residual Shear, CBR

Code: **S1160**

Product Group: **DS7, DS7.2 Geotechnical Software General Module**

- Programs available for Triaxial, Permeability Consolidation, Direct/Residual Shear and CBR tests
- Full support for Windows 7 and MS Word 2007/2010
- Accurate and repeatable test procedures
- 24 hour unsupervised logging
- Eliminate the possibility of errors while taking manual readings
- Tests are run with step-by-step instructions selectable between BS and ASTM/AASHTO standards
- Automatic report generation in accordance with the above standards
- Real-time graphical outputs to both screen and printer as required