



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 22/02/2016, and contains the following Products:

45-3803

Filter Discs Pack of 100

81-4020

Sample Tray - 306 x 306 x 38 mm

79-7200

Sieve Brush Brass and Nylon

47-0202

Digital Asphalt Thermometer

47-0202/10

250 Asphalt Probe

82-5247

Portable Thermometer 100 ml

45-6600/01

AutoComp 100-A

45-6310

Compaction Mould

45-6462

Paper Discs

23-6191/01

Bench-Mounting Mixer 4.7Litre Capacity Complete with Bowl Beater and Whisk. 220-240V 50Hz 1Ph.

45-5580/01

Isomantle Electric Heater

81-0140

Spatula 200 mm

81-0220

Aluminium Scoop Large

81-0508

Heat-Resistent Gloves, With Gauntlet

23-4200

Proctor/Core Cutter Extruder Frame and Hydraulic Jack. Extrudes 100mm/4 Inch Diameter Specimens

45-6550/01

30 L Heating Bath with Led Display Cover

45-6810/01

Marshall Test 50

78-0860

50kN Load Measuring Ring

45-6850

Breaking Head (Marshall)

45-6880

Flow Meter BS/EN

46-3310/01

Cleveland Flash Cup Apparatus

46-5295/01

Semi-Automatic Penetrometer

46-5360/10

Penetration Needle

46-5800

Transfer Dish

46-5860

Penetration Tin

46-5861

Penetration Tin

46-5500/01

Constant Temperature Bath 21 - 56°C

78-2950/01

Hotplate

Contents

www.ele.com
+44 (0) 01525 249 200



82-7861

Filter Paper - Fast

46-4605

BS/EN Ring and Ball Apparatus

46-4825/01

Magnetic Stirrer

81-0094

Support Assembly

81-4030

Sample Tray - 406 x 406 x 50 mm



Filter Discs Pack of 100

Code: [45-3803](#)

Product Group: [Asphalt Centrifuge Extractors](#)


248mm outer diameter with 44mm diameter hole.

Standards

EN 12697-1, ASTM D2172, AASHTO T164

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

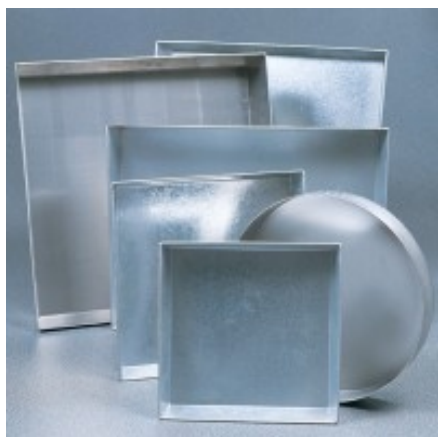

Sample Tray - 306 x 306 x 38 mm

Code: [81-4020](#)

Product Group: [Sample Trays](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Sieve Brush Brass and Nylon

Code: [79-7200](#)

Product Group: [Sieve Brushes](#)

Double-ended, brass and nylon bristle

Standards

ASTM E11

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Digital Asphalt Thermometer

Code: [47-0202](#)

Product Group: [Digital Asphalt Thermometer](#)

Comprises a hand-held digital thermometer with an operating range of -99 to +1372 °C with a switchable resolution between 0.1 and 1.0 °C. Operates on a 9V battery and utilises K-type thermocouple sensors.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Range	-50 to 1000°C
Resolution	Switchable 0.1 or 1.0°C
Weight	300 g



250 Asphalt Probe

Code: [47-0202/10](#)

Product Group: [Digital Asphalt Thermometer](#)

Has a heavy-duty and reinforced needle probe. It is built with a t-shaped polyethylene handle and has a maximum tip temperature of 250°C and a 300 mm long probe.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Max Reading	250°C
Length of probe	300 mm
Tip diameter (needle point)	6 mm



Portable Thermometer 100 ml

Code: [82-5247](#)

Product Group: [Portable Dial-type Thermometers](#)

50 mm diameter dial with a 180 mm long stem.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



AutoComp 100-A

Code: 45-6600/01

Product Group: Automatic Compaction

- Fully automatic, simple to operate
- Built-in safety features
- Uniform compaction
- Automatic blow counter

This ruggedly constructed automatic compactor provides a consistent and even degree of compaction. The unit incorporates a compaction pedestal comprising a laminated hardwood block secured to a concrete base by a 300 mm square x 25 mm thick steel plate. The mechanism lifts the 4535 g hammer and automatically releases it at the specified height of 457 mm. The conveniently positioned control fascia panel comprises of a mains light, start and stop buttons and a direct-reading counter used to set the required number of blows.

During operation the AutoComp 100-A automatically counts down to zero. Dual rammer pick-ups have been incorporated, reducing stress on the machine's internal mechanism.

Particular attention has been paid to operator safety by the inclusion of various in-built safety features.

Standards

EN 12697-10, EN 12697-30

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (l x w x h)	535 x 535 x 1880 mm
Compaction foot diameter	98.52 mm

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Sliding weight	4535 g
Height of drop	457 mm
Weight	278 kg



Compaction Mould

Code: 45-6310

Product Group: Accessories for manual and automatic compaction, Asphalt Compaction Mould

Comprising of mould body, baseplate and combined filling/extraction collar.

Standards

EN 12697-30, ASTM D6926, AASHTO T245

Specification

Construction	Machined seamless steel forming mold; base and collar.
Finish	Plated for rust resistance.
Dimensions	4" (101.6 mm) i.d. x 3" (76.2 mm) internal h. with base.
Weight	Net 6 lbs. (2.7 kg).



Paper Discs

Code: [45-6462](#)

Product Group: [Accessories for manual and automatic compaction, Filter Paper Discs](#)

Non-absorbent, 99 mm diameter, pack of 100.

Standards

EN 12697-30

Specification

Weight

Net 2.9 oz. (82 g).



Bench-Mounting Mixer 4.7Litre Capacity Complete with Bowl Beater and Whisk. 220-240V 50Hz 1Ph.

Code: [23-6191/01](#)

Product Group: [Sample Mixers](#), [Mixing](#), [Sample Mixers](#)

The mixer has two electrically switched mixing speeds which obviates the need to switch off during speed selection. The mixing head comprises a beater which contra-rotates about a central shaft using planetary gearing. A lever-acting lifting device facilitates the insertion and removal of the bowl. This mixer is suitable for the mixing of soil samples, mortar, bituminous mixtures and associated materials where comparatively small samples are being prepared. Supplied with stainless steel bowl, beater and whisk.

Standards

BS 598-107, BS 1377-1, BS 1924-1

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions	545 x 380 x 550 mm
Beater Speeds (rpm) low, high	140, 285
Central shaft speeds (rpm) low, high	62, 125
Rated power	500 W
Weight	50 kg

Spares/Consumables



Stainless Steel Bowl 4.73 Litres.

Code: [23-6191/10](#)



Isomantle Electric Heater

Code: [45-5580/01](#)

Product Group: [Sample Mixers](#), [Mixing](#), [Sample Mixers](#)

For use with 23-6191 Bench Mounting Mixer.

Standards

EN 12697-35

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Spatula 200 mm

Code: [81-0140](#)

Product Group: [Spatulas, Determination of Plastic Limit](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Aluminium Scoop Large

Code: [81-0220](#)

Product Group: [Slump Test, Scoops and Shovels](#)

Further Information

****Not available for sale in the USA****



Heat-Resistant Gloves, With Gauntlet

Code: [81-0508](#)

Product Group: [Miscellaneous Laboratory Hardware](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Proctor/Core Cutter Extruder Frame and Hydraulic Jack. Extrudes 100mm/4 Inch Diameter Specimens

Code: 23-4200

Product Group: [Accessories for manual and automatic compaction, Soil Extruders](#)

Adaptor plates will be supplied; extrudes samples from BS Compaction Mould, Proctor Mould 100 mm, Core Cutter and Marshall Mould. Maximum extrusion force 20kn.

Standards

BS 1377-1

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



30 L Heating Bath with Led Display Cover

Code: [45-6550/01](#)

Product Group: [Accessories for manual and automatic compaction](#)

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Marshall Test 50

Code: [45-6810/01](#)

Product Group: [Load frames](#)

- Geared screwjack and motor drive
- Precise speed
- Internal limit switch for both directions of travel
- Easy to use controls

This bench-mounting mechanical load frame is ruggedly constructed to encompass the strain and loads involved with the test. The unit is compact in size and can be quickly installed on a bench top, requiring only a power point. It has been designed for simple operation, is easy to clean and requires minimum maintenance.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Load frame, 50 kN capacity. Supplied without Breaking Head. For 220 - 240 V AC, 50 Hz, 1 ph.



50kN Load Measuring Ring

Code: 78-0860

Product Group: Clamped Boss Load Rings, Digital Tritest 50 Load Frame, Proving Rings, Accessories for the Marshall test, CBR-Test 50 Machine, Load Measurement, CBR Loading Press, Hand-Operated, Force measurement, Load Measurement

Calibrated in compression.

Standards

EN 12697-34

Specification

Capacity: kN, kgf, lbf	50.0, 5000, 11,200
Typical Design sensitivity: N/div, kgf/div, lbf/div	45.5, 4.54, 10.18
Overall height mm	248
Approx weight kg	7.9
Capacity	50 kN
Value of CBR	Above 40%
Capacity - lbf	11,200
Capacity - kN	50
Capacity - kgf	5,000
Typical Design Sensitivity - lbf/div	10.18
Typical Design Sensitivity - kN/div	45.5
Typical Design Sensitivity - Kgf/div	4.54
Overall Height	9.76" (248 mm)
Approx Weight	17.4 lbs.(7.9 kg)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: 78-5461



Breaking Head (Marshall)

Code: [45-6850](#)

Product Group: [Accessories for the Marshall test](#)

Complete with gauge disc. Supplied without flow meter.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Flow Meter BS/EN

Code: [45-6880](#)

Product Group: [Accessories for the Marshall test](#)

Dial gauge graduated 0.01 mm with 25 mm travel.
Supplied with stem brake unit and flow meter pedestal.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Cleveland Flash Cup Apparatus

Code: [46-3310/01](#)

Product Group: [Cleveland Flash Cup Apparatus](#)

The ELE Semi-Automatic Cleveland Open Cup flashpoint Tester is equipped with an electrically heated cup (with a variable control to set temperature rise rate), a button operated and electrically driven sweep arm and a test flame for use on natural gas. Bench mounted, the unit is incorporated in an easy to clean stainless steel case.

Standards

BS 2000-36, EN ISO 2592, ASTM D92, IP 36


Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

For 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Temperature Range	Ambient to 400°C
Power	500 W maximum
Ramp rate	Variable, manually controlled
Voltage	220/240 V, 50/60 Hz
Size (HxWxD)	33 x 31 x 29 cm
Weight	6.5 kg

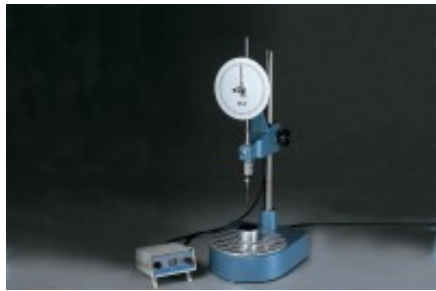

Semi-Automatic Penetrometer

Code: [46-5295/01](#)

Product Group: [Penetration Test](#)

As 46-5290 but incorporates Digital Automatic Controller which releases the needle assembly. The time set is displayed by a bright, easy to read display.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Penetration Needle

Code: [46-5360/10](#)

Product Group: [Penetration Test](#)

Hardened steel.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Transfer Dish

Code: [46-5800](#)

Product Group: [Bitumen Penetration Test](#), [Asphalt Penetrometer](#), [Penetration Test](#)

For use with ELE Penetrometer 46-5295.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49



Penetration Tin

Code: [46-5860](#)

Product Group: [Penetration Test](#)

For penetrations between 200 and 350,
approximately 70 mm diameter x 45 mm deep.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Penetration Tin

Code: [46-5861](#)

Product Group: [Penetration Test](#)

For penetrations below 200, approximately 55 mm diameter x 35 mm deep.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Constant Temperature Bath 21 - 56°C

Code: [46-5500/01](#)

Product Group: [Penetration Test](#)

A bench mounting bath specially designed for the conditioning of bitumen samples prior to penetration tests. Incorporating a highly accurate thermostat, the bath maintains a temperature between 21 and 56°C \pm 0.1°C (at ambient). An integral cover and deep tray for penetration testing are supplied as standard.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****Not available for sale in the USA****



Hotplate

Code: [78-2950/01](#)

Product Group: [Hotplate](#)

Further Information

****Not available for sale in the USA****

Specification

Construction	Cast-iron top and base ventilated sheet-steel body
Nominal diameter	200 mm
Maximum temperature	500°C
Rated power	2000 W
Weight	5 kg



Filter Paper - Fast

Code: [82-7861](#)

Product Group: [Filter Papers \(Box of 100\)](#)

No. 55 x 400 mm diameter.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



BS/EN Ring and Ball Apparatus

Code: [46-4605](#)

Product Group: [Ring and Ball Apparatus](#)

With 2 shouldered pattern rings, 2 ball-centring guides and 2 balls. The apparatus has a support frame and is retained in a heat resistant container.

Standards

EN 1427, BS 2000-58

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Magnetic Stirrer

Code: [46-4825/01](#)

Product Group: [Ring and Ball Apparatus](#)

Utilises a rotating magnetic field to induce variable speed stirring action. A built-in regulating transformer provides fine temperature control of liquid up to a maximum temperature of +150°C. The unit is suitable for use with the Ring and Ball Apparatus.

Standards

EN 1427, BS 2000-58

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****




Support Assembly

Code: [81-0094](#)

Product Group: [Stand, Bosshead and Clamp](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

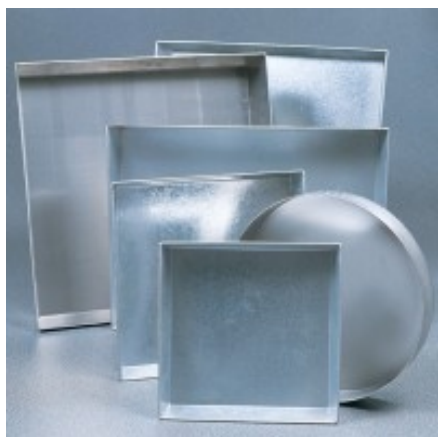

Sample Tray - 406 x 406 x 50 mm

Code: [81-4030](#)

Product Group: [Sample Trays](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****