



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 20/04/2016, and contains the following Products:

46-3310/01

Cleveland Flash Cup Apparatus

46-4605

BS/EN Ring and Ball Apparatus

46-4825/01

Magnetic Stirrer

45-6600/01

AutoComp 100-A

45-6810/01

Marshall Test 50

47-5175

Compact Core Drill

38-2010

Vicat Frame

45-6550/01

30 L Heating Bath with Led Display Cover

38-3800/01

Autoclave

39-0035/01

Automatic/Manual 5 litre nominal capacity Mortar Mixer

34-6250/01

Vibrating Table 600 X 400mm Table Top. 220-240V 50Hz 1Ph.. Supplied with clamping assm.

39-1150/01

Jolting Table 220 - 240 V 50 Hz

39-6160/01

ADR-Auto V2.0 250/25 Cement Machine C/W Compression and Flexural Jigs and Platen Sets

36-3090/01

ADR Touch 2000 Standard Compression Machine with Digital Readout.

37-6140

100kN Flexural and Transverse (Flags) Frame. Supplied Without Specimen Bearers and Fitting Kit.

78-1250/01

225 Litre Drying Oven

34-6575/01

Large Curing Tank C/W with Circulating Pump Heater/Thermostat Unit and Lower Rack

35-2302/09

Pundit Lab Ultrasonic Concrete Tester 110-240V 50/60Hz 1Ph

35-2025

Profoscope Rebar Detector and Covermeter

42-5305/01

Los Angeles Abrasion Machine Meets ASTM and European Standards. 220-240V 50Hz 1Ph.

26-2114/01

Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

27-1793

DS7.2 Direct and Residual Shear Strength Program for Windows 7, 32/64 bit

25-3518/01

Digital Tritest 50

26-1800/01

Pressure Test 1700 Oil/Water Constant Pressure System 0 to 1700Kpa 220-240V 50/60Hz 1Ph.

27-1500/01

GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

27-1753

DS7.2 Undrained Triaxial Shear Strength Program for Windows 7, 32/64 bit

25-4157

100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

24-9150/01

Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

25-0402

Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

27-1773

DS7.2 One-Dimensional Consolidation Program for Windows 7, 32/64 bit

27-1300/01

DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

24-0417/01

Motorised Liquid Limit Device W/ Counter BS 220-240V 50Hz 1Ph.

80-0200/01

ELE Sieve Shaker

36-1410/01

1000/500kN Motorised Compression/Tension Machine (complete with grips) 220-240V 50/60Hz 1Ph.



Cleveland Flash Cup Apparatus

Code: [46-3310/01](#)

Product Group: [Cleveland Flash Cup Apparatus](#)

The ELE Semi-Automatic Cleveland Open Cup flashpoint Tester is equipped with an electrically heated cup (with a variable control to set temperature rise rate), a button operated and electrically driven sweep arm and a test flame for use on natural gas. Bench mounted, the unit is incorporated in an easy to clean stainless steel case.

Standards

BS 2000-36, EN ISO 2592, ASTM D92, IP 36

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

For 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Temperature Range	Ambient to 400°C
Power	500 W maximum
Ramp rate	Variable, manually controlled
Voltage	220/240 V, 50/60 Hz
Size (HxWxD)	33 x 31 x 29 cm
Weight	6.5 kg



BS/EN Ring and Ball Apparatus

Code: [46-4605](#)

Product Group: [Ring and Ball Apparatus](#)

With 2 shouldered pattern rings, 2 ball-centring guides and 2 balls. The apparatus has a support frame and is retained in a heat resistant container.

Standards

EN 1427, BS 2000-58

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Magnetic Stirrer

Code: [46-4825/01](#)

Product Group: [Ring and Ball Apparatus](#)

Utilises a rotating magnetic field to induce variable speed stirring action. A built-in regulating transformer provides fine temperature control of liquid up to a maximum temperature of +150°C. The unit is suitable for use with the Ring and Ball Apparatus.

Standards

EN 1427, BS 2000-58

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



AutoComp 100-A

Code: 45-6600/01

Product Group: Automatic Compaction

- Fully automatic, simple to operate
- Built-in safety features
- Uniform compaction
- Automatic blow counter

This ruggedly constructed automatic compactor provides a consistent and even degree of compaction. The unit incorporates a compaction pedestal comprising a laminated hardwood block secured to a concrete base by a 300 mm square x 25 mm thick steel plate. The mechanism lifts the 4535 g hammer and automatically releases it at the specified height of 457 mm. The conveniently positioned control fascia panel comprises of a mains light, start and stop buttons and a direct-reading counter used to set the required number of blows.

During operation the AutoComp 100-A automatically counts down to zero. Dual rammer pick-ups have been incorporated, reducing stress on the machine's internal mechanism.

Particular attention has been paid to operator safety by the inclusion of various in-built safety features.

Standards

EN 12697-10, EN 12697-30

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification


Dimensions (l x w x h)	535 x 535 x 1880 mm
Compaction foot diameter	98.52 mm

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Sliding weight	4535 g
Height of drop	457 mm
Weight	278 kg

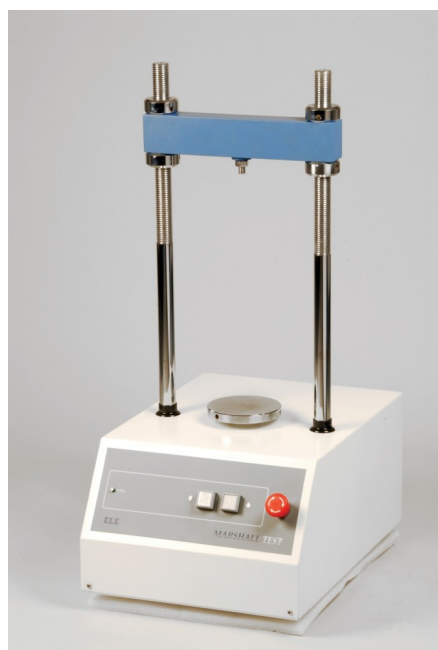

Marshall Test 50

Code: [45-6810/01](#)

Product Group: [Load frames](#)

- Geared screwjack and motor drive
- Precise speed
- Internal limit switch for both directions of travel
- Easy to use controls

This bench-mounting mechanical load frame is ruggedly constructed to encompass the strain and loads involved with the test. The unit is compact in size and can be quickly installed on a bench top, requiring only a power point. It has been designed for simple operation, is easy to clean and requires minimum maintenance.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Load frame, 50 kN capacity. Supplied without Breaking Head. For 220 - 240 V AC, 50 Hz, 1 ph.



Compact Core Drill

Code: 47-5175

Product Group: Compact Core Drill Machine

This compact and portable core drilling machine is designed to cut cores up to 150 mm diameter from concrete, asphalt and similar hard construction material.

The machine comprises a vertical support column which carries the drill head/motor assembly.

An integral water swivel is built into the drill head providing a 12 mm connection to an external water supply via 12 mm flexible hose (not supplied). The motor assembly comprises a 4 hp, 2-stroke petrol engine. Speeds of 800 rpm or 1200 rpm may be selected. A ball screw mechanism enables close control over drilling pressure and rapid return when drilling is completed.

The complete assembly is supplied on a rigid metal base frame with levelling facility and is suitable for vertically down drilling applications only.

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Special Note: Requires a continuous clean water supply via a 12 mm flexible hose (not supplied).



Vicat Frame

Code: 38-2010

Product Group: Vicat Method

Complete with consistency plunger, 10 mm diameter.
Requires one initial or final set needle to make up test weight to 300g.

Standards

EN 196-3, EN 13454-2, ASTM C187, ASTM C191

Further Information

NOT AVAILABLE FOR SALE IN THE USA

Spares/Consumables



Consistency Plunger

Code: 38-2010/10



30 L Heating Bath with Led Display Cover

Code: [45-6550/01](#)

Product Group: [Accessories for manual and automatic compaction](#)

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Autoclave

Code: [38-3800/01](#)

Product Group: [Soundness of Portland Cement by the Autoclave Method](#)

The autoclave provides high pressure steam curing of the specimens and is supplied with a safety valve pressure gauge and controlled heater unit. The pressure vessel is independently certified and certificated. A specimen rack with capacity for 12 specimens included. The unit conforms to the requirements of ASTM C151.

220-240 V 50/60 Hz 1ph

Standards

ASTM C151

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Spares/Consumables



Lid Sealing Gasket

Code: [38-3800/13](#)



Automatic/Manual 5 litre nominal capacity Mortar Mixer

Code: 39-0035/01

Product Group: Automatic/Manual 5 Litre Nominal Capacity Mortar Mixer

- New Microprocessor control
- New mix program selector
- Complies with latest EN Standards update
- Choice of automatic mixing cycles
- Sand and water dispenser supplied as standard

This mixer is designed to mix mortars and cement pastes to the requirements of the above Standards. The mixing paddle has a planetary motion and is driven by a motor with a microprocessor based speed and program controller. The mixer can be operated either in an automatic or manual mode. When the mixer is used in the manual mode, the two mixing speeds can be changed by means of a rocker switch, without switching off the motor. In the automatic mode any one of the preset mixing programs may be selected.

Standards

EN 196-1, EN 196-3, EN 413-2, EN 459-2, EN 1744-1, EN 13279-2, EN 1015-2, EN 13395-1, EN 13454-2, ISO 679, BS 3892-1, BS 3892-3, BS 6463-103, BS 4551-1

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Complete with bowl and paddle, sand and Water dispensers. For 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Dimensions (l x w x h)	530 x 350 x 580 mm
Speeds (rpm) Low, High	Paddle: 140 ± 5, 285 ± 10 Mixing Head: 62 ± 5, 125 ± 10
Rated Power	180 W
Bowl Capacity	5 litres approx.
Weight	54 kg

Spares/Consumables



Bowl

Code: [39-0031/11](#)



Paddle

Code: [39-0031/10](#)



Vibrating Table 600 X 400mm Table Top. 220-240V 50Hz 1Ph.. Supplied with clamping assm.

Code: [34-6250/01](#)

Product Group: [Vibrating Table](#)

Vibrating table mounted on a steel stand, supplied
with clamp assembly.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

3000 cycles per minute. For 220 - 240 V AC, 50 Hz, 1 ph.

Specification

Dimensions (table top)	600 x 400 mm
Maximum no. Cube moulds	2 x 150 mm ²
Clamp Assembly	Single
Weight	60 kg



Jolting Table 220 - 240 V 50 Hz

Code: [39-1150/01](#)

Product Group: [Jolting Table](#)

Supplied without moulds.

Standards

EN 196-1, EN 413-2, EN 459-2, EN 1744-1, EN 1015-10, EN 1015-11, EN 13454-2, ISO 679, BS 3892-1, BS 4551-1

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Spares/Consumables



Mortar Sand

Code: [39-1170](#)



Scraper

Code: [39-1130](#)



ADR-Auto V2.0 250/25 Cement Machine C/W Compression and Flexural Jigs and Platen Sets

Code: 39-6160/01

Product Group: [Activity Index](#), [ADR-Auto V2.0 250/25 Compression Machine](#)

- 250 kN maximum capacity
- Calibration accuracy to BS EN ISO 7500-1; ASTM E4
- Automatic loading cycle
- 25 kN low capacity frame supplied as standard
- Tests a wide variety of specimen sizes
- Tests mortar, lime, cement and Fly Ash
- Complete with compression/flexural jigs and platen sets
- Supplied with Windows(R) download software as standard

The ADR-Auto 250/25 Machine provides consistent automatic testing of a wide range of specimens. The machine comprises a standard ELE 250/25 kN load frame and ADR-Auto console and incorporates all the features included in the ADR-Auto series concrete testing machines.

As standard the machine is supplied with platens fitted to the load frame, compression jig with 40 mm and 50mm/2 inch square platen sets and flexural jig for testing 40.1 x 40 x 160 mm prisms.

The availability of the 25 kN low capacity load frame as standard extends the test capability of the machine for low strength compression or flexural testing. The automatic loading cycle is controlled by a closed loop microprocessor hydraulic system incorporated with the display in the ADR-Auto console attached to the load frame. A serial output port is built into the system, enabling test data to be stored in memory (up to 500 test results) for subsequent downloading to PC or suitable printer.

Standards

EN 196-1, EN 459-2, EN 1744, EN 1015-11, EN 13454-2, BS 3892-1, BS 4551-1, ASTM C109

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

For 220 - 240 V AC, 50 Hz, 1 ph.



ADR Touch 2000 Standard Compression Machine with Digital Readout.

Code: 36-3090/01

Product Group: General Purpose Compression Machines

- 2000 kN/450 000 lbf capacity
- Tests 150 and 100 mm concrete cubes or cylinders up to 320 x 160 mm diameter
- Supplied with Windows(R) download software as standard.

Incorporating the ADR Touch digital readout, the machines are designed to test cubes and cylinders in accordance with most International Standards. Supplied fitted for cylinder testing with safety gates. When used for cube testing appropriate distance pieces according to the size of specimen to be tested are required and must be ordered separately.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

The Standard range of compression machines has been designed to meet the need for a simple, economic and reliable means of testing concrete.

Whilst delivering all the features and reputation of the established ADR Series with its extensive design history, the new and improved user interface provides a high quality platform for testing that enhances the performance of ELE's compression machines.

New, sophisticated electronics further the benefits of simplified operation, whilst delivering the highest levels of accuracy in testing concrete and cement/mortar samples, satisfying the needs of Quality Control Managers, Lab Managers and Technicians.

ACCURACY & SAVINGS

The new ADR Touch Series, with 145mm (5.7") high resolution QVGA touch screen interface and intuitive menu-driven operation, reduces the time taken to set up the machine and perform tests, reducing the time to train staff by up to 25%.

- Up to 6 sample types can be set as favorites, enabling one-touch set up for repeat testing.
- Full, QWERTY touch pad for input of test data.

Most testing errors produce lower strength results. Noncompliant loading rates can generate errors in measured strength. The user interface includes real-time display of load vs. time, further ensuring accurate and consistent test results and providing "goodness of test" data to improve traceability in your QC operations.

TRACEABILITY & DATA QUALITY

The ADR range now provides improved data quality and traceability in due diligence cases - it is now possible to demonstrate traceability all the way from the machine/user to the accreditation body, increasing your reputation and peace of mind - all test results now come complete with the machine serial number attached.

- Enhanced USB data communications between PC and machine - eliminating the need for download software.

- Two gigabytes of storage memory.
- Full customization of sample sizes - stress calculations are automatically recalculated.

USER SAFETY

With full safety gates as standard, total systems diagnostics, ram run-out switches and overload warnings ensure the safety of your employees and the reliability of your machine.

Specification

Testing Standards	BS EN ISO 7500-1, ASTM E4
Capacity	2000 kN
Cubes (Concrete)	Up to 150 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	n/a
Flexural Testing	Via Flexural Frame
TFV and ACV	Yes
Voltage Supply	220-240V 50/60 Hz 1Ph.
Frame Type	Welded
Max vert. Clearance	340 mm
Max hor. Clearance	325 mm
Platen Sizes	Lower, Upper 222 mm
Max Ram Travel	50 mm

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output

Code: [6014A0062](#)



100kN Flexural and Transverse (Flags) Frame. Supplied Without Specimen Bearers and Fitting Kit.

Code: 37-6140

Product Group: [Flexural and Transverse Testing](#)

- Open sided for ease of specimen loading
- Meets EN 1339, 1340 for kerbs and flagstones
- Optional ball seating assembly

This rigidly constructed, open sided frame is suitable for testing kerbs and flagstones to EN 1339,1340. With optional accessories it can also be used to test 100 mm and 150 mm section beams for flexural strength to EN 12390-5.

The frame supports a hydraulic ram and upper subplaten assembly incorporating spherical seating. The upper and lower sub-platens will accept specimen loading bearers, which are supplied separately.

Further Information

****Not available for sale in the USA****



225 Litre Drying Oven

Code: 78-1250/01

Product Group: Percentage Refusal Density (PRD),
Oven Drying Method, Oven Drying Method, Oven
Drying Method

Standards

EN 12697-32, EN 13280-4, BS 598-104, BS 1377

Specification

Capacity	225 litres
External Dimensions (l x w x h)	540 x 1040 x 940
Internal Dimensions (l x w x h)	440 x 920 x 600
Fluctuation	$\pm 0.75^{\circ}\text{C}$
Rated power heater elements	2000 W
Shelves supplied	3
Shelf positions	4
Weight	80 kg



Large Curing Tank C/W with Circulating Pump Heater/Thermostat Unit and Lower Rack

Code: 34-6575/01

Product Group: Expansion (swell) Test Equipment, Large Curing Tank

This curing tank is supplied complete with a submersible pump, immersion heater/thermostat unit and separate control panel. The tank includes a lower rack as standard and is designed to maintain the temperature at $20 \pm 2^{\circ}\text{C}$, providing that the ambient temperature does not fall below 15°C or rise above 20°C .

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Supplied as specified. For 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Internal Dimensions	1040 x 1040 x 605 mm (l x w x h)
Capacity	650 litres
Rated Power	2000 watt
Weight	60 kg



Pundit Lab Ultrasonic Concrete Tester 110-240V 50/60Hz 1Ph

Code: [35-2302/09](#)

Product Group: [Pundit Lab](#), [Pundit Lab Ultrasonic Concrete Test](#)

Pundit Lab is the most versatile Pundit to date. It has all the functions of the classic Pundit 7, but offers additional benefits.

Designed with laboratory use in mind, its compact size, rugged construction and optimized power consumption make it equally suitable for on-site use.

Along with the traditional transit time and pulse velocity measurement, Pundit Lab offers path length measurement, perpendicular crack depth measurement and surface velocity measurement.

Optimized pulse shaping gives greater transmission range at lower voltage levels. This coupled with automated combination of the transmitter voltage and the receiver gain ensures an optimum received signal level, ensuring accurate and stable measurements.

The waveform can be viewed either via an external oscilloscope connection or directly on a connected PC screen.

Full remote control capability completes the package.

Complete with two 54 kHz transducers each with 3.6 metres of cable, coupling agent, carrying case and instruction manual.

Further Information

For 110 - 240 V AC, 50 - 60 Hz, 1 ph.

Spares/Consumables



Ultrasound Couplant Supplied In 250ml bottle

Code: [35-2305](#)



Profoscope Rebar Detector and Covermeter

Code: 35-2025

Product Group: Rebar Detection

The Profoscope is a versatile, fully-integrated rebar detector and cover meter with a unique real-time rebar visualization allowing the user to see the location of the rebar beneath the concrete surface to a maximum depth of 180 mm. This is coupled with rebar-proximity indicators and optical and acoustical locating aids. Rebar diameter can also be estimated within the specified testing range. The Profoscope combines these unique features in a compact, light device that allows the user to operate this rebar detector with one hand making the task of locating rebars a simple and efficient process. In addition, Proceq's rebar detector convinces through its intuitive user interface making rebar detection easy.

NOT AVAILABLE FOR SALE IN THE USA

Further Information

- A rebar detector with real-time visualization of the rebars beneath the instrument
- Visual indication of rebars in close proximity
- The Profoscope is a rebar detector with the ability to identify the mid-point between rebars as well as the orientation of rebars
- Optical and acoustical indication of rebar location and minimum cover alert
- This rebar detector offers neighboring bar correction
- Regional settings (metric, imperial)
- Cordless and single handed operation
- Switchable display backlight for dark environments
- A rebar detector with icon-based language independent menus
- Start-up test kit allows user to familiarize him/herself with all functions in a comfortable environment, wasting no time on site

Specification

Technical Data	Profoscope
Power Supply	2 x 1.5 V AA Batteries
Voltage Range	3.6 V to 1.8 V
Dimensions	205 x 92 x 41 mm (8 x 3.6 x 1.6")
Temperature Range	-10°C to 60°C (14°F to 140°F)
Humidity Range	0 to 100% rH
Protection Range	IP54



Los Angeles Abrasion Machine Meets ASTM and European Standards. 220-240V 50Hz 1Ph.

Code: [42-5305/01](#)

Product Group: [Los Angeles Abrasion Machine](#), [Los Angeles Abrasion Machine](#)

The machine consists of a closed hollow cylindrical steel drum rotating around its horizontal axis on ball bearing units mounted on a sturdy base framework.

The drum is driven at a speed of between 30 - 33 rpm via an enclosed belt drive arrangement from an electric motor/gearbox unit situated on the base frame. Inside the drum a full length steel shelf is attached, accessed by a dust-proof opening.

The cylinder incorporates a removable internal shelf, one shelf position is provided to meet the requirements of both the ASTM and EN test standards.

Controls are located easily on the right-hand side of the machine at convenient operator height.

Start and stop push buttons and a subtracting revolution counter allows the user to preset the number of revolutions before an automatic stop.

Standards

EN 1097-2, ASTM C131, ASTM C535, AASHTO T96, NF P18-573

Further Information

Less charges. For 220 - 240 V AC, 50 Hz, 1ph.

Specification

Capacity	5,000 g each of aggregate and charge.
Drum Speed	30-33 rpm.
Frame	Welded structural steel.
Counter	Adjustable; automatic shut-off; push-button reset and adjustment.
Controls	Magnetic motor starter with overload protection and integral On-Off switches.
Dimensions	38.6" w. x 36.2" d. x 38.6" h. (980 x 920 x 980 mm).
Weight	Net 882 lbs. (400 kg).

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Motor

1 HP



Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

Code: 26-2114/01

Product Group: Direct/Residual Shear Apparatus,
Direct/Residual Shear Apparatus

- Microprocessor control
- Large on-board LCD screen display
- Direct entry via touch sensitive keyboard
- Rapid approach and return to start datum
- Fully variable speed, 0.00001 to 9.99999 mm/minute
- Accepts specimens up to 100 mm square

The ELE Direct Shear Apparatus accepts specimens 60 mm, 100 mm square or 2.5 inches in diameter. The use of a microprocessor controlled drive system and keyboard entry gives the apparatus a wide range of features that include pause and speed reset during test, RS 232C interface, operator programming of speed and control functions, self test diagnostics and many other features. A return to start datum provides a positive means of reversing the shearbox when either preparing for a new test or continuing with residual testing procedures.

Safety forward/reverse travel limit switches are fitted as standard and monitored through the electronics system control.

The electronics are housed in a modern moulded shroud, which includes a large LCD display and keyboard entry. The apparatus is enclosed in a robustly constructed case, has been designed for floor mounting and is supplied complete with carriage, loading hanger and 10:1 lever loading device.

Standards

ASTM D3080, AASHTO T236, BS 1377, EN 1997-2

Further Information

for 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Sample Size

Accepts either 2.42", 2.5" diam.; 60 mm square samples using accessory shear box assemblies, not included.

Speed Range

Variable in either English or Metric units

Product Sheet

www.ele.com
+44 (0) 01525 249 200



	between 0.000001" (0.00001 mm) to 0.399999" (9.99999 mm) per minute.
Shear Force	1,000 lbf. (4.5 kN) maximum.
Vertical Load	2,200 lbf. (1,000 kN) using 10:1 lever ratio.
Dimensions	44.7" l. x 12 .6" w. x 49.6" h. (1,135 x 320 x 1,260 mm).
Weight	Net 181 lbs. (82 kg).

Spares/Consumables



Dial Indicator - 1.0" Range

Code: [88-4100](#)



DS7.2 Direct and Residual Shear Strength Program for Windows 7, 32/64 bit

Code: [27-1793](#)

Product Group: [DS7](#), [DS7.2 Direct/Residual Shear Software](#), [Automatic Data Acquisition](#)

This unique package provides test options for quick undrained or drained shear tests with the user selectable option of residual testing. Individual test results can be linked together to produce the Coulomb Envelope. Printouts and plots are available for sample description and basic test data such as moisture content, etc. Realtime plots of settlement, shear versus displacement and vertical displacement during shearing is readily available via the PC screen or printer.



Digital Tritest 50

Code: 25-3518/01

Product Group: Digital Tritest 50 Load Frame, Load Frames

- Microprocessor control
- Large on-board LED screen display
- Direct entry via a touch sensitive keyboard
- Rapid approach and return to datum of platen
- Fully variable speed, 0.00001 to 9.99999 mm/min
- Samples up to 100 mm diameter

This 50 kN capacity machine, designed primarily for triaxial testing of soil specimens up to 100 mm diameter x 200 mm long, comprises a rigid twin column construction with an integral fully variable microprocessor controlled drive unit and LCD display with a touch sensitive keyboard. The machine is normally bench mounted for ease of installation and operation.

The use of a microprocessor controlled drive system and keyboard entry provides the Digital Tritest 50 with a wide variety of features which include pause and speed reset during test, RS 232C, operator programming of speed and control functions, self test diagnostics and many other features.

A robustly constructed steel case houses the motor drive system with careful attention being given to the prevention of ingress of water or grit. All operating controls are mounted on the front panel of the machine, which is angled and recessed to prevent physical and environmental damage.

Standards

BS 1377-7, BS 1377-8, BS 1924-2, ASTM D1883, ASTM D2166, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180, AASHTO T193, AASHTO T208, AASHTO T296, AASHTO T297

Further Information

Complete with RS 232C interface.

Specification

Dimensions (l x w x h)	500 x 500 x 1470 mm
Max vertical clearance	910 mm
Horizontal clearance	364 mm
Platen diameter	133 mm
Platen travel	100 mm
Platen speed range	0.00001 to 9.99999 mm/min

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Rapid approach speed	25 mm/minute
Weight kg	140
Capacity	12 ,200 lbf. (50 kN).
Speed Range	English mode: 0.000001 to 0.399999 in/min. Metric mode: 0.00001 to 9.99999 mm/min.
Rapid Approach Speed	2.0 in/min. (50 mm/min.).
Platen Travel	3.9" (100 mm); limit switch protection.
Vertical Clearance	36 .8" (910 mm) maximum; 12 " (305 mm) minimum.
Horizontal Clearance	15 .3" (364 mm).
Serial Interface	RS232 C; programmable baud rate and protocol.
Overall Dimensions	19.7" w. x 19.7" d. x 57.8" h. (500 x 500 x 1,470 mm).
Weight	Net 220 lbs. (100 kg); Shpg. 300 lbs. (136 kg).



Pressure Test 1700 Oil/Water Constant Pressure System 0 to 1700Kpa 220-240V 50/60Hz 1Ph.

Code: 26-1800/01

Product Group: Oil/Water Constant Pressure System, Air/Water Pressure Systems - up to 1000 kPa

- 0 to 1700 kPa (250 lbf/in²) fully variable
- Continuous constant pressure control
- One litre capacity

The ELE oil/water constant pressure system , PressureTest 1700, is extremely versatile and can be used in conjunction of with a wide range of test equipment. The unit provides continuous variable pressure up to 1700 kPa. Pressure is increased or decreased simply by turning a control wheel.

The apparatus is supplied without a gauge for those customers who have suitable pressure monitoring equipment. A digital pressure gauge is offered as an accessory. The machine features a clear hydraulic/water interface reservoir and up to one litre capacity of water is available under pressure. • 0 to 1700 kPa (250 lbf/in²) fully variable.

Further Information

Dimensions (without gauge) 240 x 400 x 500 mm (l x w x h).

Spares/Consumables



Oil 5 Litres T46

Code: 26-1805



GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

Code: 27-1500/01

Product Group: Automatic data acquisition, Automatic Data Acquisition, Automatic data acquisition, Automatic Data Acquisition, Data Logging with the GDU, Geotechnical Data Acquisition Unit (GDU)

The GDU is a stand-alone, multi-tasking, multi-channel data logger, that is reliable and powerful, enabling it to co-ordinate test data from the range of ELE transducers required for various test methods.

The ELE Geotechnical Software package (DS7.1), in conjunction with the GDU and a range of transducers, are the two central components required to create a modern turnkey soil testing system. Being fully modular it can be adapted to a wide range of soil testing laboratory configurations.

- For performing CBR, Consolidation, Direct/Residual Shear and Total & Effective Stress Triaxial tests
- 8 Channels expandable to 32 for performing multiple, concurrent tests for cost savings
- Independent signal conditioning on each channel to maintain data accuracy
- Field-upgradeable software, meaning no downtime for future software and functionality upgrades
- Extended warranty.

Specification

Case	Aluminum, free standing; houses power supply, analog to digital conversion module and an 8-channel analog input module with transducer energization.
Sockets	Standard 5-pin DIN type.
Input Range	± 5 volts to ± 10 mV full scale.
Transducer Supply	10vDC.
Dimensions	12.8" w. x 14.3" d. x 6.1" h. (325 x 363 x 155 mm).
Weight	Net 14.08 lbs. (6.4 kg).



DS7.2 Undrained Triaxial Shear Strength Program for Windows 7, 32/64 bit

Code: [27-1753](#)

Product Group: [DS7](#), [DS7.2 Quick Undrained Triaxial Software](#), [Automatic Data Acquisition](#)

- Options for single or multi-stage testing on a sample
- Mohr circles produced for graphical analysis

Options are available for a single test on one sample, standard three-sample procedure with linking of the results, or for a multi-stage test on one sample. Load and strain are monitored through transducers. Various printouts and graphical plots are available including basic sample data, moisture content and density. The program tabulates shearing data and plots stress against strain. Mohr circles are produced for graphical analyses.



100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4157](#)

Product Group: [Triaxial Cell](#), [Triaxial Cells](#)

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/01](#)

Product Group: [Load frames](#)

- Single speed machine (BS/EN and ASTM)
- Rapid platen adjustment
- Complete with stabilising bar
- Compact, bench-mounting design
- Options for mechanical or electronic measurement


Designed for performing laboratory CBR tests to BS 1377, EN13286-47 and ASTM D1883, this bench mounting machine comprises a twin column frame incorporating a motorised drive system. Rapid adjustment of the platen is provided, which enables daylight to be taken up quickly and also close control of application of a seating load.

Standards

BS 1377, BS 1924, EN 13286-47, ASTM D1883, AASHTO T193

Specification

Dimensions (l x w x h)	550 x 400 x 1220 mm
Max vertical clearance	800 mm
Horizontal clearance	255 mm
Platen diameter	133 mm
Platen travel	105 mm
Weight kg	80

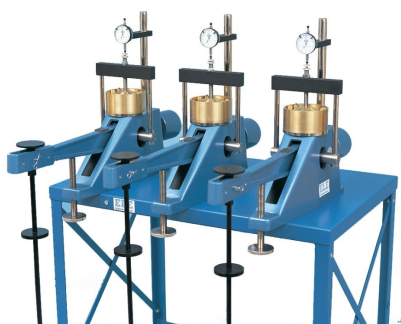

Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

Code: 25-0402

Product Group: Consolidation Apparatus, Table Top Consolidation Apparatus

- High capacity - 8800 kPa on 50 mm diameter specimens using 11:1 beam ratio
- Triple beam ratio, 9:1, 10:1, 11:1
- Compact unit ensures maximum space saving

The ELE Oedometer is rigidly constructed to ensure minimum frame distortion. The frame is designed to load the specimen through a yoke assembly and one of three alternative beam ratios. The beam is fitted with a counterbalance weight and beam support jack. The cell platform will accept the complete range of ELE consolidation cells and is fitted with a central spigot to ensure accurate centring of the cell under the loading yoke. Dimensions without hanger 711 x 203 x 508 mm (l x w x h). Weight 22 kg.

Standards

BS 1377, EN 1997-2, ASTM D2435, ASTM D4546, AASHTO T216

Further Information

Supplied without dial gauge and weights.

Specification

Load Capacity	48 tons/sq. ft. (5,148 kPa) on 2.5" (63 mm) diam. samples.
Loading Beam	Cast aluminum; counterbalanced; 9:1, 10:1 and 11:1 ratios.
Frame	Cast aluminum; integral beam support jack; plated steel and platform.
Dimensions	8" w. x 28" d. x 20" h. (203 x 711 x 508 mm), excluding weight hanger.
Weight	Net 30 lbs. (13.6 kg); Shpg. 40 lbs. (18.1 kg).




DS7.2 One-Dimensional Consolidation Program for Windows 7, 32/64 bit

Code: [27-1773](#)

Product Group: [DS7, DS7.2 One-Dimensional Consolidation Software](#)

DS7.1 Consolidation Software provides all basic functions needed to record and analyse consolidation test data. Options are available for monitoring settlement on a log time or square-root time basis. Printouts and graphical plots are available for all stages including M_v and C_v moisture content, voids ratio plots, and initial sample conditions.



DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

Code: [27-1300/01](#)

Product Group: [Electronic Instrumentation, Data Logging with the DSU, Data Logging with the DSU](#)

- Download the full brochure here [\[../../../../Page/the-new-dsu\]](#)
- 4 channel automatic control and data-logging unit
- Automatic, dual-frame control
- Performs CBR, Marshall, Unconfined Compression, Direct and Residual Shear, One-Dimensional Consolidation, Unconfined Undrained, Consolidated Drained and Unconsolidated Drained tests
- LAN connection - software can be running anywhere on your server
- Never lose data from power fails - 2 gigabytes of non-volatile memory
- Extended warranty

The Data System Unit (DSU) is a versatile instrument designed to accommodate the general logging requirements of geotechnical and materials testing engineers. Its intelligent interface allows the user to work with a range of different sensors.

Further Information

Become a member of the ELE International web site, add this new product to a wishlist to receive a quote! Click here [\[../../../../Login\]](#)

Please note that this product is not yet available in the USA, we will let you know as soon as it is ready!



Motorised Liquid Limit Device W/ Counter BS 220-240V 50Hz 1Ph.

Code: [24-0417/01](#)

Product Group: [Casagrande Method](#)

Complete with revolution counter and motor.

Standards

BS 1377, EN 1997-2



ELE Sieve Shaker

Code: [80-0200/01](#)

Product Group: [ELE Sieve Shaker](#)

The ELE sieve shaker is powered by an electromagnetic drive that has no rotating parts to wear making it maintenance free and extremely quiet in operation.

The unit features a triple Vertical-Lateral-Rotary vibrating action that moves the sample over the sieve producing faster more efficient sieving, while the rapid vertical movements also help keep the apertures from blinding.

The shaker is ideal for laboratory or on site use. It is robust, compact and sufficiently lightweight to be portable. The separate digital microprocessor controlled console unit incorporates a keypad for setting the sieving program and is isolated from any effects of vibration from the shaker.

As standard the shaker includes, timer 0-999 minutes, adjustable vibration intensity and adjustable intermittent or continuous operation.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

The unit accepts up to ten 200 mm or 8 inch, full height, diameter sieves and lid and receiver, or up to six 300 mm or 12 inch diameter sieves and lid and receiver. Complete as specified. Dimensions (l x w x h) 380 x 440 x 1085 mm. For 220 - 240 V AC, 50 Hz 1ph.



1000/500kN Motorised Compression/Tension Machine (complete with grips) 220-240V 50/60Hz 1Ph.

Code: 36-1410/01

Product Group: Compression Tension Machine

- Compression testing of concrete cubes and cylinders
- Calibration in compression is accurate to 1% of indicated load, satisfying BS EN ISO 7500-1; ASTM E4
- Self-aligning upper platen for compression tests
- Easily fitted grips for tension testing

The load frame is of high quality steel construction with a fixed upper head carrying a ball-seated platen. The ram carrying the lower platen is contained in the base of the frame and is protected by a shroud. Sufficient clearance between the platens allows the compression testing of concrete cylinders up to 160 mm diameter by 320 mm long. To allow for the compression testing of concrete cubes, a range of distance pieces is available.

Tension tests on steel reinforcing bars are conducted by replacing the platens with special grips. As standard the machine is supplied with the following size grips for testing bars, 10 mm, 12 mm, 20 mm, and 25 mm diameter. The machine is motorised, incorporating a change-over lever to select either compression or tension output from the pump.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

220-240V 50/60 Hz 1Ph.