



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 28/04/2016, and contains the following Products:

47-5175

Compact Core Drill

47-5565

Core Barrel 100 mm

47-5605

Core Barrel 150 mm

47-0202

Digital Asphalt Thermometer

47-0202/10

250 Asphalt Probe

29-3720

Dynamic Cone Penetrometer 8Kg Hammer (Trl Design).

35-2302/09

Pundit Lab Ultrasonic Concrete Tester 110-240V 50/60Hz 1Ph

47-3025

Travelling Beam Device

81-0590

Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

35-1480

Standard Concrete Test Hammer



Compact Core Drill

Code: 47-5175

Product Group: Compact Core Drill Machine

This compact and portable core drilling machine is designed to cut cores up to 150 mm diameter from concrete, asphalt and similar hard construction material.

The machine comprises a vertical support column which carries the drill head/motor assembly.

An integral water swivel is built into the drill head providing a 12 mm connection to an external water supply via 12 mm flexible hose (not supplied). The motor assembly comprises a 4 hp, 2-stroke petrol engine. Speeds of 800 rpm or 1200 rpm may be selected. A ball screw mechanism enables close control over drilling pressure and rapid return when drilling is completed.

The complete assembly is supplied on a rigid metal base frame with levelling facility and is suitable for vertically down drilling applications only.

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Special Note: Requires a continuous clean water supply via a 12 mm flexible hose (not supplied).



Core Barrel 100 mm

Code: [47-5565](#)

Product Group: [Core Barrels](#)

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Core Barrel 150 mm

Code: [47-5605](#)

Product Group: [Core Barrels](#)

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Digital Asphalt Thermometer

Code: [47-0202](#)

Product Group: [Digital Asphalt Thermometer](#)

Comprises a hand-held digital thermometer with an operating range of -99 to +1372 °C with a switchable resolution between 0.1 and 1.0 °C. Operates on a 9V battery and utilises K-type thermocouple sensors.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Range	-50 to 1000°C
Resolution	Switchable 0.1 or 1.0°C
Weight	300 g



250 Asphalt Probe

Code: [47-0202/10](#)

Product Group: [Digital Asphalt Thermometer](#)

Has a heavy-duty and reinforced needle probe. It is built with a t-shaped polyethylene handle and has a maximum tip temperature of 250°C and a 300 mm long probe.

Standards


BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Max Reading	250°C
Length of probe	300 mm
Tip diameter (needle point)	6 mm

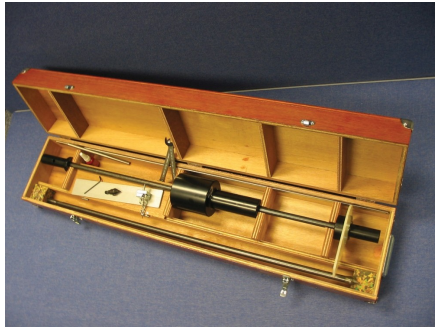

Dynamic Cone Penetrometer 8Kg Hammer (Trl Design).

Code: [29-3720](#)

Product Group: [In-situ Testing](#)

The TRL (Transport Research Laboratory) Dynamic Cone Penetrometer (DCP) is used for rapid in-situ measurement of the structural properties of existing road pavement constructed with unbound materials. The unit incorporates an 8 kg weight with a drop of 575 mm, and a 20 mm diameter cone fitted to the end of the shaft, allowing measurements to be made down to a depth of approximately 850 mm.

Readings are usually taken after a set number of blows, changing the number according to the strength of the layer being penetrated. For good granular bases, readings every five to ten blows are satisfactory, but for weaker sub-base layers and subgrades, readings every one to two blows may be appropriate.

The DCP requires three operators, one to hold the instrument in a vertical position, one to raise the hammer and let it fall and one to record the results. A typical test takes only a few minutes, providing a very efficient method of obtaining information which would otherwise require the excavation of test pits. Where pavement layers have different strengths, boundaries can be identified and layer thickness determined.

Further Information

Supplied complete with all necessary tools, assembly and operating instructions.

Spares/Consumables



Spare Cone for Dynamic Cone Penetrometer.

Code: [29-3720/10](#)



Pundit Lab Ultrasonic Concrete Tester 110-240V 50/60Hz 1Ph

Code: [35-2302/09](#)

Product Group: [Pundit Lab](#), [Pundit Lab Ultrasonic Concrete Test](#)

Pundit Lab is the most versatile Pundit to date. It has all the functions of the classic Pundit 7, but offers additional benefits.

Designed with laboratory use in mind, its compact size, rugged construction and optimized power consumption make it equally suitable for on-site use.

Along with the traditional transit time and pulse velocity measurement, Pundit Lab offers path length measurement, perpendicular crack depth measurement and surface velocity measurement.

Optimized pulse shaping gives greater transmission range at lower voltage levels. This coupled with automated combination of the transmitter voltage and the receiver gain ensures an optimum received signal level, ensuring accurate and stable measurements.

The waveform can be viewed either via an external oscilloscope connection or directly on a connected PC screen.

Full remote control capability completes the package.

Complete with two 54 kHz transducers each with 3.6 metres of cable, coupling agent, carrying case and instruction manual.

Further Information

For 110 - 240 V AC, 50 - 60 Hz, 1 ph.

Spares/Consumables



Ultrasound Couplant Supplied In 250ml bottle

Code: [35-2305](#)



Travelling Beam Device

Code: [47-3025](#)

Product Group: [Travelling Beam Device](#)

The 3 metre long Travelling Beam Device is used to check for any irregularities in both concrete and bituminous road surfaces. A sensing unit comprising a wheel connected to an indicator provides a magnification of 4:1.

Deviation of the surface from a straight-line is shown on a scale calibrated in increments of 2 mm up to 10 mm and 5 mm up to 25 mm. A dye-marker is fitted which may be used to identify suspect areas. Outrigger wheels provide mobility on site. The device is supplied as three sub-assemblies which are quickly assembled on site. The Travelling Beam is supplied fitted with an autographic recorder providing a permanent record of the surface profile. Records up to 1 kilometre can be recorded on the special chart paper rolls used.

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Spares/Consumables



Fibre-tipped Pen

Code: [47-3131](#)



Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

Code: [81-0590](#)

Product Group: [Determination of the Shape Index,](#)
[Miscellaneous Laboratory Hardware](#)

Dual measuring range highly accurate vernier caliper 0 to 200mm x 0.01mm (8 inch x 0.001 inch) to comply with bs 887 and bs 6365. Complete with liquid crystal display.

Standards

EN 933-4

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Standard Concrete Test Hammer

Code: [35-1480](#)

Product Group: [Concrete Test Hammer, Surface Hardness](#)

The hammer is intended for testing the quality of concrete in finished structures such as buildings and bridges. Supplied complete with carrying case and carborundum stone, the hammer is suitable for testing concrete with compressive strengths of 10 to 70 N/mm².

Standards

ASTM C805

Specification

Body	Includes indicator scale, calibration curves.
Calibration Curves	Rebound number vs. compressive strength.
Rubbing Stone	Prepares test surface.
Accuracy	Within 15 %.
Carrying Case	Plastic.
Weight	Net 3 lbs. (1.4 kg).

Spares/Consumables



Rubbing Stone

Code: [35-1475/10](#)