



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 16/12/2016, and contains the following Products:

---

78-5405/01

**Electronic Balance - 620 g x 0.001 g**

---

82-1900

**Measuring Cylinder - Plastic 1000 ml**

---

82-2170

**Desiccator - Vacuum**

---

45-9305/01

**Vacuum Pyknometer Apparatus**

---

24-4650

**Soil Hydrometer Type 151H ASTM D422 Graduated 0.995 to 1.038 Specific Gravity.**

---

24-4865/01

**Constant Temperature Bath 5 to 99.9 Deg.C X 0.1 Deg.C with Led Display and False Base Support.**

---

24-4125/01

**High Speed Stirrer Complete with Paddle Cup & Baffle. 220-240V 50/60Hz 1Ph.**

---

24-4145

**Sodium Hexametaphosphate 500G.**

---

24-0545/01

**Semi-Automatic Cone Penetrometer**

---

24-0811

**Rod Comparator**

---

81-0140

**Spatula 200 mm**

---

24-0430

**Glass Plate.**

---

29-3720

**Dynamic Cone Penetrometer 8Kg Hammer (Trl Design).**

---

46-6100/01

## Asphalt Binder Analyser 220-240V 50/60 Hz

---

46-5295/01

### Semi-Automatic Penetrometer

---

46-5500/01

### Constant Temperature Bath 21 - 56°C

---

46-5800

### Transfer Dish

---

46-5861

### Penetration Tin

---

46-5340/C

### Penetration Needle

---

46-5360/10

### Penetration Needle

---

46-4605

### BS/EN Ring and Ball Apparatus

---

46-4825/01

### Magnetic Stirrer

---

82-5272

### Thermometer

---

46-4150/01

### Rolling Thin-Film Oven 220-240V 50/60 Hz

---

45-6550/01

### 30 L Heating Bath with Led Display Cover

---

23-6191/01

### Bench-Mounting Mixer 5 Litre Capacity Complete with Bowl Beater and Whisk. 220-240V 50Hz 1Ph.

---

45-5580/01

### Isomantle Electric Heater

---

78-1250/01

### 225 Litre Drying Oven

---

81-4080

**Sample Tray - 610 x 610 x 63 mm**

---

42-1000/01

**Buoyancy Balance 6Kg X 0.1G. Supplied with Support Frame Water Tank & Suspension Hook.**

---

42-1005

**Wire Basket Brass with Handle Nominal 6000Cm<sup>3</sup> Capacity with 1.7mm Wire Mesh.**

---

78-5457/01

**Electronic Balance - 8 000 g x 0.1 g**

---

82-5270

**Non Hazardous Glass Thermometers -1 - +51°C**

---

47-0202

**Digital Asphalt Thermometer**

---

47-0202/14

**Surface Probe**

---

24-2885

**Pyknometer Complete with Non-Corrodable Cone and Rubber Seal 1Kg Capacity**

---

82-0200

**Beaker - 600 ml**

---

79-0070

**200mm Dia BS Sieve 63 Mic Stainless Steel Mesh.**

---

79-0090

**200mm Dia BS Sieve 90 Mic Stainless Steel Mesh.**

---

79-0110

**200mm Dia BS Sieve 125Mic Stainless Steel Mesh.**

---

79-0150

**200mm Dia BS Sieve 250Mic Stainless Steel Mesh.**

---

79-0190

**200mm Dia BS Sieve 500Mic Stainless Steel Mesh.**

---

---

79-0210

**200mm Dia BS Sieve 710Mic Stainless Steel Mesh.**

---

79-0230

**200mm Dia BS Sieve 1.00mm Stainless Steel Mesh.**

---

79-0270

**200mm Dia BS Sieve 2.00mm Stainless Steel Mesh.**

---

79-1500

**200mm Dia BS Sieve 4.00mm Perforated Plate.**

---

79-1540

**200mm Dia BS Sieve 8.00mm Perforated Plate.**

---

79-1580

**200mm Dia BS Sieve 16.0mm Perforated Plate.**

---

79-1605

**200mm Dia BS Sieve 25.0mm Perforated Plate.**

---

79-1630

**200mm Dia BS Sieve 31.5mm Perforated Plate.**

---



## Electronic Balance - 620 g x 0.001 g

Code: [78-5405/01](#)


Product Group: [Electronic Balances](#)

## Further Information

**\*\*Not available for sale in the USA\*\***

## Specification

Capacity resolution	620 g x 0.001 g
Pan size	125 x 125 mm
Mains and battery	No
Dimensions (l x w x h)	300 x 205 x 90 mm
Weight	6 kg

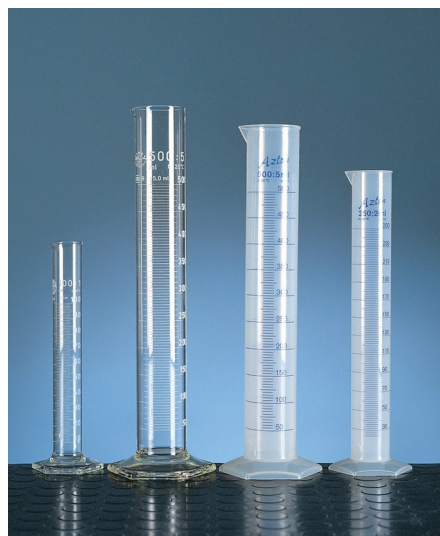

## Measuring Cylinder - Plastic 1000 ml

Code: [82-1900](#)

Product Group: [Measuring Cylinders, BS](#)

Plastic with spout, graduated to BS 5404.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Desiccator - Vacuum

Code: [82-2170](#)

Product Group: [Desiccators](#)

280 mm internal diameter, soda glass. Supplied with perforated zinc disc and stopcock.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***





## Vacuum Pyknometer Apparatus

Code: 45-9305/01

Product Group: Vacuum Pyknometer

- Large capacity design minimises segregation effects
- Lightweight polycarbonate construction
- Transparent top for visual observations

The Vacuum Pyknometer is a large capacity unit used in the Rice Test for determining the maximum specific gravity of bituminous paving mixtures.

The Pyknometer has a total volume of approximately 10 litres and will conveniently accept samples of 6000 grams to minimise segregation effects. The unit is constructed of lightweight polycarbonate, with the upper half being transparent for visual observation of the effects of the vacuum.

The Vacuum Pyknometer Apparatus consists of a 6000 g pyknometer, vacuum pump with control valves/gauges, water trap and connection tubing.

## Standards

EN 12697-5

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

Supplied complete with 6000 g pyknometer, vacuum pump with control valves/gauges, water trap and connection tubing. For 220 - 240 V AC, 50 Hz, 1ph.

## Specification

Dimensions	273 x 406 mm (outside diameter x height)
Capacity	Approx. 10 litres, 6000 g sample weight
Connections	Water inlet valve; quick disconnect for vacuum gauge and hose
Weight	3.6 kg



## Soil Hydrometer Type 151H ASTM D422 Graduated 0.995 to 1.038 Specific Gravity.

Code: [24-4650](#)

Product Group: [ASTM Soil Hydrometers, Soil Hydrometers](#)

Graduated 0.995 to 1.038 g/ml.

## Standards

ASTM D422, ASTM E100, AASHTO T88

## Specification

Construction	Molded, seamless.
Scale	Bouyoucos; double scale.
Calibration	At 68°F.
Weight	Net 4 oz. (113 g).



## Constant Temperature Bath 5 to 99.9 Deg.C X 0.1 Deg.C with Led Display and False Base Support.

Code: [24-4865/01](#)

Product Group: [Constant Temperature Bath](#)

This compact, bench-top stirrer is used for dispersing soil samples in water for hydrometer analysis. The stirrer is supplied complete with Mixing Paddle and Dispersion Cup. Weight 4 kg.

## Further Information

Specially designed for the sedimentation testing of soils and other fine grained material, the bath is supplied with a false bottom to assist in circulation of the bath liquid. Will accommodate six Sedimentation Cylinders.

## Specification

Dimensions (l x w x h)	535 x 210 x 610 mm external
Capacity	Holds up to 6 sedimentation cylinders
Construction	Stainless steel with toughened glass front
Temperature Control	Heater/thermostat/circulation with digital controller unit 5 to 99.9 Deg.C X 0.1 Deg.C
Power	1500 watts
Weight kg	12



## High Speed Stirrer Complete with Paddle Cup & Baffle. 220-240V 50/60Hz 1Ph.

Code: [24-4125/01](#)

Product Group: [Mechanical Analysis Stirrer](#)

Compact bench top stirrer used for dispersing soil samples in water. Supplied complete with mixing paddle and dispersion cup with baffle. Beaker position maintained by column retainer.

## Standards

BS 1377, ASTM D422, AASHTO T88

## Spares/Consumables



### Mixing Paddle for 24-4125 Series High Speed Stirrer

Code: [24-4125/10](#)



### Soil Dispersion Cup & Baffle.

Code: [24-4125/11](#)



## Sodium Hexametaphosphate 500G.

Code: [24-4145](#)

Product Group: [Sodium Hexametaphosphate,](#)  
[Mechanical Analysis Stirrer](#)

## Standards

ASTM D422, AASHTO T88, ASTM E100

## Spares/Consumables



## Solid Rubber Stopper

Code: [4699-0881](#)



## Semi-Automatic Cone Penetrometer

Code: [24-0545/01](#)

Product Group: [Semi-Automatic Cone Penetrometer](#),  
[Semi-Automatic Cone Penetrometer](#)

Bench mounted apparatus to determine the liquid limit of soils to BS1377. This method is applicable to a wide range of soils. The apparatus is fitted with a 150mm diameter dial indicator for direct reading of penetration. Supplied complete with 30deg, 30mm long test cone. Manufactured from stainless steel and includes adjustable levelling feet.

Incorporates Digital Automatic controller, which releases the plunger head and ensures free falling of the penetration device during the test. The time set is displayed by a bright easy to read display.

## Standards

BS 1377, BS 1924-2, EN 1997-2

## Specification

Dial Indicator	150 mm diameter graduated in 400 x 0.1 mm divisions. Indicator incorporates a friction/gear system.
Height	Adjustable using rapid integral clamping mechanism.
Cone Release Cone	Semi-Automatic 1 x 30°, 35 mm test cone included.
Base	Cast aluminum with adjustable leveling feet.
Weight	Net 19 lbs. (8.64 kg).

## Spares/Consumables



## Penetration Test Cone

Code: [24-0544](#)



## Rod Comparator

Code: [24-0811](#)

Product Group: [Rod Comparator, Determination of Plastic Limit](#)

3mm diameter rod comparator to BS1377.

## Standards

BS 1924-2, EN 1997-2, ASTM D4318, BS 1377, AASHTO T90



## Spatula 200 mm

Code: [81-0140](#)

Product Group: [Spatulas, Determination of Plastic Limit](#)

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***





## Glass Plate.

Code: [24-0430](#)

Product Group: [Casagrande Method, Determination of Plastic Limit](#)

500 mm square x 10 mm thick.

## Standards

BS 1377-2



## Dynamic Cone Penetrometer 8Kg Hammer (Trl Design).

Code: [29-3720](#)

Product Group: [In-situ Testing](#)

The TRL (Transport Research Laboratory) Dynamic Cone Penetrometer (DCP) is used for rapid in-situ measurement of the structural properties of existing road pavement constructed with unbound materials. The unit incorporates an 8 kg weight with a drop of 575 mm, and a 20 mm diameter cone fitted to the end of the shaft, allowing measurements to be made down to a depth of approximately 850 mm.

Readings are usually taken after a set number of blows, changing the number according to the strength of the layer being penetrated. For good granular bases, readings every five to ten blows are satisfactory, but for weaker sub-base layers and subgrades, readings every one to two blows may be appropriate.

The DCP requires three operators, one to hold the instrument in a vertical position, one to raise the hammer and let it fall and one to record the results. A typical test takes only a few minutes, providing a very efficient method of obtaining information which would otherwise require the excavation of test pits. Where pavement layers have different strengths, boundaries can be identified and layer thickness determined.

## Further Information

Supplied complete with all necessary tools, assembly and operating instructions.

## Spares/Consumables



### Spare Cone for Dynamic Cone Penetrometer.

Code: [29-3720/10](#)



## Asphalt Binder Analyser 220-240V 50/60 Hz

Code: 46-6100/01

Product Group: Ignition Method

Designed to measure the asphalt binder content of hot mix asphalt (HMA) using loss on ignition, in accordance with AASHTO T 308-10, ASTM D6307-10 and BSEN 12697-39:2012.

### Further Information

The integral microprocessor controlled weighing and calculation system is configurable to allow variations to the standard test method. Test result reports are available in both printed and software format. The high temperature afterburner minimises the production of noxious waste fumes. Supplied complete with 2 sets of sample baskets.

#### Features:

- Designed to measure asphalt binder content by loss on ignition
- Avoids health, environmental and waste management issues
- Avoids the expense associated with older solvent extraction methods
- Reduced emissions due to high temperature afterburner
- Controlled via a multi-lingual touchscreen interface
- English, Spanish, French, Chinese, Italian and Russian language display
- Other languages are available to order
- Automatic calculation of final sample weight and binder % result
- Adjustable aggregate correction factor
- Average test times from 20 mins for 6 mm aggregates, to 45 mins for 40 mm aggregates
- Permanent (dot-matrix) printed reports
- USB data output compatible with most spread sheets
- Easy naming, storage and recall of recipes that can be transferred between units
- Simplified menu structure with secure 'Supervisor' and 'Operator' settings
- Metal waste gas extraction pipe
- Factory fitted thermocouple access port, if temperature calibration is to be carried out
- Precise weight measurements, displayed to 0.1g resolution
- Capacity for large sample sizes for more accurate results (max. sample is 4.5kg)

### Specification

Max Temp (°C)	750
Dimensions: Internal (HxWxD)	220 x 450 x 350 mm
Dimensions: External (HxWxD)	980 x 600 x 775 mm


# Product Sheet

[www.ele.com](http://www.ele.com)  
+44 (0) 01525 249 200



Type  
Thermocouple type  
Max power (W)

Bench-top  
K  
8000

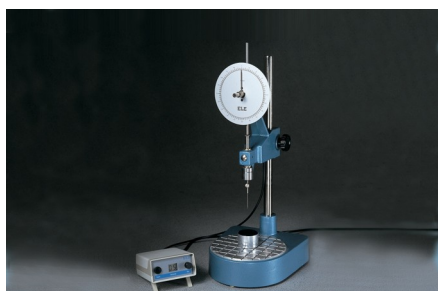

## Semi-Automatic Penetrometer

Code: [46-5295/01](#)

Product Group: [Penetration Test](#)

As 46-5290 but incorporates Digital Automatic Controller which releases the needle assembly. The time set is displayed by a bright, easy to read display.

## Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Spares/Consumables



## ASTM (Non-Certified) Penetration Needle

Code: [46-5290/10](#)



## Constant Temperature Bath 21 - 56°C

Code: [46-5500/01](#)

Product Group: [Penetration Test](#)

A bench mounting bath specially designed for the conditioning of bitumen samples prior to penetration tests. Incorporating a highly accurate thermostat, the bath maintains a temperature between 21 and 56°C  $\pm$  0.1°C (at ambient). An integral cover and deep tray for penetration testing are supplied as standard.

## Further Information

\*\*Not available for sale in the USA\*\*



## Transfer Dish

Code: [46-5800](#)

Product Group: [Bitumen Penetration Test](#), [Asphalt Penetrometer](#), [Penetration Test](#)

For use with ELE Penetrometer 46-5295.

## Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49



## Penetration Tin

Code: [46-5861](#)

Product Group: [Penetration Test](#)

For penetrations below 200, approximately 55 mm diameter x 35 mm deep.

## Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***





## Penetration Needle

Code: [46-5340/C](#)

Product Group: [Penetration Test](#)

Hardened steel, supplied with an UKAS verification certificate. For testing to BS 2000-49 and ASTM D5. (Pack contains 1 needle only).

## Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Penetration Needle

Code: [46-5360/10](#)

Product Group: [Penetration Test](#)

Hardened steel.

## Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## BS/EN Ring and Ball Apparatus

Code: 46-4605

Product Group: [Ring and Ball Apparatus](#)

With 2 shouldered pattern rings, 2 ball-centring guides and 2 balls. The apparatus has a support frame and is retained in a heat resistant container.

## Standards

EN 1427, BS 2000-58, UNI 4161, UNE 7111, DIN 52011, NFT66-008, AASHTO T53, ASTM D36, BS 2000

## Further Information

\*\*NOT AVAILABLE FOR SALE IN THE USA\*\*



## Magnetic Stirrer

Code: [46-4825/01](#)

Product Group: [Ring and Ball Apparatus](#)

Utilises a rotating magnetic field to induce variable speed stirring action. A built-in regulating transformer provides fine temperature control of liquid up to a maximum temperature of +150°C. The unit is suitable for use with the Ring and Ball Apparatus.

## Standards

EN 1427, BS 2000-58

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Thermometer

Code: [82-5272](#)

Product Group: [Non Hazardous Glass Thermometers, Ring and Ball Apparatus](#)

Mercury-free with a range of -10.0°C to + 210.0°C and graduated every 1°C. Immersion up to 76 mm

## Standards

EN 1427, BS 2000-58

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Rolling Thin-Film Oven 220-240V 50/60 Hz

Code: 46-4150/01

Product Group: [Asphalt and Bitumen Ovens](#)

The Rolling Thin-Film Oven (RTFO) procedure provides simulated short term aged asphalt binder for physical property testing. Asphalt binder is exposed to elevated temperatures to simulate manufacturing and placement ageing. The RTFO also provides a quantitative measure of the volatiles lost during the ageing process.

The exterior is constructed from sheet steel finished in an easy clean powder coated paint and the interior chamber is made from stainless steel.

The control system comprises of a microprocessor digital controller and overheat thermostat with calibrated scale and tamper-proof lock.

## Further Information

- Complies to the requirements of ASTM D2872
- Internal dimensions (mm): 380 high x 480 wide x 440 deep
- External dimensions (mm): 800 high x 710 wide x 660 deep (add 40mm for door handle)
- Double wall construction with high density thermal insulation
- Non-rusting grade 304 stainless steel interior
- Easy clean powder painted steel exterior in light grey (RAL 7035) textured finish
- Top mounted fan constructed with an air plenum as described in ASTM D2872
- Fitted with a squirrel-type fan blade for better uniformity of air and temperature distribution
- Equipped with air jet for blowing heating air into each bottle at its lowest point of travel
- Base mounted elements
- Vented to atmosphere
- Single front opening, side hinged door with positive quarter turn latching mechanism
- Double glazed window in door for viewing the test chamber

Top mounted controls comprise:

- Dual display microprocessor digital control
- Independent overheat thermostat
- Mains switch
- Flow meter to control air flow
- Indicator lamps
- 1500 watts
- Supplied with built-in 305mm diameter vertical circulator carriage for 8 sample containers
- Glass samples rotate at 15 rpm  $\pm$  0.2rpm (glass containers supplied separately)
- Temperature is controlled and pre-set at 163°C  $\pm$  1°C

## Specification

Max Temp (°C)	163°C $\pm$ 1°C (preset)
Dimensions: Internal (HxWxD)	380 x 480 x 440 mm

# Product Sheet

[www.ele.com](http://www.ele.com)  
+44 (0) 01525 249 200



Dimensions: External (HxWxD)	800 x 710 x 660 mm
Insulation	Double wall
Internal material	304 stainless steel
Max power (W)	1500



## 30 L Heating Bath with Led Display Cover

Code: [45-6550/01](#)

Product Group: [Accessories for manual and automatic compaction](#)

### Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***





## Bench-Mounting Mixer 5 Litre Capacity Complete with Bowl Beater and Whisk. 220-240V 50Hz 1Ph.

Code: [23-6191/01](#)

Product Group: [Sample Mixers](#), [Mixing](#), [Sample Mixers](#)

The mixer has two electrically switched mixing speeds which obviates the need to switch off during speed selection. The mixing head comprises a beater which contra-rotates about a central shaft using planetary gearing. A lever-acting lifting device facilitates the insertion and removal of the bowl. This mixer is suitable for the mixing of soil samples, mortar, bituminous mixtures and associated materials where comparatively small samples are being prepared. Supplied with stainless steel bowl, beater and whisk.

## Standards

BS 598-107, BS 1377-1, BS 1924-1

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Specification

Dimensions	545 x 380 x 550 mm
Beater Speeds (rpm) low, intermediate, high	136, 281, 580
Central shaft speeds (rpm) low, high	60, 124, 255
Rated power	500 W
Weight	20.2 kg

## Spares/Consumables



### Stainless Steel Bowl 4.73 Litres.

Code: [23-6191/10](#)



## Isomantle Electric Heater

Code: [45-5580/01](#)

Product Group: [Sample Mixers, Mixing, Sample Mixers](#)

For use with 23-6191 Bench Mounting Mixer.

## Standards

EN 12697-35

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 225 Litre Drying Oven

Code: 78-1250/01


Product Group: Percentage Refusal Density (PRD),  
Oven Drying Method, Oven Drying Method, Oven  
Drying Method

## Standards

EN 12697-32, EN 13280-4, BS 598-104, BS 1377

## Specification

Capacity	225 litres
External Dimensions (l x w x h)	540 x 1040 x 940
Internal Dimensions (l x w x h)	440 x 920 x 600
Fluctuation	± 0.75°C
Rated power heater elements	2000 W
Shelves supplied	3
Shelf positions	4
Weight	80 kg

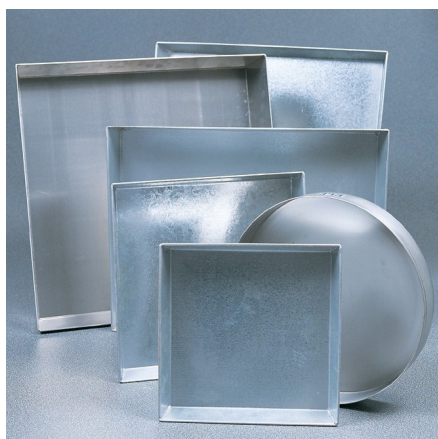

## Sample Tray - 610 x 610 x 63 mm

Code: [81-4080](#)

Product Group: [Sample Trays](#)

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## **Buoyancy Balance 6Kg X 0.1G. Supplied with Support Frame Water Tank & Suspension Hook.**

Code: [42-1000/01](#)

Product Group: [Particle Density \(specific gravity\) and Water Absorption for Coarse Aggregates](#)

The buoyancy balance system developed by ELE consists of a rigid support frame, incorporating a water tank mounted on a platform. A mechanical lifting device is used to raise the water tank through the frame height immersing the specimen suspended below the balance. The balance supplied may also be used as a standard weighing device, thus providing a versatile and comprehensive weighing system in the laboratory. 6000 g x 0.1 g supplied with frame, water tank and suspension hook.

### **Standards**

EN 1097-6, EN 12697-6, BS 812, ASTM C127, AASHTO T85

### **Further Information**

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

For 220 - 240 V AC, 50 - 60 Hz, 1 ph.



## Wire Basket Brass with Handle Nominal 6000Cm<sup>3</sup> Capacity with 1.7mm Wire Mesh.

Code: 42-1005

Product Group: Particle Density (specific gravity) and  
Water Absorption for Coarse Aggregates

For BS 812 Relative Density. 200 mm diameter x 190  
mm deep, 1.70 mm wire mesh.

### Standards

EN 1097-6, EN 12697-6, BS 812, ASTM C127, AASHTO T85

### Further Information

\*\*NOT AVAILABLE FOR SALE IN THE USA\*\*



## Electronic Balance - 8 000 g x 0.1 g

Code: [78-5457/01](#)

Product Group: [Electronic Balances](#)

## Further Information

**\*\*Not available for sale in the USA\*\***

## Specification

Capacity resolution	8000 g x 0.1 g
Pan size	225 x 300 mm
Mains and battery	Yes
Dimensions (l x w x h)	340 x 320 125 mm
Weight	4 kg



## Non Hazardous Glass Thermometers -1 - +51°C

Code: [82-5270](#)

Product Group: [Non Hazardous Glass Thermometers](#)

0.1°C divisions + total immersion

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***





## Digital Asphalt Thermometer

Code: [47-0202](#)

Product Group: [Digital Asphalt Thermometer](#)

Comprises a hand-held digital thermometer with an operating range of -99 to +1372 °C with a switchable resolution between 0.1 and 1.0 °C. Operates on a 9V battery and utilises K-type thermocouple sensors.

## Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Specification

Range	-50 to 1000°C
Resolution	Switchable 0.1 or 1.0°C
Weight	300 g



## Surface Probe

Code: [47-0202/14](#)

Product Group: [Digital Asphalt Thermometer](#)

130 mm long Ribbon-Type surface probe with a maximum tip temperature of 500 °C.

## Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Specification

Max Reading	500°C
Length of probe	6 mm
Tip diameter (needle point)	4 mm



## Pyknometer Complete with Non-Corrodable Cone and Rubber Seal 1Kg Capacity

Code: [24-2885](#)

Product Group: [Particle Density: Pyknometer  
Methods, Pycnometer Top and Jar](#)

Glass jar complete with noncorrodible cone.

### Standards

BS 1377, BS 812-2, EN 1097-7, EN 1997-2, ASTM D854, AASHTO T100, ASTM C128, AASHTO T84



## Beaker - 600 ml

Code: [82-0200](#)

Product Group: [Beakers and Covers](#)

Borosilicate glass, squat form.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 63 Mic Stainless Steel Mesh.

Code: [79-0070](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 90 Mic Stainless Steel Mesh.

Code: [79-0090](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 125Mic Stainless Steel Mesh.

Code: [79-0110](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 250Mic Stainless Steel Mesh.

Code: [79-0150](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***





## 200mm Dia BS Sieve 500Mic Stainless Steel Mesh.

Code: [79-0190](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, EN933-2, ISO 565

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 710Mic Stainless Steel Mesh.

Code: [79-0210](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, EN933-2, ISO 565

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 1.00mm Stainless Steel Mesh.

Code: [79-0230](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 2.00mm Stainless Steel Mesh.

Code: [79-0270](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, EN933-2, ISO 565

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 4.00mm Perforated Plate.

Code: 79-1500

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

### Standards

BS 410-1, ISO 3310, EN933-2, ISO 565

### Further Information

\*\*NOT AVAILABLE FOR SALE IN THE USA\*\*



## 200mm Dia BS Sieve 8.00mm Perforated Plate.

Code: [79-1540](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 16.0mm Perforated Plate.

Code: 79-1580

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

\*\*NOT AVAILABLE FOR SALE IN THE USA\*\*



## 200mm Dia BS Sieve 25.0mm Perforated Plate.

Code: 79-1605

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

### Standards

BS 410-1, ISO 3310

### Further Information

\*\*NOT AVAILABLE FOR SALE IN THE USA\*\*





## 200mm Dia BS Sieve 31.5mm Perforated Plate.

Code: 79-1630

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***