



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 20/12/2016, and contains the following Products:

38-2010

Vicat Frame

38-2015/01

Automatic Vicat Apparatus

34-6250/01

Vibrating Table 600 X 400mm Table Top. 220-240V 50Hz 1Ph. Supplied with clamping assembly

36-3090/01

ADR Touch 2000 Standard Compression Machine with Digital Readout.

36-4125/01

ADR-Auto V2.0 2000 Standard Compression Machine

34-3265

Air Entrainment Meter B Type Complete with Carrying Case. Supplied with Aluminium Tamping Bar.

34-6575/01

Large Curing Tank C/W with Circulating Pump Heater/Thermostat Unit and Lower Rack

34-0110

Slump Cone

47-0202/10

250 Asphalt Probe



Vicat Frame

Code: [38-2010](#)

Product Group: [Vicat Method](#)

Complete with consistency plunger, 10 mm diameter.
Requires one initial or final set needle to make up test weight to 300g.

Standards

EN 196-3, EN 13454-2, ASTM C187, ASTM C191

Further Information


****NOT AVAILABLE FOR SALE IN THE USA****

Spares/Consumables



Consistency Plunger

Code: [38-2010/10](#)

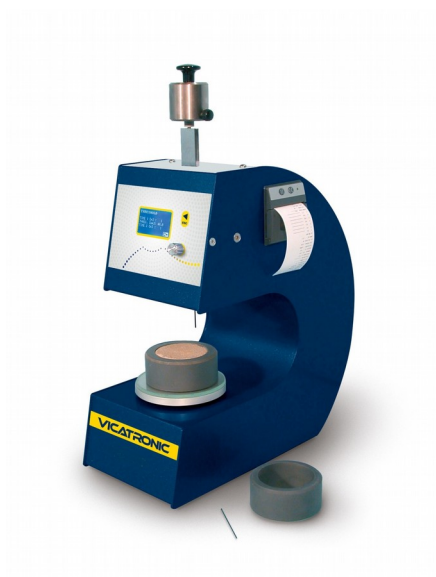

Automatic Vicat Apparatus

Code: [38-2015/01](#)

Product Group: [Automatic Vicat](#)

Complete with EN and ASTM Initial and Final needles, Consistency Plunger, Windows(R) software and RS232 cable, 1 x EN and ASTM Mould and Glass Plate. Suitable for continuous use in saturated humidity, at a controlled temperature of $20^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

Standards

ASTM C187, ASTM C191

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****


For 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Spares/Consumables



ASTM Initial and Final Set Needle

Code: [38-2023](#)



Consistency Plunger

Code: [38-2015/16](#)



EN Initial and Final Set Needle

Code: 38-2021



Vibrating Table 600 X 400mm Table Top. 220-240V 50Hz 1Ph. Supplied with clamping assembly

Code: [34-6250/01](#)

Product Group: [Vibrating Table](#)

Vibrating table mounted on a steel stand, supplied with clamp assembly.

Standards

EN 12390-2, EN 12350-6, EN 12350-7

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

3000 cycles per minute. For 220 - 240 V AC, 50 Hz, 1 ph.

Specification

Dimensions (table top)	600 x 400 mm
Maximum no. Cube moulds	2 x 150 mm ²
Clamp Assembly	Single
Weight	60 kg

Alternatives



100 X 100 X 500mm Beam Mould.

Code: [34-5003](#)



100mm Cube Mould 2-Part Clamp Type. Cast Iron Construction. BS EN Compliant.

Code: [34-4650](#)



100mm Cube Mould 4-Part Clamp Type. Cast Iron Construction. BS EN Compliant.

Code: [34-4520](#)



100mm Dia Cylinder Mould 200mm Long.

Code: [34-5210](#)



150 X 150 X 750mm Beam Mould.

Code: [34-5053](#)



150mm Cube Mould 2-Part Clamp Type. Cast Iron Construction. BS EN Compliant.

Code: [34-4670](#)



150mm Cube Mould 4-Part Clamp Type. Cast Iron Construction. BS EN Compliant.

Code: [34-4570](#)



150mm Dia Cylinder Mould 150mm Long.

Code: [34-5230](#)



150mm Dia Cylinder Mould 300mm Long.

Code: [34-5260](#)



200mm Cube Mould Clamp Type. Cast Iron Construction. Stamped Mould Sections. EN Compliant.

Code: [34-4620](#)



ADR Touch 2000 Standard Compression Machine with Digital Readout.

Code: 36-3090/01

Product Group: General Purpose Compression Machines

- 2000 kN/450 000 lbf capacity
- Tests 150 and 100 mm concrete cubes or cylinders up to 320 x 160 mm diameter
- Supplied with Windows(R) download software as standard.

Incorporating the ADR Touch digital readout, the machines are designed to test cubes and cylinders in accordance with most International Standards. Supplied fitted for cylinder testing with safety gates. When used for cube testing appropriate distance pieces according to the size of specimen to be tested are required and must be ordered separately.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

The Standard range of compression machines has been designed to meet the need for a simple, economic and reliable means of testing concrete.

Whilst delivering all the features and reputation of the established ADR Series with its extensive design history, the new and improved user interface provides a high quality platform for testing that enhances the performance of ELE's compression machines.

New, sophisticated electronics further the benefits of simplified operation, whilst delivering the highest levels of accuracy in testing concrete and cement/mortar samples, satisfying the needs of Quality Control Managers, Lab Managers and Technicians.

ACCURACY & SAVINGS

The new ADR Touch Series, with 145mm (5.7") high resolution QVGA touch screen interface and intuitive menu-driven operation, reduces the time taken to set up the machine and perform tests, reducing the time to train staff by up to 25%.

- Up to 6 sample types can be set as favorites, enabling one-touch set up for repeat testing.
- Full, QWERTY touch pad for input of test data.

Most testing errors produce lower strength results. Noncompliant loading rates can generate errors in measured strength. The user interface includes real-time display of load vs. time, further ensuring accurate and consistent test results and providing "goodness of test" data to improve traceability in your QC operations.

TRACEABILITY & DATA QUALITY

The ADR range now provides improved data quality and traceability in due diligence cases - it is now possible to demonstrate traceability all the way from the machine/user to the accreditation body, increasing your reputation and peace of mind - all test results now come complete with the machine serial number attached.

- Enhanced USB data communications between PC and machine - eliminating the need for download software.

- Two gigabytes of storage memory.
- Full customization of sample sizes - stress calculations are automatically recalculated.

USER SAFETY

With full safety gates as standard, total systems diagnostics, ram run-out switches and overload warnings ensure the safety of your employees and the reliability of your machine.

Specification

Testing Standards	BS EN ISO 7500-1, ASTM E4
Capacity	2000 kN
Cubes (Concrete)	Up to 150 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	n/a
Flexural Testing	Via Flexural Frame
TFV and ACV	Yes
Voltage Supply	220-240V 50/60 Hz 1Ph.
Frame Type	Welded
Max vert. Clearance	340 mm
Max hor. Clearance	325 mm
Platen Sizes	Lower, Upper 222 mm
Max Ram Travel	50 mm

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output

Code: [6014A0062](#)

Alternatives



ADR Touch 1500 Compression Machine with Digital Readout.

Code: [36-0720/01](#)



ADR-Auto V2.0 2000 Standard Compression Machine

Code: 36-4125/01

Product Group: General Purpose Compression Machines

ADR-Auto V2.0 2000 Standard supplied complete with safety gates ready for testing 300 x 150 mm diameter cylinders. When used for cube testing distance pieces of the appropriate size must be ordered separately.

Further Information

Not available for sale in the USA

Whilst delivering all of the features and reputation of the established ADR-Auto V2.0 range with its 20 year design history, the new and improved user interface provides a high quality platform for testing that will enhance the performance of our compression machines. New, sophisticated electronics further the benefits of a closed-loop operation in testing concrete and cement/ mortar samples, satisfying the requirements of Quality Control Managers, Lab Managers and Technicians alike.

ACCURACY & SAVINGS

The NEW ADR-Auto V2.0 range, with 145mm (5.7") touch screen interface and intuitive menu driven operation reduces the time taken to set up the machine and perform tests, reducing the time to train staff by up to 25%. Most testing errors produce lower strength results. Noncompliant loading rates can generate errors in measured strength. With the latest closed-loop technology used in the ADR-Auto V2.0, the most effective cement ratios can be used with confidence.

TRACEABILITY & DATA QUALITY

The ADR-Auto V2.0 now provides improved data quality and traceability in due diligence cases - it is now possible to display traceability all the way from the machine/user to the accreditation body, increasing your reputation and peace of mind - all test results now come complete with the machine serial number attached. Prove your service quality - the ADR-Auto V2.0 now plots load vs time in real-time, proving full compliance to the testing standard. This data can be stored for later use or for detailed analysis of the concrete production.

USER SAFETY

Full safety gates as standard, total systems diagnostics, ram run-out switches and overload warnings ensure the safety of your employees and the reliability of your machine.

Specification

Testing Standards	BS EN ISO 7500-1, ASTM E4
Capacity	2000 kN
Cubes (Concrete)	Up to 150 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	n/a
TFV and ACV	Yes

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Voltage Supply	220-240 V 50 Hz 1 Ph
Frame Type	Welded
Max vert. Clearance	340 mm
Max hor. Clearance	325 mm
Platen Sizes	Lower , Upper 222 mm
Overall Dimensions	480 x 765 x 1050 mm

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output

Code: [6014A0062](#)

Alternatives



ADR-Auto V2.0 2000 Standard Compression Machine

Code: [36-4125/02](#)



ADR-Auto V2.0 2000 Standard Compression Machine

Code: [36-4125/06](#)



Air Entrainment Meter B Type Complete with Carrying Case. Supplied with Aluminium Tamping Bar.

Code: 34-3265

Product Group: Precision Air Entrainment Meter, Precision Air Entrainment Meter

- 7 litre capacity
- Shock-proof pressure gauge mounting
- Lightweight aluminum construction
- Heavy-duty plastic carrying case for easy transport to site

The proper control of entrained air in concrete is recognized as one of the most important functions in modern concrete manufacture. For the concrete engineer, the ELE Precision Air Entrainment Meter offers an instrument for the testing and designing of concrete mixes.

The instrument is designed so that the operating parts form an integral unit. The container is rigid, thus providing an accurate device for the performance of unit weight testing. For convenience, the tare weight in grams is stamped on the bottom. When used with the supplied nomograph, the air meter provides quick and easy particle density and percent of free moisture in aggregate determinations.

Standards

ASTM C231, AASHTO T152

Specification

Capacity	7 Litres
Readings	Up to 22% entrained air
Accuracy	1/4% full scale
Aggregate Size	2" (50.8 mm) maximum
Container	With tare weight stamped on bottom; 2-piece clamping device for positive seal.
Water	4 oz required
Initial Pressure	Approx. 10 strokes needed
Pressure Gauge	In shock-proof mounting
Tamping Rod	Aluminium; 24" (610 mm) long
Dimensions	9-3/4" diam. X 13-1/4" h. (248 x 337 mm)
Weight	Net 15 lbs (8 kg)

Spares/Consumables



Concrete Air Indicator

Code: [38-3280/10](#)



Gauge Kit

Code: [34-3265/12](#)



Pump Assembly

Code: [34-3265/10](#)



Soft Headed Mallet.

Code: [29-5020](#)



Stopwatch

Code: [81-0521](#)

Alternatives



Concrete Air Indicator Kit

Code: 34-3280



Press-Ur-Meter Type A

Code: 34-3267



Volumetair

Code: 34-3272



Large Curing Tank C/W with Circulating Pump Heater/Thermostat Unit and Lower Rack

Code: [34-6575/01](#)

Product Group: [Expansion \(swell\) Test Equipment, Large Curing Tank](#)

This Large Curing Tank is supplied complete with a submersible pump, immersion heater/thermostat unit and separate control panel. The tank includes a lower rack as standard and is designed to maintain the temperature at $20 \pm 2^{\circ}\text{C}$, providing that the ambient temperature does not fall below 15°C or rise above 20°C .

Standards

EN 12390-2, ASTM C31, AASHTO T23

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Supplied as specified. For 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Internal Dimensions	1040 x 1040 x 605 mm (l x w x h)
Capacity	650 litres
Rated Power	2000 watt
Weight	60 kg

Alternatives



Jolting Table 220 - 240 V AC 60 Hz

Code: [39-1150/06](#)



Slump Cone

Code: [34-0110](#)

Product Group: [Slump Cones, Slump Test](#)

Complies with EN 12350-2, ASTM C143 and AASHTO T119

Standards

ASTM C143, ASTM C192, AASHTO T23, AASHTO T119, ASTM T126

Specification

Construction	Seamless, heavy-gauge spun steel; 0.45" (1.1 mm) min. Thickness.
Finish	Plated for rust and corrosion resistance.
Dimensions	100 mm top diam. X 200 mm bottom diam. (without foot pieces) x 300 mm h.
Weights	Net 5.5 lbs (2.5kg)

Spares/Consumables



Stopwatch

Code: [81-0521](#)

Alternatives



Metal Slump Cone - English

Code: [34-0108](#)



250 Asphalt Probe

Code: [47-0202/10](#)

Product Group: [Digital Asphalt Thermometer](#)

Has a heavy-duty and reinforced needle probe. It is built with a t-shaped polyethylene handle and has a maximum tip temperature of 250°C and a 300 mm long probe.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Max Reading	250°C
Length of probe	300 mm
Tip diameter (needle point)	6 mm

Alternatives



Breaking Head (Marshall)

Code: [45-6850](#)



Vibrating Hammer

Code: [47-0455/01](#)