



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 06/01/2017, and contains the following Products:

24-9198

BS Cbr Mould Body.

24-9200

BS Extension Collar

24-9202

BS Perforated Base Plate.

24-9204

BS Solid Base or Top Plate

24-9206

Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

24-9208

C-Spanner for BS Cbr Mould. Two Required.

24-9210

Base Plate Tool for BS Mould

24-9212

Static Compaction Plug.

24-9214

2Kg Annular Surcharge Weight

24-9216

2Kg Split Surcharge Weight.

24-9260

Swell Plate

24-9262

Swell Stand

24-9275

Dial Gauge 25mm Travel X 0.01mm Divisions.

78-0060

Clamped Boss Load Ring - 2.0 kN

78-0860

50kN Clamped Boss Load Ring

24-9182

Penetration Piston

24-9188

Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

25-3650

Unconfined Compression Platens. for Use on Ele Load Frames Max Sample Dia 95mm.

24-9220

Filter Papers 150mm Dia Equivalent to Whatman No 1. Box of 100.

24-9186

Penetration Dial Gauge BS

83-4170/01

Muffle Furnace

82-3320

Porcelain Crucible

82-2170

Desiccator - Vacuum

24-9228

ASTM Cbr Mould Complete with Collar & Perforated Base

24-9238

ASTM Spacing Disc.

81-3545

Transport/Storage Container

25-3700/01

MultiPlex 50 Load Frame

34-8100/09

Buoyancy Balance

34-8105

Cradle

42-1005

Wire Basket Brass with Handle Nominal 6000Cm³ Capacity with 1.7mm Wire Mesh.

42-1000/01

Buoyancy Balance 6Kg X 0.1G. Supplied with Support Frame Water Tank & Suspension Hook.

42-0600

Set of Flakiness Sieves Comprising 1 Ea 4.9mm 7.2mm 10.2mm 14.4mm 19.7mm 26.3mm and 33.9mm

42-0410

Flakiness Gauge.

42-0820

Length Gauge

36-0720/01

ADR Touch 1500 Compression Machine with Digital Readout.

37-4980

Standard Distance Piece - 20 mm Depth

37-5000

Standard Distance Piece - 50 mm Depth

37-5020

Standard Distance Piece - 60 mm Depth

37-5050

Standard Distance Piece - 80 mm Depth

42-4300

150mm Aggregate Crushing Value Apparatus. Supplied Complete with Metal Measure and Tamping Rod.

42-4500

75mm Aggregate Crushing Value Apparatus. Supplied Complete with Metal Measure and Tamping Rod.

42-4580

Tamping Rod 8mm Dia X 300mm.

88-7940

Rubber Mallet

34-0110

Slump Cone

34-0130

Tamping Rod 16mm Dia X 600mm long hemispherical at both ends.

34-0140

300 mm Stainless Steel Rule.

34-0160

Base Plate for Slump Test.



BS Cbr Mould Body.

Code: [24-9198](#)
Product Group: [BS EN CBR mould, Accessories for BS compaction and CBR](#)

Standards

ASTM D1883, AASHTO T193

Specification

Mould	152 x 127 mm (inside diameter x height)
Collar	51 mm height, fits both ends of mould
Base plate	Solid, fits both ends of mould
Construction	All steel, plated
Weight kg	7.3



BS Extension Collar

Code: [24-9200](#)

Product Group: [BS EN CBR mould accessories](#),
[Accessories for BS compaction and CBR](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



BS Perforated Base Plate.

Code: [24-9202](#)

Product Group: [BS EN CBR mould accessories](#)

To fit mould body

Standards

EN 13286-4, BS 1377-4, BS 1924-2

Accessories



BS Solid Base or Top Plate

Code: [24-9204](#)

Alternatives



BS Solid Base or Top Plate

Code: [24-9204](#)



BS Solid Base or Top Plate

Code: [24-9204](#)

Product Group: [BS EN CBR mould accessories](#),
[Accessories for BS compaction and CBR](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2

Accessories




2Kg Annular Surcharge Weight

Code: [24-9214](#)



Base Plate Tool for BS Mould

Code: [24-9210](#)



BS Perforated Base Plate.

Code: [24-9202](#)



Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

Code: [24-9206](#)



Filter Papers 150mm Dia Equivalent to Whatman No 1. Box of 100.

Code: [24-9220](#)

Alternatives



2Kg Annular Surcharge Weight

Code: [24-9214](#)



Base Plate Tool for BS Mould

Code: [24-9210](#)



BS Perforated Base Plate.

Code: [24-9202](#)



Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

Code: [24-9206](#)



Filter Papers 150mm Dia Equivalent to Whatman No 1. Box of 100.

Code: [24-9220](#)



Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

Code: [24-9206](#)

Product Group: [BS EN CBR mould accessories](#)

To fit BS/EN mould body.

Standards

EN 13286-4, BS 1377-4, BS 1924-2


Accessories



BS Solid Base or Top Plate

Code: [24-9204](#)

Alternatives



BS Solid Base or Top Plate

Code: [24-9204](#)



C-Spanner for BS Cbr Mould. Two Required.

Code: [24-9208](#)

Product Group: [BS EN CBR mould accessories](#)

To fit BS/EN CBR moulds and collars. Two required.

Standards

BS 1377-4, BS 1924-2, EN 13286-4



Base Plate Tool for BS Mould

Code: [24-9210](#)

Product Group: [BS EN CBR mould accessories](#)

To fit into base plate to assist removal from mould body.

Standards

EN 13286-4, BS 1377-4, BS 1924-2

Accessories



BS Solid Base or Top Plate

Code: [24-9204](#)

Alternatives



BS Solid Base or Top Plate

Code: [24-9204](#)



Static Compaction Plug.

Code: [24-9212](#)

Product Group: [BS EN CBR mould accessories](#)

Steel, 150 mm dia x 51 mm thick. Complete with removable handle.

Standards

EN 13286-4, BS 1377-4, BS 1924-2



2Kg Annular Surcharge Weight

Code: [24-9214](#)

Product Group: [BS EN CBR mould accessories](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2

Accessories



BS Solid Base or Top Plate

Code: [24-9204](#)

Alternatives



BS Solid Base or Top Plate

Code: [24-9204](#)



2Kg Split Surcharge Weight.

Code: [24-9216](#)

Product Group: [BS EN CBR mould accessories](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



Swell Plate

Code: [24-9260](#)

Product Group: [Expansion \(swell\) Test Equipment, Swell Plate](#)

With adjustable stem.

Standards

ASTM D1883, AASHTO T193

Specification

Base Plate	5 15/16" diam. (150.8mm); perforated.
Contact Head	Adjustable; locks on stem with knurled nut.
Construction	Aluminium
Weight	Net 2-1/2 lbs. (1.1 kg).



Swell Stand

Code: [24-9262](#)

Product Group: [Expansion \(swell\) Test Equipment, Tripod Attachment](#)

For mounting Swell Dial Gauge in position on CBR mould collar.

Standards

ASTM D1883, AASHTO T193

Further Information

Requires dial indicator; not included, order separately

Specification

Construction	Machined, one-piece cast aluminum.
Contact Head	Integral part of ssembly; holds dial indicator.
Construction	2" I. (50.8 mm) included.
Weight	Net 1 lb. (0.4 kg).


Accessories



Mechanical Dial Indicator - 25 mm Range Clockwise Movement

Code: [88-4110](#)

Spares/Consumables



Dial Indicator - 1.0" Range

Code: [88-4100](#)

Alternatives



Electronic Digital Indicator, 1.0"/25.4 mm range

Code: [88-4220](#)



Dial Gauge 25mm Travel X 0.01mm Divisions.

Code: [24-9275](#)

Product Group: [Expansion \(swell\) Test Equipment](#)

25 mm travel x 0.01 mm.



Clamped Boss Load Ring - 2.0 kN

Code: 78-0060

Product Group: Digital Tritest 50 Load Frame,
Direct/Residual Shear Apparatus, Proving Rings,
Force measurement, Measurement of Load (Shear
Stress), Clamped Boss Load Rings

Standards

BS 1377, ASTM D3080

Specification

Capacity: kN, kgf, lbf	2.0, 200, 450
Typical Design sensitivity: N/div, kgf/div, lbf/div	1.3, 0.13, 0.30
Overall height mm	248
Approx weight kg	3.2
Capacity - lbf	450
Capacity - kN	2
Capacity - kgf	200
Typical Design Sensitivity - lbf/div	0.3
Typical Design Sensitivity - kN/div	1.3
Typical Design Sensitivity - Kgf/div	0.13
Overall Height	9.76" (248 mm)
Approx Weight	7 lbs. (3.2 kg)

Accessories



50kN Clamped Boss Load Ring

Code: 78-0860



Clamped Boss Load Ring - 10.0 kN

Code: 78-0460



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 450 lbs (2.0 kN)

Code: [78-0064](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)




Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 450 lbs (2.0 kN)

Code: [78-0064](#)



50kN Clamped Boss Load Ring

Code: 78-0860

Product Group: Digital Tritest 50 Load Frame, Load Measurement, Proving Rings, CBR-Test 50 Machine, Load Measurement, CBR Loading Press, Hand-Operated, Force measurement, Accessories for the Marshall Test, Accessories for the Marshall test, Clamped Boss Load Rings

Calibrated in compression.

Standards

EN 12697-34

Specification

Capacity: kN, kgf, lbf	50.0, 5000, 11,200
Typical Design sensitivity: N/div, kgf/div, lbf/div	45.5, 4.54, 10.18
Overall height mm	248
Approx weight kg	7.9
Value of CBR	Above 40%
Capacity - kN	50
Capacity - kgf	5000
Capacity - lbf	11,200
Typical Design Sensitivity - kN/div	45.5
Typical Design Sensitivity - Kgf/div	4.54
Typical Design Sensitivity - lbf/div	10.18
Overall Height	9.76" (248 mm)
Approx Weight	17.4 lbs.(7.9 kg)

Accessories



Clamped Boss Load Ring - 10.0 kN

Code: 78-0460



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 11,200 lbs (50.0 kN)

Code: [78-0864](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 11,200 lbs (50.0 kN)

Code: [78-0864](#)



Penetration Piston

Code: [24-9182](#)

Product Group: [Penetration Measurement](#)

1.935 mm² (3 in²) area foot of case hardened steel.
Designed to fit all ELE load rings.



Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

Code: [24-9188](#)

Product Group: [In-situ CBR](#), [Conversion of In-situ to Laboratory CBR](#), [Penetration Measurement](#)

Dual purpose mounting bracket for CBR penetration dial gauges. Allows gauge to be fixed to penetration piston or load ring.

Standards

BS 1377, BS 1924



Unconfined Compression Platens. for Use on Ele Load Frames Max Sample Dia 95mm.

Code: [25-3650](#)

Product Group: [N/A](#)

Standards

ASTM D2166, AASHTO T208, BS 1377, BS 1924, EN 13286-47, ASTM D1883, AASHTO T193



Filter Papers 150mm Dia Equivalent to Whatman No 1. Box of 100.

Code: [24-9220](#)

Product Group: [BS EN CBR mould accessories](#)

Box of 100.

Standards

EN 13286-4, BS 1377-4, BS 1924-2

Accessories



BS Solid Base or Top Plate

Code: [24-9204](#)

Alternatives



BS Solid Base or Top Plate

Code: [24-9204](#)



Penetration Dial Gauge BS

Code: [24-9186](#)

Product Group: [In-situ CBR](#), [Conversion of In-situ to Laboratory CBR](#), [Penetration Measurement](#)

Complete with rack extensions and chisel edge anvil. 25 mm travel x 0.01 mm divisions.

Standards

BS 1377, BS 1924



Muffle Furnace

Code: [83-4170/01](#)

Product Group: [Furnaces](#), [Loss-on-Ignition](#),
[Loss-on-Ignition](#)

Standards

EN 196-2, EN 459-2, EN 13454-2, BS 1016-4, ISO 344, ISO 1171, ASTM D2361, ASTM D2795, ASTM D3714

Specification

External Dimensions (l x w x h)	545 x 385 x 400 mm
Work chamber dimensions (l x w x h)	300 x 200 x 120 mm
Internal volume	6.9 litres
Maximum temperature	1200 °C
Electrical supply	220 – 240 V AC, 50 - 60 Hz, 1 ph
Power supply	3500 W
Weight	130 kg

Spares/Consumables



Controller, for use in 83-4170/01

Code: [83-4170/11](#)



Element heating for use in 83-4170

Code: [83-4170/14](#)



Element/Chamber complete, heating, for use in 83-4170/01

Code: [83-4170/12](#)



Refractory brick for 83-4170/01

Code: [83-4170/13](#)



Thermostat, KGrade, 370 long, dia 2.5, for 83-4170/01

Code: [83-4170/10](#)

Alternatives



Heat of Hydration Apparatus

Code: [38-4600/01](#)



Heat of Hydration Apparatus

Code: [38-4600/06](#)



Rotatest 1500

Code: [45-3810/01](#)



Rotatest 3000

Code: [45-3815/01](#)



Porcelain Crucible

Code: [82-3320](#)

Product Group: [Loss-on-Ignition, Bottles and Crucibles](#)

30ml capacity complete with lid.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Alternatives



Heat of Hydration Apparatus

Code: [38-4600/01](#)



Heat of Hydration Apparatus

Code: [38-4600/06](#)



Desiccator - Vacuum

Code: [82-2170](#)

Product Group: [Desiccators](#)

280 mm internal diameter, soda glass. Supplied with perforated zinc disc and stopcock.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)

Product Group: [ASTM/AASHTO CBR mould](#)

With collar and perforated baseplate.

Standards

ASTM D1883, AASHTO T193

Specification

Mould	152.4 x 177.8 mm (inside diameter x height)
Collar	50.8 mm height, fits both ends of mould
Base plate	Perforated
Construction	All steel, plated
Weight kg	9

Accessories



4.5Kg Annular Surcharge Weight ASTM.

Code: [24-9243](#)



5 Lb. Annular Surcharge Weight ASTM.

Code: [24-9245](#)



ASTM Cutting Collar.

Code: [24-9236](#)



ASTM Spacing Disc.

Code: [24-9238](#)

Alternatives



4.5Kg Annular Surcharge Weight ASTM.

Code: [24-9243](#)



5 Lb. Annular Surcharge Weight ASTM.

Code: [24-9245](#)



ASTM Cutting Collar.

Code: [24-9236](#)



ASTM Spacing Disc.

Code: [24-9238](#)



ASTM Spacing Disc.

Code: [24-9238](#)

Product Group: [Spacer Discs, ASTM/AASHTO CBR mould accessories](#)

150.8 mm diameter x 61.4 mm deep.

Specification

Construction

Steel; machined on all sides.

Finish

Plated.

Weights

Net 18.9 lbs. (8.6 kg).

Accessories



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)

Alternatives



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)



Transport/Storage Container

Code: [81-3545](#)

Product Group: [Moisture Content Tin and Sample Containers](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



MultiPlex 50 Load Frame

Code: [25-3700/01](#)

Product Group: [Data Logging with the DSU](#), [CBR Load Frames](#), [Marshall Load Frames](#), [Triaxial Load Frames](#), [Data Logging with the DSU](#)

Compact bench mounting load frame designed for performing laboratory CBR, unconfined compression, Quick Undrained Triaxial and Marshall Stability Tests. Has a variable speed of 0.5 to 50.8mm per minute and features rapid approach of platen.

Standards

EN 12697-34, BS 598, BS 1377, BS 1924, ASTM D1883, EN 12697-23, EN 12697-24, EN 13286-47, AASHTO T193, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297, ASTM D6927

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (l x w x h)	550 x 400 x 1470 mm
Max vertical clearance	800 mm
Horizontal clearance	265 mm
Platen diameter	133 mm
Platen travel	100 mm
Platen speed range	0.5 to 50.8 mm/min
Rapid approach speed	40 mm/min
Weight kg	100, (shipping 113 kg)

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



50kN S-type Load Cell

Code: [27-1559](#)



Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

Code: [24-9188](#)



Cbr Penetration Piston (Adjustable).

Code: [24-9183](#)



CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1705](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Penetration Dial Gauge BS

Code: [24-9186](#)



Penetration Piston

Code: [24-9182](#)



Penetration/Swell Dial Gauge ASTM.

Code: [24-9184](#)

Alternatives



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/01](#)



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/06](#)



Digital Tritest 50 Load Frame

Code: [25-3518/01](#)



Buoyancy Balance

Code: [34-8100/09](#)

Product Group: [Percentage Refusal Density \(PRD\)](#),
[Hardened Concrete - Buoyancy Balance](#)

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Cradle

Code: [34-8105](#)



Cradle

Code: [34-8105](#)

Product Group: [ELE Bouyancy Balance, Hardened Concrete - Buoyancy Balance, Percentage Refusal Density \(PRD\)](#)

Standards

EN 12697-32, EN 13280-4, BS 598-104, EN 1097-6

Accessories



Vibrating Hammer

Code: [47-0455/01](#)

Alternatives



Vibrating Hammer

Code: [47-0455/01](#)



Wire Basket Brass with Handle Nominal 6000Cm³ Capacity with 1.7mm Wire Mesh.

Code: 42-1005

Product Group: Particle Density (specific gravity) and
Water Absorption for Coarse Aggregates

For BS 812 Relative Density. 200 mm diameter x 190
mm deep, 1.70 mm wire mesh.

Standards

EN 1097-6, EN 12697-6, BS 812, ASTM C127, AASHTO T85

Further Information

NOT AVAILABLE FOR SALE IN THE USA



Buoyancy Balance 6Kg X 0.1G. Supplied with Support Frame Water Tank & Suspension Hook.

Code: [42-1000/01](#)

Product Group: [Particle Density \(specific gravity\) and Water Absorption for Coarse Aggregates](#)

The buoyancy balance system developed by ELE consists of a rigid support frame, incorporating a water tank mounted on a platform. A mechanical lifting device is used to raise the water tank through the frame height immersing the specimen suspended below the balance. The balance supplied may also be used as a standard weighing device, thus providing a versatile and comprehensive weighing system in the laboratory. 6000 g x 0.1 g supplied with frame, water tank and suspension hook.

Standards

EN 1097-6, EN 12697-6, BS 812, ASTM C127, AASHTO T85

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

For 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Accessories



200 mm Diameter Lid

Code: [79-0010](#)



200 mm Diameter Receiver

Code: [79-0020](#)



200mm Dia BS Sieve 31.5mm Perforated Plate.

Code: [79-1630](#)



200mm Dia BS Sieve 4.00mm Stainless Steel Mesh.

Code: [79-0310](#)



200mm Dia BS Sieve 63 Mic Stainless Steel Mesh.

Code: [79-0070](#)



200mm Dia BS Sieve 63.0mm Perforated Plate.

Code: [79-1670](#)



Digital Pocket Thermometer

Code: [82-5420](#)



Sample Container - Tinned Steel 10 litres

Code: [81-3060](#)



Sample Tray - 406 x 406 x 50 mm

Code: [81-4030](#)



Timer Clock

Code: [81-0518](#)



Wire Basket Brass with Handle Nominal 6000Cm³ Capacity with 1.7mm Wire Mesh.

Code: [42-1005](#)



Set of Flakiness Sieves Comprising 1 Ea 4.9mm 7.2mm 10.2mm 14.4mm 19.7mm 26.3mm and 33.9mm

Code: [42-0600](#)

Product Group: [Flakiness Sieves and Gauges](#)

Comprising of 1 each, 4.9 mm, 7.2 mm, 10.2 mm,
14.4 mm, 19.7 mm, 26.3 mm and 33.9 mm.

Standards

BS 813

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Alternatives



Length Gauge

Code: [42-0820](#)



Flakiness Gauge.

Code: [42-0410](#)

Product Group: [Flakiness Sieves and Gauges](#)

Constructed of heavy gauge sheet steel to the dimensions specified in BS 812.

Standards

BS 812

Further Information


****NOT AVAILABLE FOR SALE IN THE USA****

Alternatives



Length Gauge

Code: [42-0820](#)

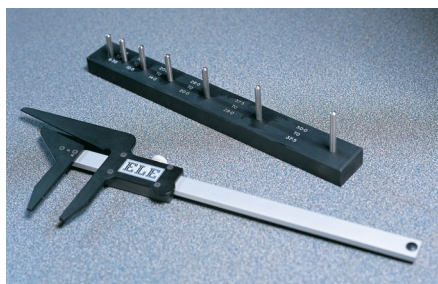

Length Gauge

Code: [42-0820](#)

Product Group: [Elongation Index](#)

Manufactured to the dimensions specified in BS 182.

Standards

BS 812-105

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



300mm Dia BS Sieve 10.0mm Perforated Plate.

Code: [79-2555](#)



300mm Dia BS Sieve 14.0mm Perforated Plate.

Code: [79-2575](#)



300mm Dia BS Sieve 20.0mm Perforated Plate.

Code: [79-2595](#)



300mm Dia BS Sieve 28.0mm Perforated Plate.

Code: [79-2615](#)



300mm Dia BS Sieve 37.5mm Perforated Plate.

Code: [79-2640](#)



300mm Dia BS Sieve 45.0mm Perforated Plate

Code: [79-2650](#)



300mm Dia BS Sieve 5.60mm Perforated Plate.

Code: [79-2520](#)



300mm Dia BS Sieve 50.0mm Perforated Plate.

Code: [79-2655](#)



300mm Dia BS Sieve 6.30mm Perforated Plate.

Code: [79-2525](#)



300mm Dia BS Sieve 63.0mm Perforated Plate.

Code: [79-2670](#)



300mm Dia Lid.

Code: 79-2010



300mm Dia Receiver.

Code: 79-2020



ELE Sieve Shaker

Code: 80-0200/01



ELE Sieve Shaker

Code: 80-0200/06



Sample Tray - 1200 x 1160 x 50 mm

Code: 81-4230



Sample Tray - 406 x 406 x 50 mm

Code: 81-4030



Shovel - With flat blade

Code: 81-0240

Alternatives



Flakiness Gauge.

Code: 42-0410



Set of Flakiness Sieves Comprising 1 Ea 4.9mm 7.2mm 10.2mm 14.4mm 19.7mm 26.3mm and 33.9mm

Code: 42-0600



ADR Touch 1500 Compression Machine with Digital Readout.

Code: 36-0720/01

Product Group: General Purpose Compression Machines

- 1560 kN/350 000 lbf capacity
- Calibration accuracy to BS EN ISO 7500-1; ASTM E4;
- Efficient hydraulic power packs
- Economic machines ideal for site use

The Compact 1500 range of compression machines has been designed to meet the need for a simple, economic and reliable means of testing concrete.

SPECIMEN CAPACITY

The dimensions of the frame allow the testing of cylinders up to 320 mm long x 160 mm diameter, and cubes 150 or 100 mm square. Kerbs and flagstones may also be tested on the ADR machine as well as 150 mm and 100 mm square section beams to ASTM C78, using the optional 100 kN flexural frames which are connected to the power pack.

LOAD INDICATION

The ADR digital readout is a microprocessor controlled instrument, which is fitted as standard to all digital machines in the range. Load can be displayed in kN, lbf or kgf as selected by the operator.

Standards

BS EN ISO 7500-1, ASTM E4

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

The Standard range of compression machines has been designed to meet the need for a simple, economic and reliable means of testing concrete.

Whilst delivering all the features and reputation of the established ADR Series with its extensive design history, the new and improved user interface provides a high quality platform for testing that enhances the performance of ELE's compression machines.

New, sophisticated electronics further the benefits of simplified operation, whilst delivering the highest levels of accuracy in testing concrete and cement/mortar samples, satisfying the needs of Quality Control Managers, Lab Managers and Technicians.

ACCURACY & SAVINGS

The new ADR Touch Series, with 145mm (5.7") high resolution QVGA touch screen interface and intuitive menu-driven operation, reduces the time taken to set up the machine and perform tests, reducing the time to train staff by up to 25%.

- Up to 6 sample types can be set as favorites, enabling one-touch set up for repeat testing.

- Full, QWERTY touch pad for input of test data.

Most testing errors produce lower strength results. Noncompliant loading rates can generate errors in measured strength. The user interface includes real-time display of load vs. time, further ensuring accurate and consistent test results and providing "goodness of test" data to improve traceability in your QC operations.

TRACEABILITY & DATA QUALITY

The ADR range now provides improved data quality and traceability in due diligence cases - it is now possible to demonstrate traceability all the way from the machine/user to the accreditation body, increasing your reputation and peace of mind - all test results now come complete with the machine serial number attached.

- Enhanced USB data communications between PC and machine - eliminating the need for download software.
- Two gigabytes of storage memory.
- Full customization of sample sizes - stress calculations are automatically recalculated.

USER SAFETY

With full safety gates as standard, total systems diagnostics, ram run-out switches and overload warnings ensure the safety of your employees and the reliability of your machine.

Specification

Testing Standards	BS EN ISO 7500-1, ASTM E4
Capacity	1500 kN
Cubes (Concrete)	Up to 150 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	n/a
Flexural Testing	Via Flexural Frame
TFV and ACV	Yes
Voltage Supply	220-240V 50/60 Hz 1Ph.
Frame Type	Welded
Max vert. Clearance	340 mm
Max hor. Clearance	325 mm
Platen Sizes	Lower, Upper 222 mm
Max Ram Travel	50 mm

Accessories



100kN Flexural Fitting Kit (ADR) Used for Connecting Flexural Frames to ADR Compression Machines.

Code: [37-6138](#)



2000 kN Capacity Calibration Load Cell with Hand-Held Readout

Code: [37-8315](#)




ADR Touch Head for Compression machines

Code: [37-4950/09](#)



Impact Printer Rs232 Serial Connection. Supplied Complete with 1 Paper Roll.

Code: [37-4859/01](#)



Standard Distance Piece - 100 mm Depth

Code: [37-5100](#)



Standard Distance Piece - 20 mm Depth

Code: [37-4980](#)



Standard Distance Piece - 50 mm Depth

Code: [37-5000](#)



Standard Distance Piece - 60 mm Depth

Code: [37-5020](#)



Standard Distance Piece - 80 mm Depth

Code: [37-5050](#)

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output

Code: [6014A0062](#)

Alternatives



ADR Touch 2000 Standard Compression Machine with Digital Readout.

Code: [36-3090/01](#)



Standard Distance Piece - 20 mm Depth

Code: [37-4980](#)

Product Group: [Distance Pieces](#)

Further Information

****Not available for sale in the USA****



Standard Distance Piece - 50 mm Depth

Code: [37-5000](#)

Product Group: [Distance Pieces](#)

Further Information

****Not available for sale in the USA****



Standard Distance Piece - 60 mm Depth

Code: [37-5020](#)

Product Group: [Distance Pieces](#)

Further Information

****Not available for sale in the USA****



Standard Distance Piece - 80 mm Depth

Code: [37-5050](#)

Product Group: [Distance Pieces](#)

Further Information

****Not available for sale in the USA****



150mm Aggregate Crushing Value Apparatus. Supplied Complete with Metal Measure and Tamping Rod.

Code: 42-4300

Product Group: [Aggregate Crushing Value \(ACV\) and Ten Percent Fines Value \(TFV\)](#)

Comprising of 150 mm nominal diameter steel cylinder, plunger and base plate supplied complete with metal measure and tamping rod.

Standards

BS 812-112

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Tamping Rod 16mm Dia X 600mm long hemispherical at both ends.

Code: 34-0130

Alternatives



75mm Aggregate Crushing Value Apparatus. Supplied Complete with Metal Measure and Tamping Rod.

Code: 42-4500



75mm Aggregate Crushing Value Apparatus. Supplied Complete with Metal Measure and Tamping Rod.

Code: [42-4500](#)

Product Group: [Aggregate Crushing Value \(ACV\) and Ten Percent Fines Value \(TFV\)](#)

Comprising of 75 mm nominal diameter steel cylinder, plunger and base plate supplied complete with metal measure and tamping rod.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Tamping Rod 8mm Dia X 300mm.

Code: [42-4580](#)

Alternatives



150mm Aggregate Crushing Value Apparatus. Supplied Complete with Metal Measure and Tamping Rod.

Code: [42-4300](#)



Tamping Rod 8mm Dia X 300mm.

Code: 42-4580

Product Group: Aggregate Crushing Value (ACV) and
Ten Percent Fines Value (TFV)

Spare: 8mm diameter x 300mm long with rounded
end.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Rubber Mallet

Code: [88-7940](#)

Product Group: [Rubber Mallet](#)

Specification

Head	Rubber; 2â€ (50.8 mm).
Handle	Hardwood; 10â€ (254 mm) long.
Weight	Net 1 lb. 6 oz. (616 g).



Slump Cone

Code: [34-0110](#)

Product Group: [Slump Cones, Slump Test](#)

Complies with EN 12350-2, ASTM C143 and AASHTO T119

Standards

ASTM C143, ASTM C192, AASHTO T23, AASHTO T119, ASTM T126

Specification

Construction	Seamless, heavy-gauge spun steel; 0.45" (1.1 mm) min. Thickness.
Finish	Plated for rust and corrosion resistance.
Dimensions	100 mm top diam. X 200 mm bottom diam. (without foot pieces) x 300 mm h.
Weights	Net 5.5 lbs (2.5kg)

Accessories



300 mm Stainless Steel Rule.

Code: [34-0140](#)



Aluminium Scoop Large

Code: [81-0220](#)



Base Plate for Slump Test.

Code: [34-0160](#)



Cement Pan

Code: [34-0152](#)



Graduated Tamping Rod

Code: [34-0132](#)




Sample Tray - 1200 x 1160 x 50 mm

Code: [81-4230](#)



Shovel - With flat blade

Code: [81-0240](#)



Slump Cone Base

Code: [34-0150](#)



Slump Cone Funnel

Code: [34-0180](#)



Tamping Rod 16mm Dia X 600mm long hemispherical at both ends.

Code: [34-0130](#)

Spares/Consumables



Stopwatch

Code: [81-0521](#)

Alternatives



Metal Slump Cone - English

Code: [34-0108](#)



Tamping Rod 16mm Dia X 600mm long hemispherical at both ends.

Code: [34-0130](#)

Product Group: [Precision Air Entrainment Meter, Slump Test, Accessories for Concrete Moulds](#)

Steel, 600 mm long x 16 mm dia, hemispherical at both ends

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



300 mm Stainless Steel Rule.

Code: [34-0140](#)

Product Group: [Slump Test](#)

Standards

EN 12350-2

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Base Plate for Slump Test.

Code: [34-0160](#)

Product Group: [Slump Test](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****