



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 01/02/2017, and contains the following Products:

25-1833/01

De-Aired Water Apparatus 15 Litre Capacity

25-3518/01

Digital Tritest 50 Load Frame

25-4047

50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

25-4166

38mm/1.5 Inch Base Adaptor for 50mm Cells.

25-4200

Piston Restraint Clamp for Ele Triaxial Cells

25-4290

Membrane Placing Tool 35mm/38mm.

25-4520

Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.

25-5050

Pressure Pad 38mm/1.5 Inch Diameter.

25-5061

Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.

25-5081

Membrane Sealing Ring 38mm/1.5 Inch Diameter. Pack of 10.

25-5100

Suction Membrane Device 38mm/1.5 Inch Diameter.

25-5120

Two-Way Split Former 38mm/1.5 Inch Diameter.

25-5181

Porous Disc 38mm/1.5 inch Diameter. Pack of 2.

25-5200

Filter Paper Drain 38mm/1.5 inch Diameter. Pack of 50.

26-1746

Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

26-1769

Nylon Tubing 30 Metre Length.

26-1872

Six-Way Pneumatic Pressure Control Panel.

26-1880

Universal Pump and Pressure Indicating Panel 1700Kpa.

26-1926

Nylon Tubing 6mm Od 3500Kpa.

27-1293

Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

27-1500/01

GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

27-1573

Submersible Load Transducer Assembly 5kN Capacity In Compression.

27-1617

Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

27-1633

Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin DIN Plug.

27-1641

Volume Change Transducer Assembly 80ml Capacity Maximum Working Pressure 1700KPa

27-1753

DS7.2 Undrained Triaxial Shear Strength Program for Windows 7, 32/64 bit

27-1763

DS7.2 CU/CD Triaxial Shear Strength Program for Windows 7, 32/64 bit

83-1730/01

Air Compressor

26-1928

6mm Elbow Connector.

26-1930

6mm T Connector.

25-4168

50mm Base Adapter for 50mm Cells.

25-5430

Pressure Pad 50mm Diameter.

25-5441

Rubber Membrane 50mm Diameter Pack of 10.

25-5461

Membrane Sealing Ring 50mm Diameter Pack of 10.

25-5470

Membrane Placing Tool 50mm Diameter.

25-5480

Suction Membrane Device 50mm Diameter.

25-5500

Two-Way Split Former 50mm Diameter.

25-5561

Porous Disc 50mm Pack of 2

25-5580

Filter Paper Drain 50mm Diameter. Pack of 50

25-4117

70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

25-4176

70mm Base Adaptor for 70mm Cells.

25-6430

Pressure Pad 70mm Diameter.

25-6441

Rubber Membrane 70mm/2.8 Inch Diameter. Pack of 10.

25-6461

Membrane Sealing Ring 70mm Diameter Pack of 10.

25-6470

Membrane Placing Tool 70mm/2.8 Inch Diameter.

De-Aired Water Apparatus 15 Litre Capacity

Code: [25-1833/01](#)

Product Group: [De-Aired Water](#)



This compact self-contained unit will de-air water quickly and efficiently down to levels of dissolved oxygen acceptable for geotechnical test methods. Air is removed from the water by a vacuum system, which continuously circulates the water in the tank. The unit is supplied with a clear water container, which will hold a maximum of 15 litres of water. Input and output lines are formed using standard 6 mm tube connectors.

Standards

BS 1377-1

Specification

Dimension

380 x 356 x 470 mm (l x w x h).



Digital Tritest 50 Load Frame

Code: [25-3518/01](#)

Product Group: [Digital Tritest 50 Load Frame](#), [CBR Load Frames](#), [Triaxial Load Frames](#)

- Microprocessor control
- Large on-board LED screen display
- Direct entry via a touch sensitive keyboard
- Rapid approach and return to datum of platen
- Fully variable speed, 0.00001 to 9.99999 mm/min
- Samples up to 100 mm diameter

This 50 kN capacity machine, designed primarily for triaxial testing of soil specimens up to 100 mm diameter x 200 mm long, comprises a rigid twin column construction with an integral fully variable microprocessor controlled drive unit and LCD display with a touch sensitive keyboard. The machine is normally bench mounted for ease of installation and operation.

The use of a microprocessor controlled drive system and keyboard entry provides the Digital Tritest 50 with a wide variety of features which include pause and speed reset during test, RS 232C, operator programming of speed and control functions, self test diagnostics and many other features.

A robustly constructed steel case houses the motor drive system with careful attention being given to the prevention of ingress of water or grit. All operating controls are mounted on the front panel of the machine, which is angled and recessed to prevent physical and environmental damage.

Standards

BS 1377-7, BS 1377-8, BS 1924-2, ASTM D1883, ASTM D2166, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180, AASHTO T193, AASHTO T208, AASHTO T296, AASHTO T297

Further Information

Complete with RS 232C interface.

Specification

Capacity	50kN (11,200 lbf).
Speed Range	English mode: 0.000001 to 0.399999 in/min. Metric mode: 0.00001 to 9.99999 mm/min.
Rapid Approach Speed	1.0 in/min. (25 mm/min.).

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Platen Travel	100mm (3.9"); limit switch protection.
Platen Diameter	133 mm (5.2")
Vertical Clearance	910 mm, (36 .8") maximum; 305mm, (12") minimum.
Horizontal Clearance	364mm, (15 .3").
Serial Interface	RS232C; programmable baud rate and protocol.
Overall Dimensions	500 x 500 x 1,470 mm, (19.7" w. x 19.7" d. x 57.8" h).
Weight	Net 100kg (220 lbs); Shpg. 136kg (300 lbs).

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Adaptor kit, to perform CBR on the Tritest 50 load frame

Code: [25-3518/10](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)

Alternatives



MultiPlex 50 Load Frame

Code: [25-3700/01](#)



Versa-Loader

Code: [25-3525/02](#)



50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4047](#)

Product Group: [Triaxial Cell](#), [Triaxial Cells](#)

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

Specification

Cell size	50 mm
Max specimen size	50 x 100 mm
Working pressure	1700 kPa
Max piston load	45 kN
Vertical clearance required	380 mm
Horizontal clearance required	155 mm
Weight kg	4

Accessories



38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)

Alternatives



100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4157](#)



70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4117](#)



38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)

Product Group: [Specimen Base Adaptors, Base Pedestals](#)

38mm/1.5 Inch Base Adaptor with Twin Pore Pressure Ports for 50mm Cells.

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

Accessories



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

Alternatives



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)



Piston Restraint Clamp for Ele Triaxial Cells

Code: [25-4200](#)

Product Group: [Aggressive Materials, General Cell Accessories](#)

For ELE Triaxial Cells Manufactured From July 1996.

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

Further Information

To lock the loading piston into position



Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

Membrane Placing Tool For 35Mm/1.4 Inch And 38Mm/1.5 Inch Samples.

Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

Accessories



Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)

Alternatives



Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)



Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.

Code: [25-4520](#)

Product Group: [Accessories for CU/CU effective stress, General Cell Accessories](#)

Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297



Pressure Pad 38mm/1.5 Inch Diameter.

Code: [25-5050](#)

Product Group: [Pressure Pads](#)

38 mm / 1.5 Inch diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.

Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297



Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.

Code: [25-5061](#)

Product Group: [Rubber Membranes](#)

Rubber Membrane For 38Mm/1.5 Inch Samples
(Pack Of 10).

Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



Membrane Sealing Ring 38mm/1.5 Inch Diameter. Pack of 10.

Code: [25-5081](#)

Product Group: [Membrane Sealing Rings](#)

Membrane Sealing Ring 38Mm Diameter (Pack Of 10).

Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084



Suction Membrane Device 38mm/1.5 Inch Diameter.

Code: [25-5100](#)

Product Group: [Suction Membrane Devices, Suction Membrane Device](#)

Suction Membrane Device For 38Mm/1.5 Inch Samples.




Two-Way Split Former 38mm/1.5 Inch Diameter.

Code: [25-5120](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

Two-Way Split Former For 38Mm/1.5 Inch Samples.

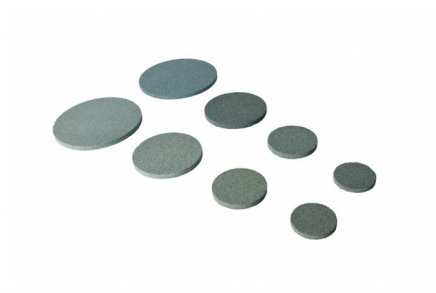

Porous Disc 38mm/1.5 inch Diameter. Pack of 2.

Code: [25-5181](#)

Product Group: [Accessories for CU/CU effective stress, Porous Stones](#)

Porous disc for 38 mm/1.5 inch samples (Pack of 2).



Filter Paper Drain 38mm/1.5 inch Diameter. Pack of 50.

Code: [25-5200](#)

Product Group: [Accessories for CU/CU effective stress, Filter Paper Drains](#)

Filter paper drain 38 mm diameter (Pack of 50).



Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

Code: 26-1746

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

With transparent plastic chamber for operating continuously at pressures up to 1000 kPa. A length of tubing is provided for connecting the air/water cylinder outlet to a pressure measuring system.

- Used to supply hydraulic pressure from a pneumatic pressure source.
- Prevents air entering the hydraulic pressure system.
- Maximum working pressure 1000kpa.
- Supplied with connectors and tubing for fitting to pressure measuring systems.

Accessories



Nylon Tubing 30 Metre Length.

Code: 26-1769

Spares/Consumables



Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.

Code: 26-1760



Replacement Bladder Wide Neck (38mm Id)

Code: 26-1746/10



Nylon Tubing 30 Metre Length.


Code: [26-1769](#)

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

30 metre length. For pressures up to 1700 kPa. Used for connecting Air Compressors to Pneumatic Pressure Reducing Panels, or for connecting two Pressure Reducing Panels together.

Further Information

Nylon tubing 30 metres with pressure fittings.

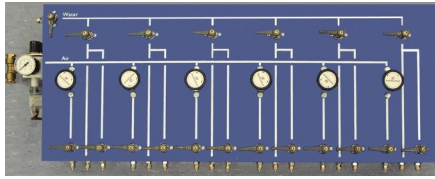


Six-Way Pneumatic Pressure Control Panel.

Code: 26-1872

Product Group: Air/Water Pressure Systems - up to 1000 kPa

The six-way pressure control systems have been designed specifically for the monitoring of up to six independent pressures. They are particularly useful for setting up and controlling a 3-cell effective stress system using three independent back pressures. The panel is used in conjunction with the Universal Pump and Pressure Indicating Panel which provides pressure monitoring and facilities for filling and de-airing the system. Comprising six pneumatic control valves mounted in a housing for controlling six independent outlets. Supplied with connection ports for coupling panel to EL26-1880. Maximum inlet pressure 1400 kPa maximum outlet pressure 1000 kPa.

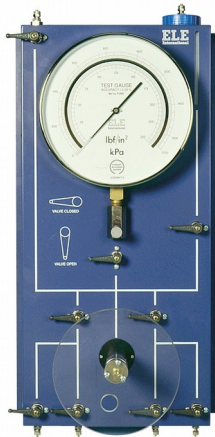

Universal Pump and Pressure Indicating Panel 1700Kpa.

Code: [26-1880](#)

Product Group: [Modular Pressure Panel System](#)

This is the main pressure display in the system for monitoring various pressures and also provides fine control of the pressure within the system using the rotary hand pump. The unit is fitted with a dual calibrated 250 mm diameter pressure gauge, four inlet/outlet no-volume change valves, screw controlled rotary hand pump, water reservoir and isolating valves. The unit is housed in a hinged case for wall or bench mounting. By using an isolating valve the panel may be used to monitor cell or back pressure. 1700 kPa and 250 lbf/in².

Spares/Consumables



Pressure Gauge 1700Kpa (250Psi) 250mm Diameter.

Code: [26-1865/10](#)



Nylon Tubing 6mm Od 3500Kpa.

Code: [26-1926](#)

Product Group: [Permeability of Rock, Volume Change Measurement](#)

6 mm outside diameter x 4 mm inside diameter. For use up to a pressure of 3500 kPa. Priced per metre.



Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)

Product Group: [Submersible Load Transducers, Load Measurement, Load Measurement](#)

Required when using submersible load cells.

Accessories



Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)



Submersible Load Transducer Assembly 5kN Capacity In Compression.

Code: [27-1573](#)

Alternatives



Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)



Submersible Load Transducer Assembly 5kN Capacity In Compression.

Code: [27-1573](#)



GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

Code: 27-1500/01

Product Group: Data Logging with the GDU, Geotechnical Data Acquisition Unit (GDU), Automatic Data Acquisition - CBR, Automatic Data Acquisition - Triaxial, Automatic Data Acquisition - Consolidation, Automatic Data Acquisition - Direct Shear

The GDU is a stand-alone, multi-tasking, multi-channel data logger, that is reliable and powerful, enabling it to co-ordinate test data from the range of ELE transducers required for various test methods.

The ELE Geotechnical Software package (DS7.1), in conjunction with the GDU and a range of transducers, are the two central components required to create a modern turnkey soil testing system. Being fully modular it can be adapted to a wide range of soil testing laboratory configurations.

- For performing CBR, Consolidation, Direct/Residual Shear and Total & Effective Stress Triaxial tests
- 8 Channels expandable to 32 for performing multiple, concurrent tests for cost savings
- Independent signal conditioning on each channel to maintain data accuracy
- Field-upgradeable software, meaning no downtime for future software and functionality upgrades
- Extended warranty.

Specification

Case	Aluminum, free standing; houses power supply, analog to digital conversion module and an 8-channel analog input module with transducer energization.
Sockets	Standard 5-pin DIN type.
Input Range	± 5 volts to ± 10 mV full scale.
Transducer Supply	10vDC.
Dimensions	12.8" w. x 14.3" d. x 6.1" h. (325 x 363 x 155 mm).
Weight	Net 14.08 lbs. (6.4 kg).

Accessories



8-Channel Expansion Analog Input Module

Code: [27-1505](#)



USB to Serial Adapter

Code: [27-1701](#)

Alternatives



GDU 8 Channel Data Acquisition Unit 100-120 V 60 Hz

Code: [27-1500/02](#)



Submersible Load Transducer Assembly 5kN Capacity In Compression.

Code: [27-1573](#)

Product Group: [Load Measurement, Load Measurement, Submersible Load Transducers](#)

- Eliminates effects of piston friction on readings
- Unaffected by cell confining pressures
- Easily installed in triaxial cell
- Supplied complete with calibration certificate and 5-pin DIN type connector for use with GDU

Submersible Load Transducers are used to measure accurately the axial loads applied to triaxial test specimens. Consisting of a load cell and piston assembly these units replace the standard triaxial cell loading piston. A major advantage is that these transducers measure loads directly on top of the specimen. All transducers are supplied complete with a 5-pin DIN type connector and calibration certificate.

Specification

Dimensions	75 x 50 mm (dia x h) excluding piston and adaptor
Overload capacity	150%
Output	26 mv full range
Excitation	10 V DC (15 V DC max)
Non-linearity	0.1% maximum
Hysteresis Deflection	0.1% maximum 0.05 mm at full load
Side force	50% full scale maximum without effect
Connector	5-pin DIN plug
Compensated temperature range	0 to 50°C
Weight g	850

Accessories



Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)



Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)

Alternatives



Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)



Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)



Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1617](#)

Product Group: [Axial Displacement](#), [Axial Displacement](#), [Displacement Transducers](#)

0 to 50 mm range. For use with Triaxial Cells.

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	10V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45

Accessories



Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)

Spares/Consumables



CBR Displacement Transducer

Code: [27-1706](#)

Alternatives



Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)



Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin DIN Plug.


Code: [27-1633](#)

Product Group: [Pressure Measurement, Tri-Flex 2
One-Cell Permeability Test System, Pressure
Transducer](#)

Pressure Transducers are used to measure the cell, pore and back pressures during triaxial testing. Assemblies are supplied complete with a de-airing block, valve, 5-pin DIN plug connector and calibration certificate

Specification

Construction	Stainless Steel
Excitation	10 V DC
Output	143 mV full range
Thread	1/4" BSP

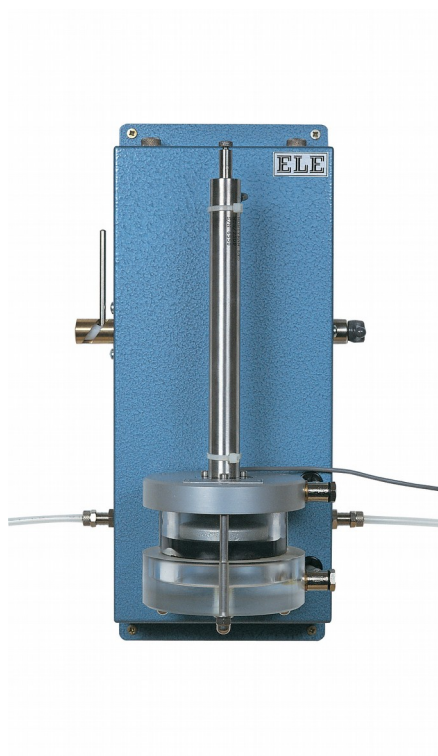

Volume Change Transducer Assembly 80ml Capacity Maximum Working Pressure 1700KPa

Code: 27-1641

Product Group: [Volume Change Measurement](#),
[Tri-Flex 2 One-Cell Permeability Test System](#), [Volume Change Measurement](#), [Volume Change Transducer](#)

- Reversing valves to increase capacity
- Steel case for wall mounting and access to piping
- Supplied complete with calibration certificate

The Volume Change Transducer provides continuous measurements of volume change during the triaxial test. The assembly includes a valve to reverse the flow through the unit, providing increased capacity.

Specification

Maximum Pressure	250 psi (1,700 kPa).
Excitation	10V DC.
Output	1.25 Volts full range.
Capacity	80 cc x 0.1 cc sensitivity.
Case	Steel; hinged for access to piping.
Connector	5-Pin DIN type.
Overall Dimensions	9" w. x 7" d. x 14 -1/2" h. (229 x 178 x 368 mm).
Weight	Net 11 lbs. (5 kg).



DS7.2 Undrained Triaxial Shear Strength Program for Windows 7, 32/64 bit

Code: [27-1753](#)

Product Group: [DS7](#), [DS7.2 Quick Undrained Triaxial Software](#), [Automatic Data Acquisition - Triaxial](#)

- Options for single or multi-stage testing on a sample
- Mohr circles produced for graphical analysis

Options are available for a single test on one sample, standard three-sample procedure with linking of the results, or for a multi-stage test on one sample. Load and strain are monitored through transducers. Various printouts and graphical plots are available including basic sample data, moisture content and density. The program tabulates shearing data and plots stress against strain. Mohr circles are produced for graphical analyses.



DS7.2 CU/CD Triaxial Shear Strength Program for Windows 7, 32/64 bit

Code: [27-1763](#)

Product Group: [DS7, DS7.2 CU/CD Effective Stress Triaxial Software](#)

- Complete package for consolidated drained and consolidated undrained triaxial tests

This advanced package includes procedures for consolidated drained and consolidated undrained tests. Standard options are available for saturation, consolidation and shearing with automatic monitoring of the various parameters through transducers linked to the system. Load, strain, volume-change, pore-pressure, cell pressure and back pressure can all be monitored. Various prints and graphical plots are available to the engineer and include saturation data such as pore pressure build-up and B values, consolidation, volume change against time, shearing load versus strain with pore pressure monitoring.



Air Compressor

Code: 83-1730/01

Product Group: Air Compressors, Air/Water Pressure Systems - up to 1000 kPa

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (l x w x h)	483 x 457 x 864 mm
Free air delivery	2.0 cfm
Receiver capacity	50 litres
Maximum pressure	1000 kPa
Continuous working pressure	700 kPa
Electrical supply	220 – 240 V AC 1 ph 50 Hz
Water Trap	No
Weight	57 kg



6mm Elbow Connector.

Code: [26-1928](#)

Product Group: [Volume Change Measurement](#)



6mm T Connector.

Code: [26-1930](#)

Product Group: [Volume Change Measurement](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)

Product Group: [Base Pedestals, Specimen Base Adaptors](#)

50mm Base Adapter with Twin Pore Pressure Ports for 50mm Cells.

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

Accessories



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

Alternatives



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

Pressure Pad 50mm Diameter.

Code: [25-5430](#)

Product Group: [Specimen Caps, Pressure Pads](#)

50 mm diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



Rubber Membrane 50mm Diameter Pack of 10.

Code: [25-5441](#)

Product Group: [Rubber Membranes](#)

50 mm diameter rubber membrane (Pack Of 10).

Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



Membrane Sealing Ring 50mm Diameter Pack of 10.

Code: [25-5461](#)

Product Group: [Membrane Sealing Rings, Sealing Rings](#)

50 mm diameter membrane sealing ring (Pack Of 10).

Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084



Membrane Placing Tool 50mm Diameter.

Code: [25-5470](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

50 mm Diameter Membrane Placing Tool.

Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



Suction Membrane Device 50mm Diameter.

Code: [25-5480](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

50 mm Diameter Suction Membrane Device.



Two-Way Split Former 50mm Diameter.

Code: [25-5500](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

50 mm Diameter Two-Way Split Former.



Porous Disc 50mm Pack of 2

Code: [25-5561](#)

Product Group: [Accessories for CU/CU effective stress](#), [Porous Stones](#)

50 mm diameter porous disc (Pack Of 2).



Filter Paper Drain 50mm Diameter. Pack of 50

Code: [25-5580](#)

Product Group: [Accessories for CU/CU effective stress, Filter Paper Drains](#)

Filter paper drain 50 mm diameter (Pack of 50).



70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4117](#)

Product Group: [Triaxial Cell](#), [Triaxial Cells](#)

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

Standards

BS 1377, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297

Specification

Cell size	70 mm
Max specimen size	70 x 140 mm
Working pressure	1701 kPa
Max piston load	46 kN
Vertical clearance required	430 mm
Horizontal clearance required	180 mm
Weight kg	7.3
Maximum Working Pressure	25 0 psi (1,700 kPa).
Maximum Piston Load	10,100 lbf. (45 kN).

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Maximum Specimen Size	2.8" (70 mm) diam. x 5.6" (140 mm) l.
Required Clearance	17" (430 mm) vertical; 7.1" (180 mm) horizontal.
Weights	Net 16 lbs. (7.3 kg).

Accessories



1.4" Base Pedestal

Code: [25-4170](#)



1.4" Specimen Cap

Code: [25-4250](#)



2.8" Base Pedestal

Code: [25-4178](#)



2.8" Specimen Cap

Code: [25-6630](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)




70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)



Digital Pressure Gauge 1700Kpa. for Ele Triaxial Cells.

Code: [27-1620](#)



Drainage Line for 25-4250

Code: [25-5050/10](#)



Drainage Line for 25-6430

Code: [25-6430/10](#)



High Vacuum Grease

Code: 88-3115



Piston Restraint Clamp for Ele Triaxial Cells

Code: 25-4200



Pressure Pad 70mm Diameter.

Code: 25-6430



Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.

Code: 25-4520

Alternatives



100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: 25-4157



4" Triaxial Cell

Code: [25-4159](#)



50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4047](#)



70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

Product Group: [Base Pedestals, Specimen Base Adaptors](#)

70mm Base Adaptor with Twin Pore Pressure Ports for 70mm Cells.

Standards

BS 1377, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297

Accessories



1.4" Base Pedestal

Code: [25-4170](#)



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



2.8" Base Pedestal

Code: [25-4178](#)



38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)

Alternatives



1.4" Base Pedestal

Code: [25-4170](#)



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



2.8" Base Pedestal

Code: [25-4178](#)



38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)

Pressure Pad 70mm Diameter.

Code: [25-6430](#)

Product Group: [Specimen Caps, Pressure Pads](#)

70 mm / 2.8" diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

Accessories



1.4" Specimen Cap

Code: [25-4250](#)



2.8" Specimen Cap


Code: [25-6630](#)



Drainage Line for 25-6430

Code: [25-6430/10](#)

Alternatives



1.4" Specimen Cap

Code: [25-4250](#)



2.8" Specimen Cap

Code: [25-6630](#)



Drainage Line for 25-6430

Code: [25-6430/10](#)



Rubber Membrane 70mm/2.8 Inch Diameter. Pack of 10.

Code: [25-6441](#)

Product Group: [Rubber Membranes, Rubber Membranes, Tri-Flex 2 One-Cell Permeability Test System, Tri-Flex 2 Permeability Test Cell](#)

70 mm / 2.8" mm diameter rubber membrane (Pack Of 10).

Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

Accessories



1.4" (35 mm) Rubber Membranes

Code: [25-4261](#)



Rubber Membrane 100mm/4 Inch Diameter. Pack of 10

Code: [25-7621](#)

Alternatives



1.4" (35 mm) Rubber Membranes

Code: [25-4261](#)



Rubber Membrane 100mm/4 Inch Diameter. Pack of 10

Code: [25-7621](#)



Membrane Sealing Ring 70mm Diameter Pack of 10.

Code: [25-6461](#)

Product Group: [Membrane Sealing Rings, Sealing Rings, Tri-Flex 2 Permeability Test Cell](#)

70 mm diameter membrane sealing ring (Pack Of 10).

Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297

Accessories



1.4" (35 mm) Sealing Rings

Code: [25-4281](#)



Membrane Sealing Ring 100mm Diameter. Pack of 10.

Code: [25-7631](#)



Membrane Sealing Rings 2.8"

Code: [25-6641](#)

Alternatives



1.4" (35 mm) Sealing Rings

Code: [25-4281](#)



Membrane Sealing Ring 100mm Diameter. Pack of 10.

Code: [25-7631](#)



Membrane Sealing Rings 2.8"

Code: [25-6641](#)



Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)

Product Group: [Membrane Placing Tools](#), [O-Ring Placing Tools](#), [Tri-Flex 2 One-Cell Permeability Test System](#)

70Mm/2.8 Inch Diameter Membrane Placing Tool.

Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181

Accessories



Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)

Alternatives



Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)