



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 01/02/2017, and contains the following Products:

---

27-1573

**Submersible Load Transducer Assembly 5kN Capacity In Compression.**

---

25-4200

**Piston Restraint Clamp for Ele Triaxial Cells**

---

26-1892

**Twin Burette Volume Change Unit.**

---

82-0120

**Beaker - 100 ml**

---

82-0140

**Beaker - 250 ml**

---

82-0200

**Beaker - 600 ml**

---

80-0200/01

**ELE Sieve Shaker**

---

79-7200

**Sieve Brush Brass and Nylon**

---

79-0010

**200 mm Diameter Lid**

---

79-0020

**200 mm Diameter Receiver**

---

25-5561

**Porous Disc 50mm Pack of 2**

---

25-5470

**Membrane Placing Tool 50mm Diameter.**

---

25-5461

**Membrane Sealing Ring 50mm Diameter Pack of 10.**

---

25-5430

**Pressure Pad 50mm Diameter.**

---

25-5441

**Rubber Membrane 50mm Diameter Pack of 10.**

---

25-5480

**Suction Membrane Device 50mm Diameter.**

---

25-5530

**Two Part Split Mould 50mm**

---

79-0070

**200mm Dia BS Sieve 63 Mic Stainless Steel Mesh.**

---

79-0135

**200mm Dia Iso:565 3310/1 Sieve 200 Mic Stainless Steel Mesh.**

---

79-0200

**200mm Dia BS Sieve 600Mic Stainless Steel Mesh.**

---

79-0270

**200mm Dia BS Sieve 2.00mm Stainless Steel Mesh.**

---

79-1525

**200mm Dia BS Sieve 6.30mm Perforated Plate.**

---

79-1595

**200mm Dia BS Sieve 20.0mm Perforated Plate.**

---

81-0120

**Spatula 150 mm**

---

81-0590

**Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm**

---

81-0508

**Heat-Resistent Gloves, With Gauntlet**

---

81-0710

**Trimming Knife**

---

81-0805

**Engineer's Steel Rule**

---

81-5040

**Bowl - 5 litre**

---

---

82-7861

**Filter Paper - Fast**

---

82-7720/01

**Vacuum Pump**

---

81-0375

**Rubber Tubing**

---

27-1633

**Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin DIN Plug.**

---

45-9300

**Vacuum Pyknometer, 6000 g**

---

24-0410

**Liquid Limit Device BS with Counter. C/W Metal Grooving Tool & Test Gauge.**

---

24-0430

**Glass Plate.**

---

24-2885

**Pyknometer Complete with Non-Corrodable Cone and Rubber Seal 1Kg Capacity**

---

24-2900

**50MI Density Bottle with Perforated Stopper.**

---

24-2890

**Density Bottle 25MI.**

---

24-2950

**100MI Density Bottle with Perforated Stopper.**

---

25-8090

**Silicon Grease Lubricant.**

---

25-5200

**Filter Paper Drain 38mm/1.5 inch Diameter. Pack of 50.**

---

25-5580

**Filter Paper Drain 50mm Diameter. Pack of 50**

---

# Contents

www.ele.com  
+44 (0) 01525 249 200



25-5181

**Porous Disc 38mm/1.5 inch Diameter. Pack of 2.**

---

25-4290

**Membrane Placing Tool 35mm/38mm.**

---

25-5081

**Membrane Sealing Ring 38mm/1.5 Inch Diameter. Pack of 10.**

---

25-5050

**Pressure Pad 38mm/1.5 Inch Diameter.**

---

25-5061

**Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.**

---

25-5100

**Suction Membrane Device 38mm/1.5 Inch Diameter.**

---

25-5120

**Two-Way Split Former 38mm/1.5 Inch Diameter.**

---



## Submersible Load Transducer Assembly 5kN Capacity In Compression.

Code: [27-1573](#)

Product Group: [Load Measurement, Load Measurement, Submersible Load Transducers](#)

- Eliminates effects of piston friction on readings
- Unaffected by cell confining pressures
- Easily installed in triaxial cell
- Supplied complete with calibration certificate and 5-pin DIN type connector for use with GDU

Submersible Load Transducers are used to measure accurately the axial loads applied to triaxial test specimens. Consisting of a load cell and piston assembly these units replace the standard triaxial cell loading piston. A major advantage is that these transducers measure loads directly on top of the specimen. All transducers are supplied complete with a 5-pin DIN type connector and calibration certificate.

## Specification

Dimensions	75 x 50 mm (dia x h) excluding piston and adaptor
Overload capacity	150%
Output	26 mv full range
Excitation	10 V DC (15 V DC max)
Non-linearity	0.1% maximum
Hysteresis Deflection	0.1% maximum 0.05 mm at full load
Side force	50% full scale maximum without effect
Connector	5-pin DIN plug
Compensated temperature range	0 to 50°C
Weight g	850

## Accessories



## Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)



## Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)

---

### Alternatives



## Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)



## Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)





## Piston Restraint Clamp for Ele Triaxial Cells

Code: [25-4200](#)

Product Group: [Aggressive Materials, General Cell Accessories](#)

For ELE Triaxial Cells Manufactured From July 1996.


### Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

### Further Information

To lock the loading piston into position



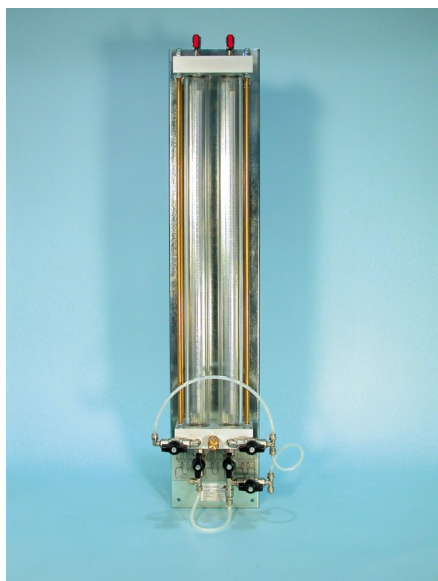

## Twin Burette Volume Change Unit.

Code: [26-1892](#)

Product Group: [Volume Change Measurement](#)

Fitted with reversing valve and by-pass valve. The unit is fitted with burettes graduated 0 to 100 ml x 0.2 ml and is mounted on a solid panel for wall or bench mounting supplied with 100 ml capacity x 0.2 ml burettes.

## Accessories



## Red Dye Kerosene Soluble 10G Phial for Colouring Kerosene.

Code: [26-1900](#)



## Beaker - 100 ml

Code: [82-0120](#)

Product Group: [Beakers and Covers](#)

Borosilicate glass, squat form.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Beaker - 250 ml

Code: [82-0140](#)

Product Group: [Beakers and Covers](#)

Borosilicate glass, squat form.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Beaker - 600 ml

Code: [82-0200](#)

Product Group: [Beakers and Covers](#)

Borosilicate glass, squat form.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## ELE Sieve Shaker

Code: [80-0200/01](#)

Product Group: [ELE Sieve Shaker](#)

The ELE sieve shaker is powered by an electromagnetic drive that has no rotating parts to wear making it maintenance free and extremely quiet in operation.

The unit features a triple Vertical-Lateral-Rotary vibrating action that moves the sample over the sieve producing faster more efficient sieving, while the rapid vertical movements also help keep the apertures from blinding.

The shaker is ideal for laboratory or on site use. It is robust, compact and sufficiently lightweight to be portable. The separate digital microprocessor controlled console unit incorporates a keypad for setting the sieving program and is isolated from any effects of vibration from the shaker.

As standard the shaker includes, timer 0-999 minutes, adjustable vibration intensity and adjustable intermittent or continuous operation.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

The unit accepts up to ten 200 mm or 8 inch, full height, diameter sieves and lid and receiver, or up to six 300 mm or 12 inch diameter sieves and lid and receiver. Complete as specified. Dimensions (l x w x h) 380 x 440 x 1085 mm. For 220 - 240 V AC, 50 Hz 1ph.



## Sieve Brush Brass and Nylon

Code: [79-7200](#)

Product Group: [Sieve Brushes](#)

Double-ended, brass and nylon bristle

## Standards

ASTM E11

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200 mm Diameter Lid

Code: 79-0010

Product Group: Sieve Lids and Receivers ISO and BS, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

## Standards

BS 410-1, ISO 3310

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***





## 200 mm Diameter Receiver

Code: 79-0020

Product Group: Sieve Lids and Receivers ISO and BS, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

### Standards

BS 410-1, ISO 3310

### Further Information

\*\*NOT AVAILABLE FOR SALE IN THE USA\*\*



## Porous Disc 50mm Pack of 2

Code: [25-5561](#)

Product Group: [Accessories for CU/CU effective stress](#), [Porous Stones](#)

50 mm diameter porous disc (Pack Of 2).



## Membrane Placing Tool 50mm Diameter.

Code: [25-5470](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

50 mm Diameter Membrane Placing Tool.

## Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



## Membrane Sealing Ring 50mm Diameter Pack of 10.

Code: [25-5461](#)

Product Group: [Membrane Sealing Rings, Sealing Rings](#)

50 mm diameter membrane sealing ring (Pack Of 10).

### Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084

## Pressure Pad 50mm Diameter.

Code: [25-5430](#)

Product Group: [Specimen Caps, Pressure Pads](#)

50 mm diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



## Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



## Rubber Membrane 50mm Diameter Pack of 10.

Code: [25-5441](#)

Product Group: [Rubber Membranes](#)

50 mm diameter rubber membrane (Pack Of 10).

### Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



## Suction Membrane Device 50mm Diameter.

Code: [25-5480](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

50 mm Diameter Suction Membrane Device.





## Two Part Split Mould 50mm

Code: [25-5530](#)

Product Group: [Two-way Split Moulds](#), [Two-Part Split Mould](#)



## 200mm Dia BS Sieve 63 Mic Stainless Steel Mesh.

Code: [79-0070](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia Iso:565 3310/1 Sieve 200 Mic Stainless Steel Mesh.

Code: 79-0135

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

### Standards

ISO 565, EN933-2, BS410-1

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 600Mic Stainless Steel Mesh.

Code: 79-0200

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

### Standards

BS 410-1, ISO 3310, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 2.00mm Stainless Steel Mesh.

Code: [79-0270](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, EN933-2, ISO 565

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## 200mm Dia BS Sieve 6.30mm Perforated Plate.

Code: 79-1525

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

\*\*NOT AVAILABLE FOR SALE IN THE USA\*\*



## 200mm Dia BS Sieve 20.0mm Perforated Plate.

Code: [79-1595](#)

Product Group: [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#), [200mm Diameter BS Sieves](#)

### Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***





## Spatula 150 mm

Code: [81-0120](#)

Product Group: [Spatulas](#)

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

Code: [81-0590](#)

Product Group: [Determination of the Shape Index,](#)  
[Miscellaneous Laboratory Hardware](#)

Dual measuring range highly accurate vernier caliper 0 to 200mm x 0.01mm (8 inch x 0.001 inch) to comply with bs 887 and bs 6365. Complete with liquid crystal display.

## Standards

EN 933-4

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Accessories



### Vibrating Hammer

Code: [47-0455/01](#)

## Alternatives



### Vibrating Hammer

Code: [47-0455/01](#)



## Heat-Resistant Gloves, With Gauntlet

Code: [81-0508](#)

Product Group: [Miscellaneous Laboratory Hardware](#)

### Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Trimming Knife

Code: [81-0710](#)

Product Group: [Soil Lathes](#), [Miscellaneous Laboratory Hardware](#), [Soil Trimmers \(Lathes\)](#)

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Engineer's Steel Rule

Code: [81-0805](#)

Product Group: [Miscellaneous Laboratory Hardware](#)

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Accessories


### ASTM Initial Set Needle

Code: [38-2620](#)



### ASTM Vicat Mould

Code: [38-2660](#)



## EN Initial and Final Set Needle

Code: [38-2110](#)



## Vibrating Hammer

Code: [47-0455/01](#)

## Spares/Consumables

### Consistency Plunger

Code: [38-2010/10](#)




## Alternatives

### ASTM Initial Set Needle

Code: [38-2620](#)





## ASTM Vicat Mould

Code: [38-2660](#)



## EN Initial and Final Set Needle

Code: [38-2110](#)



## Vibrating Hammer

Code: [47-0455/01](#)





## Bowl - 5 litre

Code: [81-5040](#)

Product Group: [Beakers and Bowls](#)

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Filter Paper - Fast

Code: [82-7861](#)

Product Group: [Filter Papers \(Box of 100\)](#)

No. 55 x 400 mm diameter.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Vacuum Pump

Code: [82-7720/01](#)

Product Group: [Vacuum Pumps](#)

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Specification

Type	Single stage
Pump	Oil filled rotary
Ultimate vacuum	4 x 10 <sup>-2</sup> mbar
Displacement	42 litres per minute (2.4 m <sup>3</sup> /hour)
Electrical supply	220 – 240 V AC, 50 - 60 Hz, 1 ph
Weight	12.7 kg



## Rubber Tubing

Code: [81-0375](#)

Product Group: [Vacuum Pumps, Rubber Tubing](#)

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Specification

Bore	6.5 mm
Wall thickness	5.0 mm
Sold by	Metre



## Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin DIN Plug.

Code: [27-1633](#)

Product Group: [Pressure Measurement](#), [Tri-Flex 2](#)  
[One-Cell Permeability Test System](#), [Pressure](#)  
[Transducer](#)

Pressure Transducers are used to measure the cell, pore and back pressures during triaxial testing. Assemblies are supplied complete with a de-airing block, valve, 5-pin DIN plug connector and calibration certificate

### Specification

Construction	Stainless Steel
Excitation	10 V DC
Output	143 mV full range
Thread	1/4" BSP



## Vacuum Pyknometer, 6000 g

Code: 45-9300

Product Group: Vacuum Pyknometer, Vacuum Pyknometer (6,000 Gram), Specific Gravity (Rice) Test with 6,000 gram Vacuum Pyknometer

The Vacuum Pyknometer is a large capacity unit used in the rice test for determining the maximum specific gravity of bituminous paving mixtures. The Pyknometer has a transparent top for observation and a lightweight polycarbonate construction.

The Pyknometer has a total volume of 10 litres and will conveniently accept samples of 6000 grams to minimise segregation effects.

## Standards

EN 12697-5, ASTM D2041, AASHTO T209, AASHTO T283

## Specification

Capacity	Approximately 10 liters; 6,000 g (13 .2 lbs.) sample weight.
Construction	Lightweight polycarbonate with transparent upper half.
Gauge	2" (50.8 mm) diam., 30" x 0.5" Hg.
Aspirator	Plastic; 3/8" pipe thread (included).
Connections	Water inlet valve; quick disconnect for vacuum gauge and hose.
Dimensions	10-3/4" (273 mm) o.d. x 16" (406 mm) h.
Weight	Net 8 lbs. (3.6 kg).

## Accessories



### 1/4" O.D Plastic Tubing

Code: 45-9301/14



## Drierite Desiccant

Code: [45-9315/14](#)



## Filtering Kit

Code: [45-9301](#)

## Alternatives



## Vacuum Pyknometer (2,000 gram)

Code: [45-9310](#)



## Vacuum Pyknometer Apparatus

Code: [45-9305/01](#)



## Liquid Limit Device BS with Counter. C/W Metal Grooving Tool & Test Gauge.

Code: [24-0410](#)

Product Group: [Casagrande Method](#)

With revolution counter. Complete with metal grooving tool and test gauge.

## Standards

BS 1377-2

## Accessories



### Glass Plate.

Code: [24-0430](#)



## Grooving Tool and Gauge B.S.

Code: [24-0425](#)

## Alternatives



## Motorised Liquid Limit Device W/ Counter BS 220-240V 50Hz 1Ph.

Code: [24-0417/01](#)





## Glass Plate.

Code: [24-0430](#)

Product Group: [Casagrande Method, Determination of Plastic Limit](#)

500 mm square x 10 mm thick.

## Standards

BS 1377-2



## Pyknometer Complete with Non-Corrodable Cone and Rubber Seal 1Kg Capacity

Code: [24-2885](#)

Product Group: [Particle Density: Pyknometer  
Methods, Pycnometer Top and Jar](#)

Glass jar complete with noncorrodible cone.

## Standards

BS 1377, BS 812-2, EN 1097-7, EN 1997-2, ASTM D854, AASHTO T100, ASTM C128, AASHTO T84

## Accessories



### 100MI Density Bottle with Perforated Stopper.

Code: [24-2950](#)



### 50MI Density Bottle with Perforated Stopper.

Code: [24-2900](#)



### Density Bottle 25ML.

Code: [24-2890](#)



## Pyknometer Gasket

Code: [24-2885/11](#)



## Pyknometer Jar Only

Code: [24-2885/10](#)



## Pyknometer Top


Code: [24-2885/12](#)

## Alternatives



## Sand Absorption Cone.

Code: [42-1700](#)

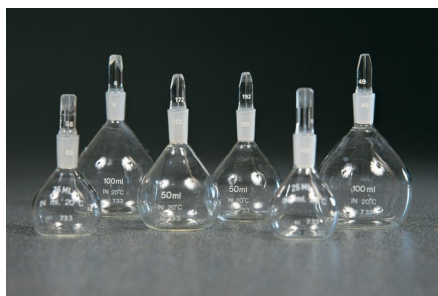

## 50ml Density Bottle with Perforated Stopper.

Code: [24-2900](#)

Product Group: [Particle Density: Pyknometer Methods](#)

Supplied complete with capillary vent stopper.  
Conforms to BS 733, and ISO 3507. Gay-Lussac type.

## Standards

ASTM C128, AASHTO T84

## Accessories



## 100ml Density Bottle with Perforated Stopper.

Code: [24-2950](#)



## Density Bottle 25ml.

Code: [24-2890](#)

## Alternatives




## 100ml Density Bottle with Perforated Stopper.

Code: [24-2950](#)



## Density Bottle 25ml.

Code: [24-2890](#)

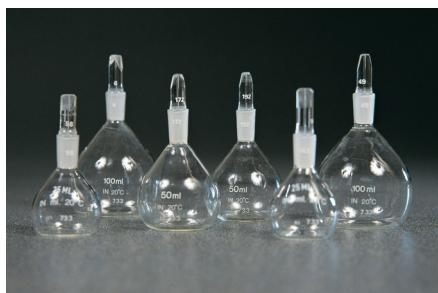

## Density Bottle 25ml.

Code: [24-2890](#)

Product Group: [Particle Density: Pyknometer Methods](#)

Supplied complete with capillary vent stopper.  
Conforms to BS 733 and ISO 3507. Gay-Lussac type.

## Standards

BS 1377, BS 812-2, EN 1097-7, ASTM D854, AASHTO T100

## Accessories



## 100ml Density Bottle with Perforated Stopper.

Code: [24-2950](#)



## 50ml Density Bottle with Perforated Stopper.

Code: [24-2900](#)

## Alternatives



## 100ml Density Bottle with Perforated Stopper.

Code: [24-2950](#)



## 50ml Density Bottle with Perforated Stopper.

Code: [24-2900](#)



## 100ml Density Bottle with Perforated Stopper.

Code: [24-2950](#)

Product Group: [Particle Density: Pyknometer Methods](#)

Supplied complete with capillary vent stopper.  
Gay-Lussac type.

## Standards

ASTM C128, AASHTO T84

## Accessories



## 50ml Density Bottle with Perforated Stopper.

Code: [24-2900](#)



## Density Bottle 25ml.

Code: [24-2890](#)

## Alternatives



## 50ml Density Bottle with Perforated Stopper.

Code: [24-2900](#)



## Density Bottle 25ml.

Code: [24-2890](#)



## Silicon Grease Lubricant.

Code: [25-8090](#)

Product Group: [Aggressive Materials](#)

Silicon Grease Lubricant (Tube).

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297



## **Filter Paper Drain 38mm/1.5 inch Diameter. Pack of 50.**

Code: [25-5200](#)

Product Group: [Accessories for CU/CU effective stress, Filter Paper Drains](#)

Filter paper drain 38 mm diameter (Pack of 50).






## Filter Paper Drain 50mm Diameter. Pack of 50

Code: [25-5580](#)

Product Group: [Accessories for CU/CU effective stress](#), [Filter Paper Drains](#)

Filter paper drain 50 mm diameter (Pack of 50).

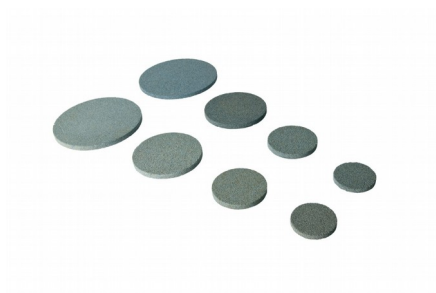

## **Porous Disc 38mm/1.5 inch Diameter. Pack of 2.**

Code: [25-5181](#)

Product Group: [Accessories for CU/CU effective stress, Porous Stones](#)

Porous disc for 38 mm/1.5 inch samples (Pack of 2).



## Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

Membrane Placing Tool For 35Mm/1.4 Inch And 38Mm/1.5 Inch Samples.

## Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

## Accessories



## Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



## Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)

## Alternatives



## Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



## Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)



## Membrane Sealing Ring 38mm/1.5 Inch Diameter. Pack of 10.

Code: [25-5081](#)

Product Group: [Membrane Sealing Rings](#)

Membrane Sealing Ring 38Mm Diameter (Pack Of 10).

### Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084

## Pressure Pad 38mm/1.5 Inch Diameter.

Code: [25-5050](#)

Product Group: [Pressure Pads](#)

38 mm / 1.5 Inch diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



## Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297



## Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.

Code: [25-5061](#)

Product Group: [Rubber Membranes](#)

Rubber Membrane For 38Mm/1.5 Inch Samples  
(Pack Of 10).

### Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



## Suction Membrane Device 38mm/1.5 Inch Diameter.

Code: [25-5100](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

Suction Membrane Device For 38Mm/1.5 Inch Samples.



## Two-Way Split Former 38mm/1.5 Inch Diameter.

Code: [25-5120](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

Two-Way Split Former For 38Mm/1.5 Inch Samples.