



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 05/05/2017, and contains the following Products:

24-0540

Cone Penetrometer. Complete with Stainless Steel Test Cone.

24-0546

Test Gauge for Checking Condition of Cone Point.

24-0548

Penetration Test Cup.

24-9000

BS Standard Compaction Mould 1000Cm Capacity.

24-9002

Standard Compaction Rammer 2.5Kg BS1377-1975

25-3605

Unconfined Compression Tester, Hand-Operated

25-0580

Constant Head Permeability Cell 75mm Diameter Specimen.

25-0591

Manometer Tubes & Stand.

25-0593

Constant Level Tank.

42-4580

Tamping Rod 8mm Dia X 300mm.

81-0200

Aluminium Scoop Small

81-0518

Timer Clock

82-0380

Measuring Cylinder - Glass 100 ml

82-0460

Measuring Cylinder - Glass 500 ml

82-1060

Volumetric Flask - 1000 ml

82-2660

Funnel

25-0440

Dial Gauge 10mm Travel X 0.002mm Divisions.

26-2114/01

Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

26-2132

Set of Weights 50 kg Slotted.

26-2197

Shear Box Assembly 100mm Sq.

26-2201

Specimen Cutter 100mmsq.

26-2205

Specimen Extrusion Tool 100 mm sq

78-0160

Clamped Boss Load Ring - 3.0 kN

83-5456

Dial Gauge

26-2197/10

Porous Plate 100mm Sq.

25-3518/01

Digital Tritest 50 Load Frame

25-4047

50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

25-4166

38mm/1.5 Inch Base Adaptor for 50mm Cells.

Contents

www.ele.com
+44 (0) 01525 249 200



25-4210

Dial Gauge 25mm Travel X 0.01mm Divisions

25-4290

Membrane Placing Tool 35mm/38mm.

25-5050

Pressure Pad 38mm/1.5 Inch Diameter.

25-5061

Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.

25-5081

Membrane Sealing Ring 1.5"

25-5100

Suction Membrane Device 38mm/1.5 Inch Diameter.

25-5120

Two-Way Split Former 38mm/1.5 Inch Diameter.

26-1746

Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

26-1760

Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.

26-1769

Nylon Tubing 30 Metre Length.

26-1880

Universal Pump and Pressure Indicating Panel 1700Kpa.

26-1926

Nylon Tubing 6mm Od 3500Kpa.

78-0260

Clamped Boss Load Ring - 4.5 kN

83-1730/01

Air Compressor

27-1620

Digital Pressure Gauge 1700Kpa. for Ele Triaxial Cells.

26-1928

6mm Elbow Connector.

27-1500/01

GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

27-1551

S-Type Load Cell 5 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

27-1617


Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

27-1633

Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin DIN Plug.

27-1753

DS7.2 Undrained Triaxial Shear Strength Program for Windows 7, 32/64 bit

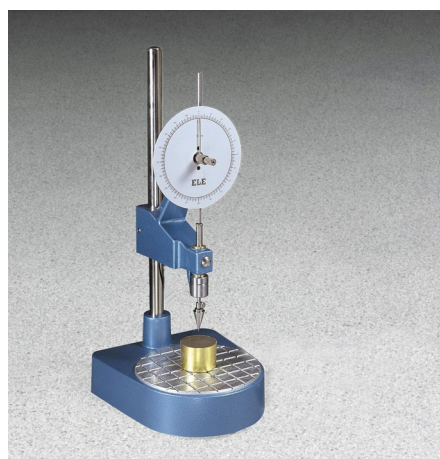

Cone Penetrometer. Complete with Stainless Steel Test Cone.

Code: [24-0540](#)

Product Group: [Cone Penetrometer Method, Cone Penetrometer](#)

Bench mounted apparatus to determine the liquid limit of soils BS1377. This method is applicable to a wide range of soils. The apparatus is fitted with a 150mm diameter dial indicator for direct reading of penetration. Supplied complete with 30deg, 30mm long test cone. Manufactured from stainless steel and includes adjustable levelling feet.

Standards

BS 1377-2

Specification

Dial Indicator	150 mm diameter graduated in 400 x 0.1 mm divisions, indicator point incorporates friction/gear system
Height Adjustment	Rapid, using integral clamping mechanism
Cone release	Manual
Cone	1 x 30°, 35 mm test cone included
Base	Cast aluminium, adjustable levelling feet
Weight kg	7

Accessories



Penetration Test Cup.

Code: [24-0548](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)

Spares/Consumables



Penetration Test Cone

Code: [24-0544](#)

Alternatives



Semi-Automatic Cone Penetrometer

Code: [24-0545/01](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)

Product Group: [Cone Penetrometer Method](#), [Cone Penetrometer](#)

55 mm diameter by 40 mm deep, with the rim parallel to the flat base.

Standards

BS 1377-2



Penetration Test Cup.


Code: [24-0548](#)

Product Group: [Cone Penetrometer](#), [Cone Penetrometer Method](#)

Brass construction, 55mm dia x 4mm depth to fit BS1377

Standards

BS 1377-2

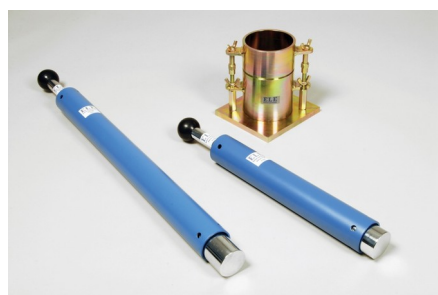

BS Standard Compaction Mould 1000Cm Capacity.

Code: 24-9000

Product Group: BS/EN compaction test 2.5kg,
Accessories for BS compaction and CBR


Plated steel standard compaction mould to BS 1377, comprising of a collar mould body and base plate with quick release wing nuts for easy dismantling.

Standards

BS 1377-4, BS 1924-2

Specification

Mould volume	1 litre
Dimensions	105 mm dia x 115.4 mm high
Construction	All steel, threaded studs with wing nuts, plated.
Weight	5.5 kg

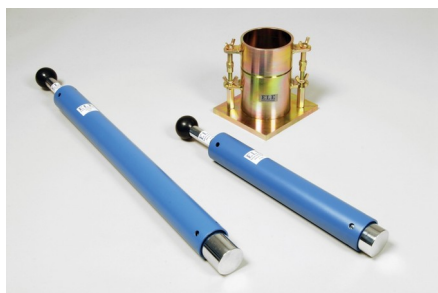

Standard Compaction Rammer 2.5Kg BS1377-1975

Code: [24-9002](#)

Product Group: [BS/EN compaction test 2.5kg](#)

50mm diameter with 300mm drop, manufactured from corrosion protected steel.

Standards

BS 1377-4, BS 1924-2

Specification

Rammer	50 mm dia, 2.5 kg
Drop	300 mm
Guide Sleeve	Machined steel tubing with air pressure release holes
Finish	Corrosion resistant
Weight kg	4.2

Alternatives



BS Compaction Rammer 4.5Kg Wt.

Code: [24-9004](#)



Unconfined Compression Tester, Hand-Operated

Code: [25-3605](#)

Product Group: [Unconfined Compression Tester,
Hand-Operated](#)

6.6 kN load capacity.

Standards

ASTM D2166, AASHTO T208

Specification

Specimen Height	Up to 8" (203 mm).
Platens	3" (76 mm) diam.; with concentric grooves for centering specimen.
Proving Ring	Plated steel; complete with dial indicator and calibration charts in English and Metric units.
Strain Indicator	English: 1.0" range x 0.001" graduations. Metric: 25 mm range x 0.01 mm graduations.
Hand Crank	Two-piece; aluminum.
Base	One-piece; cast aluminum.
Crosshead	High-strength aluminum.
Dimensions	10-5/8" w. x 6-3/8" d. x 26-1/4" h. (270 x 162 x 667 mm).
Weight	Net 43 lbs. (19.5 kg).; Shpg. 58 lbs. (26.3 kg).

Accessories



Unconfined Compression Test Accessory Set, English

Code: [25-3997](#)



Unconfined Compression Test Accessory Set, Metric

Code: [25-3998](#)

Alternatives



Unconfined Compression Test Accessory Set, English

Code: [25-3997](#)



Unconfined Compression Test Accessory Set, Metric

Code: [25-3998](#)



Constant Head Permeability Cell 75mm Diameter Specimen.

Code: [25-0580](#)

Product Group: [Constant Head Apparatus](#)

75 mm Diameter

Standards

BS 1377-5

Specification

Nominal Cell inside diameter	75 mm
Cell wall	Transparent plastic
Take-off points	3
End plates	Anodised aluminium
Weight kg	2.6



Manometer Tubes & Stand.

Code: [25-0591](#)

Product Group: [Constant Head Apparatus](#)

Comprising three glass tubes of constant bore, metre scale and connecting tubing for cell pressure take-off points, all mounted on a free-standing panel. Comprising three glass tubes of constant bore, metre scale and connecting tubing for cell pressure take-off points, all mounted on a free-standing panel.

Standards

BS 1377-5



Constant Level Tank.

Code: [25-0593](#)

Product Group: [Constant Head Apparatus](#)

Manufactured from transparent plastic with attachment for wall mounting. The inlet, outlet and overflow pipes are fitted to the base of the tank and can be adjusted for height within the tank. Supplied complete with connecting tubing.

Standards

BS 1377-5



Tamping Rod 8mm Dia X 300mm.

Code: 42-4580

Product Group: Aggregate Crushing Value (ACV) and
Ten Percent Fines Value (TFV)

Spare: 8mm diameter x 300mm long with rounded
end.

Further Information

NOT AVAILABLE FOR SALE IN THE USA



Aluminium Scoop Small

Code: [81-0200](#)

Product Group: [Scoops and Shovels](#)

82 x 127 x 50 mm, cast aluminium with handle

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Timer Clock

Code: [81-0518](#)

Product Group: [Rice Test Vibrator](#), [Watches and Clocks](#)


Accessory

Standards

EN 12697-5

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

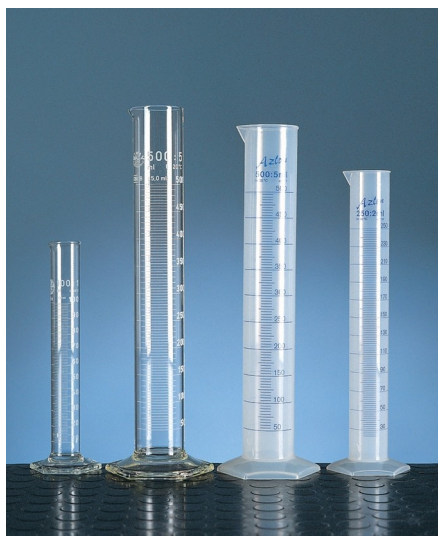

Measuring Cylinder - Glass 100 ml

Code: [82-0380](#)

Product Group: [Measuring Cylinders, BS, Volumetric Shrinkage](#)

Soda glass, spouted, BS EN 4788.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Measuring Cylinder - Glass 500 ml

Code: [82-0460](#)

Product Group: [Measuring Cylinders, BS](#)

Soda glass, spouted, BS EN 4788.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Volumetric Flask - 1000 ml

Code: [82-1060](#)

Product Group: [Funnels and Flasks](#)

Soda glass, stoppered to BS ISO 1042 Class B.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Funnel

Code: [82-2660](#)

Product Group: [Funnels and Flasks](#)

Polythene, 200 mm diameter.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Dial Gauge 10mm Travel X 0.002mm Divisions.

Code: [25-0440](#)

Product Group: [Direct/Residual Shear Apparatus](#),
[Measurement of Horizontal and Vertical Movement](#),
[Vertical settlement measurement](#)

Spares/Consumables



Electronic Digital Indicator, 0.600"/15 mm range

Code: [88-4210](#)



Vertical Dial Indicator, English

Code: [25-0445](#)



Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

Code: 26-2114/01

Product Group: Direct/Residual Shear Apparatus,
Direct/Residual Shear Apparatus

- Microprocessor control
- Large on-board LCD screen display
- Direct entry via touch sensitive keyboard
- Rapid approach and return to start datum
- Fully variable speed, 0.00001 to 9.99999 mm/minute
- Accepts specimens up to 100 mm square

The ELE Direct Shear Apparatus accepts specimens 60 mm, 100 mm square or 2.5 inches in diameter. The use of a microprocessor controlled drive system and keyboard entry gives the apparatus a wide range of features that include pause and speed reset during test, RS 232C interface, operator programming of speed and control functions, self test diagnostics and many other features. A return to start datum provides a positive means of reversing the shearbox when either preparing for a new test or continuing with residual testing procedures.

Safety forward/reverse travel limit switches are fitted as standard and monitored through the electronics system control.

The electronics are housed in a modern moulded shroud, which includes a large LCD display and keyboard entry. The apparatus is enclosed in a robustly constructed case, has been designed for floor mounting and is supplied complete with carriage, loading hanger and 10:1 lever loading device.

Standards

ASTM D3080, AASHTO T236, BS 1377, EN 1997-2

Further Information

for 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Sample Size

Accepts either 2.42", 2.5" diam.; 60 mm square samples using accessory shear box assemblies, not included.

Speed Range

Variable in either English or Metric units

Shear Force
Vertical Load

Dimensions

Weight

between 0.000001"
(0.00001 mm) to 0.399999"
(9.99999
mm) per minute.
1,100 lbf. (5.0 kN) maximum.
2,200 lbf. (10.0 kN) using 10:1
lever ratio.
44.7" l. x 12 .6" w. x 49.6" h.
(1,135 x 320 x 1,260 mm).
Net 181 lbs. (82 kg).

Accessories



Clamped Boss Load Ring - 2.0 kN

Code: 78-0060



Clamped Boss Load Ring - 3.0 kN

Code: 78-0160



Clamped Boss Load Ring - 4.5 kN

Code: 78-0260



Dial Gauge 10mm Travel X 0.002mm Divisions.

Code: 25-0440



Digital Proving Ring, 1,000 lbs (4.5 kN)

Code: [78-0264](#)



Digital Proving Ring, 450 lbs (2.0 kN)

Code: [78-0064](#)



Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



Mechanical Dial Indicator - 25 mm Range Clockwise Movement

Code: [88-4110](#)



S-Type Load Cell 5 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

Code: [27-1551](#)



Set of Weights 50 kg Slotted.

Code: [26-2132](#)



Shear Box Assembly 100mm Sq.

Code: [26-2197](#)



Shear Box Assembly 2.5 Inch Diameter

Code: [26-2213](#)



Shear Box Assembly 60mm Sq.

Code: [26-2181](#)



Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)



Weight Set A

Code: [25-0535](#)



Weight Set B

Code: [25-0537](#)

Spares/Consumables



Dial Indicator - 1.0" Range

Code: [88-4100](#)



Electronic Digital Indicator, 0.600"/15 mm range

Code: [88-4210](#)



Vertical Dial Indicator, English


Code: [25-0445](#)

Alternatives



Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 110-120V 50/60Hz 1Ph.

Code: [26-2114/02](#)



H60 Field Inspection Vane Tester 0-200Kpa In Carrying Case. includes calibration and certificates.

Code: [26-3335](#)



Hand Vane Tester

Code: [26-3346](#)



Laboratory Vane Apparatus with 4 Springs and 12.7mm Vane; Hand Operated.

Code: [26-2270](#)



Pocket Shearmeter with 3 Vanes 0 to 1Kgf/Cm2 X 0.5Kgf/Cm2.

Code: [26-2261](#)



Set of Weights 50 kg Slotted.

Code: [26-2132](#)

Product Group: [Application of Normal Stress](#)

Normal stress is applied to the specimen through the lever loading device and the appropriate slotted weights

Accessories



Slotted Surcharge Weight 0.25 kg

Code: [26-2147](#)



Slotted Surcharge Weight 0.5 kg.

Code: [26-2145](#)



Slotted Surcharge Weight 1 kg.

Code: [26-2143](#)



Slotted Surcharge Weight 10 kg.

Code: [26-2137](#)



Slotted Surcharge Weight 2 kg.

Code: [26-2141](#)



Slotted Surcharge Weight 5 kg.

Code: [26-2139](#)

Alternatives



Slotted Surcharge Weight 0.25 kg

Code: [26-2147](#)



Slotted Surcharge Weight 0.5 kg.

Code: [26-2145](#)



Slotted Surcharge Weight 1 kg.

Code: [26-2143](#)



Slotted Surcharge Weight 10 kg.

Code: [26-2137](#)




Slotted Surcharge Weight 2 kg.

Code: [26-2141](#)



Slotted Surcharge Weight 5 kg.

Code: [26-2139](#)

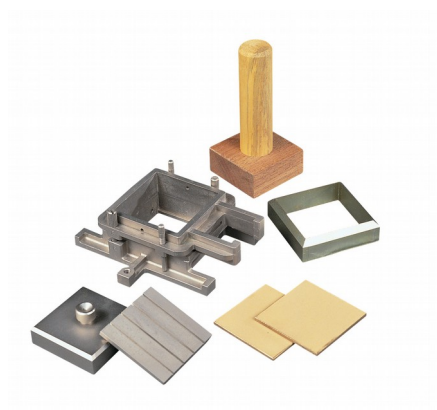

Shear Box Assembly 100mm Sq.

Code: [26-2197](#)

Product Group: [Shear Box Assemblies](#), [Shear Box Assemblies](#)

- Manufactured from corrosion resistant materials
- Sample size 100 x 100mm x 25mm high meeting BS 1377
- Incorporates PTFE faced box separation screws to reduce friction
- Supplied complete with upper and lower porous plates and loading pad
- Suitable for quick undrained or drained/residual tests.

Standards

ASTM D3080, AASHTO T236

Further Information

All shearbox assemblies are designed to fit the carriage of 26-2114 series Digital Direct/Residual Shear Apparatus. They are supplied complete with three porous plates, one retaining plate and a loading pad. The three sizes supplied comply with the relevant requirements of BS 1377 and ASTM D3080. All assemblies can be used for quick shear tests or drained/residual shear tests.

Optional accessories are available including specimen cutters and extrusion tools.

Specification

Specimen area	100 x 100 mm
Specimen thickness	25 mm
Weight kg	5.2
Relevant standard	BS 1377

Accessories



Shear Box Assembly 60mm Sq.

Code: [26-2181](#)

Spares/Consumables



Specimen Cutter 100mmsq.


Code: 26-2201

Alternatives



Shear Box Assembly 60mm Sq.

Code: 26-2181

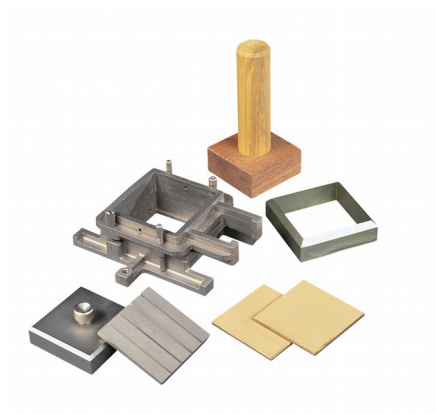

Specimen Cutter 100mmsq.


Code: [26-2201](#)

Product Group: [Shearbox Assemblies- Accessories and Spares](#)

Standards

ASTM D3080, AASHTO T236

Accessories



Shear Box Assembly 100mm Sq.

Code: [26-2197](#)

Spares/Consumables



Specimen Cutter 2.5 Inch Diameter.

Code: [26-2217](#)



Specimen Cutter 60mm Sq.

Code: [26-2185](#)

Alternatives



Specimen Cutter 2.5 Inch Diameter.

Code: 26-2217



Specimen Cutter 60mm Sq.

Code: 26-2185



Specimen Extrusion Tool 100 mm sq

Code: [26-2205](#)

Product Group: [Shearbox Assemblies- Accessories and Spares](#)

Standards

ASTM D3080, AASHTO T236



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)

Product Group: Digital Tritest 50 Load Frame,
Direct/Residual Shear Apparatus, Proving Rings,
Measurement of Load (Shear Stress), Clamped Boss
Load Rings

Standards

BS 1377, ASTM D3080

Specification

Capacity: kN, kgf, lbf	3.0, 300, 650
Typical Design sensitivity: N/div, kgf/div, lbf/div	2.0, 0.20, 0.43
Overall height mm	248
Approx weight kg	3.3
Capacity - lbf	1,000
Capacity - kN	3
Capacity - kgf	300
Typical Design Sensitivity - lbf/div	0.43
Typical Design Sensitivity - kN/div	2
Typical Design Sensitivity - Kgf/div	0.2
Overall Height	9.76" (248 mm)
Approx Weight	7.3 lbs.(3.3 kg)

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)




Dial Gauge

Code: [83-5456](#)

Product Group: [Dial Gauges, Measurement of Horizontal and Vertical Movement](#)

Specification

Diameter mm	57
Travel mm	10
Grad. Mm	0.01
Scale	RH
Anvil	Ball
Back type	A

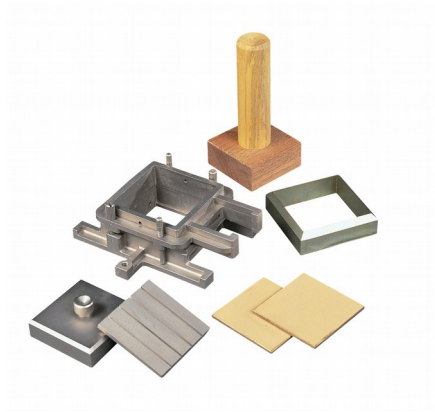

Porous Plate 100mm Sq.

Code: [26-2197/10](#)

Product Group: [Shearbox Assemblies- Accessories and Spares](#)

Standards

ASTM D3080, AASHTO T236



Digital Tritest 50 Load Frame

Code: [25-3518/01](#)

Product Group: [Digital Tritest 50 Load Frame](#), [CBR Load Frames](#), [Triaxial Load Frames](#)

- Microprocessor control
- Large on-board LED screen display
- Direct entry via a touch sensitive keyboard
- Rapid approach and return to datum of platen
- Fully variable speed, 0.00001 to 9.99999 mm/min
- Samples up to 100 mm diameter

This 50 kN capacity machine, designed primarily for triaxial testing of soil specimens up to 100 mm diameter x 200 mm long, comprises a rigid twin column construction with an integral fully variable microprocessor controlled drive unit and LCD display with a touch sensitive keyboard. The machine is normally bench mounted for ease of installation and operation.

The use of a microprocessor controlled drive system and keyboard entry provides the Digital Tritest 50 with a wide variety of features which include pause and speed reset during test, RS 232C, operator programming of speed and control functions, self test diagnostics and many other features.

A robustly constructed steel case houses the motor drive system with careful attention being given to the prevention of ingress of water or grit. All operating controls are mounted on the front panel of the machine, which is angled and recessed to prevent physical and environmental damage.

Standards

BS 1377-7, BS 1377-8, BS 1924-2, ASTM D1883, ASTM D2166, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180, AASHTO T193, AASHTO T208, AASHTO T296, AASHTO T297

Further Information

Complete with RS 232C interface.

Specification

Capacity	50kN (11,200 lbf).
Speed Range	English mode: 0.000001 to 0.399999 in/min. Metric mode: 0.00001 to 9.99999 mm/min.
Rapid Approach Speed	1.0 in/min. (25 mm/min.).

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Platen Travel	100mm (3.9"); limit switch protection.
Platen Diameter	133 mm (5.2")
Vertical Clearance	910 mm, (36 .8") maximum; 305mm, (12") minimum.
Horizontal Clearance	364mm, (15 .3").
Serial Interface	RS232C; programmable baud rate and protocol.
Overall Dimensions	500 x 500 x 1,470 mm, (19.7" w. x 19.7" d. x 57.8" h).
Weight	Net 100kg (220 lbs); Shpg. 136kg (300 lbs).

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Adaptor kit, to perform CBR on the Tritest 50 load frame

Code: [25-3518/10](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)

Alternatives



MultiPlex 50 Load Frame

Code: [25-3700/01](#)



Versa-Loader

Code: [25-3525/02](#)



50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: 25-4047

Product Group: Triaxial Cell, Triaxial Cells

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

Specification

Cell size	50 mm
Max specimen size	50 x 100 mm
Working pressure	1700 kPa
Max piston load	45 kN
Vertical clearance required	380 mm
Horizontal clearance required	155 mm
Weight kg	4

Accessories



38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)

Alternatives



100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4157](#)



70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4117](#)



38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)

Product Group: [Specimen Base Adaptors, Base Pedestals](#)

38mm/1.5 Inch Base Adaptor with Twin Pore Pressure Ports for 50mm Cells.

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

Accessories



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

Alternatives



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)



Dial Gauge 25mm Travel X 0.01mm Divisions

Code: [25-4210](#)

Product Group: [Digital Tritest 50 Load Frame, Axial Displacement](#)

25 mm travel x 0.01 mm

Standards

BS 1377

Accessories



Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1617](#)

Spares/Consumables



Dial Indicator - 1.0" Range

Code: [88-4100](#)

Alternatives



Digital Tritest 50 Load Frame

Code: [25-3518/02](#)



Electronic Digital Indicator, 1.0"/25.4 mm range

Code: [88-4220](#)



Versa-Loader

Code: [25-3525/02](#)



Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

Membrane Placing Tool For 35Mm/1.4 Inch And 38Mm/1.5 Inch Samples.

Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

Accessories



Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)

Alternatives



Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)

Pressure Pad 38mm/1.5 Inch Diameter.

Code: [25-5050](#)

Product Group: [Pressure Pads](#)

38 mm / 1.5 Inch diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297



Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.

Code: [25-5061](#)

Product Group: [Rubber Membranes](#)

Rubber Membrane For 38Mm/1.5 Inch Samples
(Pack Of 10).

Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



Membrane Sealing Ring 1.5"

Code: [25-5081](#)

Product Group: [Sealing Rings](#)

Membrane Sealing Ring 38Mm Diameter (Pack Of 10).



Suction Membrane Device 38mm/1.5 Inch Diameter.

Code: [25-5100](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

Suction Membrane Device For 38Mm/1.5 Inch Samples.



Two-Way Split Former 38mm/1.5 Inch Diameter.

Code: [25-5120](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

Two-Way Split Former For 38Mm/1.5 Inch Samples.



Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

Code: 26-1746

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

With transparent plastic chamber for operating continuously at pressures up to 1000 kPa. A length of tubing is provided for connecting the air/water cylinder outlet to a pressure measuring system.

- Used to supply hydraulic pressure from a pneumatic pressure source.
- Prevents air entering the hydraulic pressure system.
- Maximum working pressure 1000kpa.
- Supplied with connectors and tubing for fitting to pressure measuring systems.

Accessories



Nylon Tubing 30 Metre Length.

Code: 26-1769

Spares/Consumables




Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.

Code: 26-1760



Replacement Bladder Wide Neck (38mm Id)

Code: 26-1746/10

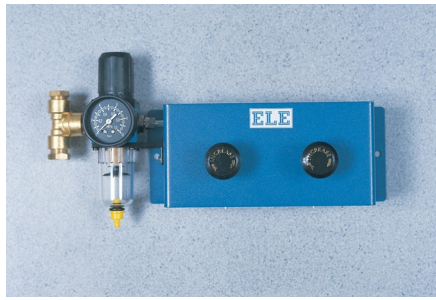

Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.

Code: [26-1760](#)

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

Comprising two constant pressure reducing valves with inlet water trap and pressure indicator. The unit allows a maximum output pressure of 1000 kPa. Maximum input pressure should not exceed 1400 kPa. The panel has an inlet connector to accept Nylon tubing from the air compressor and two 6 mm outlets for connecting Bladdertype Air/Water Pressure Assemblies. An outlet connector is fitted for the connection of an additional panel using Nylon tubing to increase the total capacity of the system. This outlet is blanked off when not required.



Nylon Tubing 30 Metre Length.


Code: [26-1769](#)

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

30 metre length. For pressures up to 1700 kPa. Used for connecting Air Compressors to Pneumatic Pressure Reducing Panels, or for connecting two Pressure Reducing Panels together.

Further Information

Nylon tubing 30 metres with pressure fittings.

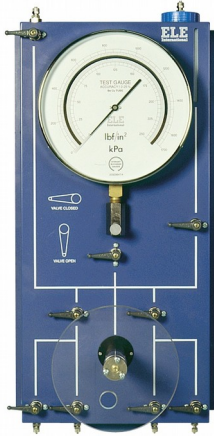


Universal Pump and Pressure Indicating Panel 1700Kpa.

Code: [26-1880](#)

Product Group: [Modular Pressure Panel System](#)

This is the main pressure display in the system for monitoring various pressures and also provides fine control of the pressure within the system using the rotary hand pump. The unit is fitted with a dual calibrated 250 mm diameter pressure gauge, four inlet/outlet no-volume change valves, screw controlled rotary hand pump, water reservoir and isolating valves. The unit is housed in a hinged case for wall or bench mounting. By using an isolating valve the panel may be used to monitor cell or back pressure. 1700 kPa and 250 lbf/in².

Spares/Consumables



Pressure Gauge 1700Kpa (250Psi) 250mm Diameter.

Code: [26-1865/10](#)



Nylon Tubing 6mm Od 3500Kpa.

Code: [26-1926](#)

Product Group: [Permeability of Rock, Volume Change Measurement](#)

6 mm outside diameter x 4 mm inside diameter. For use up to a pressure of 3500 kPa. Priced per metre.



Clamped Boss Load Ring - 4.5 kN

Code: 78-0260

Product Group: Clamped Boss Load Rings, Digital Tritest 50 Load Frame, Load Measurement, Load Measurement, Direct/Residual Shear Apparatus, Proving Rings, Load Measurement

Specification

Capacity: kN, kgf, lbf	4.5, 450, 1000
Typical Design sensitivity: N/div, kgf/div, lbf/div	3.0, 0.30, 0.66
Overall height mm	248
Approx weight kg	3.5
Capacity - lbf	1,000
Capacity - kN	4.5
Capacity - kgf	450
Typical Design Sensitivity - lbf/div	0.66
Typical Design Sensitivity - kN/div	3
Typical Design Sensitivity - Kg/div	0.3
Overall Height	9.76" (248 mm)
Approx Weight	7.7 lbs.(3.5 kg)

Accessories



50kN Clamped Boss Load Ring

Code: 78-0860



Clamped Boss Load Ring - 10.0 kN

Code: 78-0460



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Digital Proving Ring, 1,000 lbs (4.5 kN)

Code: [78-0264](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Digital Proving Ring, 1,000 lbs (4.5 kN)

Code: [78-0264](#)



Air Compressor

Code: 83-1730/01

Product Group: Air Compressors, Air/Water Pressure Systems - up to 1000 kPa

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (l x w x h)	483 x 457 x 864 mm
Free air delivery	2.0 cfm
Receiver capacity	50 litres
Maximum pressure	1000 kPa
Continuous working pressure	700 kPa
Electrical supply	220 – 240 V AC 1 ph 50 Hz
Water Trap	No
Weight	57 kg



Digital Pressure Gauge 1700Kpa. for Ele Triaxial Cells.

Code: 27-1620

Product Group: Oil/Water Constant Pressure System, Pressure Measurement, Digital Pressure Gauge

For ELE Triaxial Cells. The Digital Pressure Gauge offers highly accurate pressure measurement and digital readout for ELE triaxial cells.

Standards

ASTM D2850, ASTM D4767, ASTM D7181, ASTM D5084, AASHTO T296, AASHTO T297

Specification

Capacity	250 psi (1,700 kPa).
Display	LCD.
Display Units	PSI, kPa, MPa.
Accuracy	Better than 1% of indicated pressure.
Read Rate	Two samples per second.
Power Supply	3 volt battery, CR 2340 type.
Battery Life	1400 hours continuous operation.
Dimensions	2.30" w. x 1.25 " d. x 3.75" h. (59 x 32 x 95 mm.)
Weight	Net 1/4 lb. (125 g).



6mm Elbow Connector.

Code: [26-1928](#)

Product Group: [Volume Change Measurement](#)



GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

Code: 27-1500/01

Product Group: Data Logging with the GDU, Geotechnical Data Acquisition Unit (GDU), Automatic Data Acquisition - CBR, Automatic Data Acquisition - Triaxial, Automatic Data Acquisition - Consolidation, Automatic Data Acquisition - Direct Shear

The GDU is a stand-alone, multi-tasking, multi-channel data logger, that is reliable and powerful, enabling it to co-ordinate test data from the range of ELE transducers required for various test methods.

The ELE Geotechnical Software package (DS7.1), in conjunction with the GDU and a range of transducers, are the two central components required to create a modern turnkey soil testing system. Being fully modular it can be adapted to a wide range of soil testing laboratory configurations.

- For performing CBR, Consolidation, Direct/Residual Shear and Total & Effective Stress Triaxial tests
- 8 Channels expandable to 32 for performing multiple, concurrent tests for cost savings
- Independent signal conditioning on each channel to maintain data accuracy
- Field-upgradeable software, meaning no downtime for future software and functionality upgrades
- Extended warranty.

Specification

Case	Aluminum, free standing; houses power supply, analog to digital conversion module and an 8-channel analog input module with transducer energization.
Sockets	Standard 5-pin DIN type.
Input Range	± 5 volts to ± 10 mV full scale.
Transducer Supply	10vDC.
Dimensions	12.8" w. x 14.3" d. x 6.1" h. (325 x 363 x 155 mm).
Weight	Net 14.08 lbs. (6.4 kg).

Accessories



8-Channel Expansion Analog Input Module

Code: [27-1505](#)



USB to Serial Adapter

Code: [27-1701](#)

Alternatives



GDU 8 Channel Data Acquisition Unit 100-120 V 60 Hz

Code: [27-1500/02](#)



RS232/USB Cable, GDU

Code: [27-1510](#)



S-Type Load Cell 5 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

Code: [27-1551](#)

Product Group: [Load Measurement, Load Measurement](#)

- Repeatability better than $\pm 0.02\%$ of rated output
- Non-Linearity better than $\pm 0.03\%$ of rated output
- Supplied complete with 5-pin DIN type connector for connection to GDU

Ideally suited for a wide range of applications, ELE S-type load cells provide high accuracy and minimum deformation. Various models are available, with the necessary adaptors, for use with ELE Triaxial Load Frames, Multiplex 50/Marshall Test 50/CBR Test 50 and Direct Shear machine.

Accessories



50kN S-type Load Cell

Code: [27-1559](#)



S-Type Load Cell 10 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

Code: [27-1553](#)



S-Type Load Cell 25 kN.for Triaxial Tests. 27-1293 required separately.

Code: [27-1555](#)



S-Type Load Cell 5 kN.for Use with Direct/ Residual Shear Machine. Fitted with 5 Pin Din Plug.

Code: [27-1561](#)

Alternatives



50kN S-type Load Cell

Code: [27-1559](#)



S-Type Load Cell 10 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

Code: [27-1553](#)



S-Type Load Cell 25 kN.for Triaxial Tests. 27-1293 required separately.

Code: [27-1555](#)



S-Type Load Cell 5 kN.for Use with Direct/ Residual Shear Machine. Fitted with 5 Pin Din Plug.

Code: [27-1561](#)



Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1617](#)

Product Group: [Axial Displacement](#), [Axial Displacement](#), [Displacement Transducers](#)

0 to 50 mm range. For use with Triaxial Cells.

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	10V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45

Accessories



Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)

Spares/Consumables



CBR Displacement Transducer

Code: [27-1706](#)

Alternatives



Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)



Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin DIN Plug.

Code: 27-1633

Product Group: [Pressure Measurement](#), [Tri-Flex 2 One-Cell Permeability Test System](#), [Pressure Transducer](#)

Pressure Transducers are used to measure the cell, pore and back pressures during triaxial testing. Assemblies are supplied complete with a de-airing block, valve, 5-pin DIN plug connector and calibration certificate

Specification

Construction	Stainless Steel
Excitation	10 V DC
Output	143 mV full range
Thread	1/4" BSP



DS7.2 Undrained Triaxial Shear Strength Program for Windows 7, 32/64 bit

Code: [27-1753](#)

Product Group: [DS7](#), [DS7.2 Quick Undrained Triaxial Software](#), [Automatic Data Acquisition - Triaxial](#)

- Options for single or multi-stage testing on a sample
- Mohr circles produced for graphical analysis

Options are available for a single test on one sample, standard three-sample procedure with linking of the results, or for a multi-stage test on one sample. Load and strain are monitored through transducers. Various printouts and graphical plots are available including basic sample data, moisture content and density. The program tabulates shearing data and plots stress against strain. Mohr circles are produced for graphical analyses.