



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 05/05/2017, and contains the following Products:

24-9275

Dial Gauge 25mm Travel X 0.01mm Divisions.

24-9262

Swell Stand

46-5295/01

Semi-Automatic Penetrometer

46-5340/C

Penetration Needle

46-5861

Penetration Tin

46-5800

Transfer Dish

25-0402

Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

25-0408

Set of Weights 100Kg Total Weight.

25-0440

Dial Gauge 10mm Travel X 0.002mm Divisions.

25-0455

Consolidation Cell Complete 50mm Diameter Sample.

25-0461

Calibration Disc 50mm Cell

25-0458

Cutting Ring 50mm Cell.

25-0455/13

50mm Dia Upper and Lower Porous Stones for Use on EL25-0455 Series Cell.

79-1640

200mm Dia BS Sieve 37.5mm Perforated Plate.

79-0300

200mm Dia BS Sieve 3.35mm Stainless Steel Mesh.

79-0010

200 mm Diameter Lid

79-0020

200 mm Diameter Receiver



Dial Gauge 25mm Travel X 0.01mm Divisions.

Code: [24-9275](#)

Product Group: [Expansion \(swell\) Test Equipment](#)

25 mm travel x 0.01 mm.



Swell Stand

Code: [24-9262](#)

Product Group: [Expansion \(swell\) Test Equipment, Tripod Attachment](#)

For mounting Swell Dial Gauge in position on CBR mould collar.

Standards

ASTM D1883, AASHTO T193

Further Information

Requires dial indicator; not included, order separately

Specification

Construction	Machined, one-piece cast aluminum.
Contact Head	Integral part of ssembly; holds dial indicator.
Construction	2" I. (50.8 mm) included.
Weight	Net 1 lb. (0.4 kg).


Accessories



Mechanical Dial Indicator - 25 mm Range Clockwise Movement

Code: [88-4110](#)

Spares/Consumables



Dial Indicator - 1.0" Range


Code: [88-4100](#)

Alternatives



Electronic Digital Indicator, 1.0"/25.4 mm range

Code: [88-4220](#)

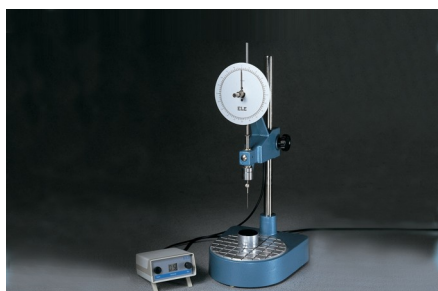

Semi-Automatic Penetrometer

Code: [46-5295/01](#)

Product Group: [Penetration Test](#)

As 46-5290 but incorporates Digital Automatic Controller which releases the needle assembly. The time set is displayed by a bright, easy to read display.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Constant Temperature Bath 21 - 56°C

Code: [46-5500/01](#)



Penetration Needle

Code: [46-5360/10](#)



Penetration Needle

Code: [46-5340/C](#)



Penetration Tin


Code: [46-5861](#)



Transfer Dish

Code: [46-5800](#)

Spares/Consumables



ASTM (Non-Certified) Penetration Needle

Code: [46-5290/10](#)



Penetration Needle

Code: [46-5340/C](#)

Product Group: [Penetration Test](#)

Hardened steel, supplied with an UKAS verification certificate. For testing to BS 2000-49 and ASTM D5. (Pack contains 1 needle only).

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Penetration Tin

Code: [46-5861](#)

Product Group: [Penetration Test](#)

For penetrations below 200, approximately 55 mm diameter x 35 mm deep.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Transfer Dish

Code: [46-5800](#)

Product Group: [Bitumen Penetration Test](#), [Asphalt Penetrometer](#), [Penetration Test](#)

For use with ELE Penetrometer 46-5295.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49



Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

Code: 25-0402

Product Group: Consolidation Apparatus, Table Top Consolidation Apparatus

- High capacity - 8800 kPa on 50 mm diameter specimens using 11:1 beam ratio
- Triple beam ratio, 9:1, 10:1, 11:1
- Compact unit ensures maximum space saving

The ELE Oedometer is rigidly constructed to ensure minimum frame distortion. The frame is designed to load the specimen through a yoke assembly and one of three alternative beam ratios. The beam is fitted with a counterbalance weight and beam support jack. The cell platform will accept the complete range of ELE consolidation cells and is fitted with a central spigot to ensure accurate centring of the cell under the loading yoke. Dimensions without hanger 711 x 203 x 508 mm (l x w x h). Weight 22 kg.

Standards

ASTM D2435, ASTM D4546, AASHTO T216, ASTM D3877, BS 1377-5

Further Information

Supplied without dial gauge and weights.

Specification

Load Capacity	48 tons/sq. ft. (5,148 kPa) on 2.5" (63 mm) diam. samples.
Loading Beam	Cast aluminum; counterbalanced; 9:1, 10:1 and 11:1 ratios.
Frame	Cast aluminum; integral beam support jack; plated steel and platform.
Dimensions	203 x 711 x 508 mm, (8" w. x 28" d. x 20" h) . excluding weight hanger.
Weight	(Net 30 lbs). 13.6 kg; Shpg. 40 lbs. (18.1 kg).

Accessories



16 Ton Weight Set

Code: [25-0544](#)



2.416" Fixed Ring Consolidometer

Code: [25-0480](#)



2.5" Floating Ring Consolidometer

Code: [25-0530](#)



Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.

Code: [25-0479](#)



Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)



Consolidation Cell/ Oedometer Complete 75mm Diameter Sample

Code: [25-0503](#)



Floor Mounting Stand.

Code: [25-0429](#)



Mechanical Dial Indicator - 0.4" Range

Code: [88-4070](#)



Mechanical Dial Indicator - 1.0" Range Counter Clockwise Movement

Code: [88-4120](#)



Mechanical Dial Indicator - 10 mm Range

Code: [88-4080](#)



Mechanical Dial Indicator - 25 mm Range Counter Clockwise Movement

Code: [88-4130](#)



Set of Weights 100Kg Total Weight.

Code: [25-0408](#)



Weight Set A

Code: [25-0535](#)



Weight Set B

Code: [25-0537](#)


Spares/Consumables



Electronic Digital Indicator, 0.600"/15 mm range

Code: [88-4210](#)

Alternatives



Pneumatic Consolidation Apparatus

Code: [25-0560](#)



Set of Weights 100Kg Total Weight.


Code: [25-0408](#)

Product Group: [Consolidation Apparatus](#)

9 x 10 kg, 1 x 5 kg, 2 x 2 kg, 1 x 1 kg.

Standards

ASTM D2435, ASTM D4546, AASHTO T216, ASTM D3877, BS 1377-5

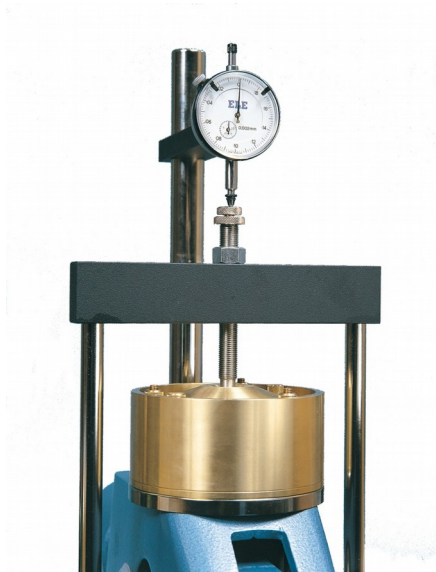

Dial Gauge 10mm Travel X 0.002mm Divisions.

Code: [25-0440](#)

Product Group: [Direct/Residual Shear Apparatus](#),
[Measurement of Horizontal and Vertical Movement](#),
[Vertical settlement measurement](#)

Spares/Consumables



Electronic Digital Indicator, 0.600"/15 mm range

Code: [88-4210](#)



Vertical Dial Indicator, English

Code: [25-0445](#)



Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)

Product Group: [Table Top Consolidation Apparatus](#), [Pneumatic Consolidation Apparatus](#), [Fixed Ring Consolidation](#), [High pressure application consolidation cells and accessories](#)

Specification

Application	High pressure
Specimen Dia	50 mm
Specimen area	1963 mm ²
Beam ratio	10:1
Load kg	1
Stress	50 kPa
Typical max stress	8 MPa
Stress for 1 kg m ²	50 kPa
Application	High Pressure
Specimen Diameter	50 mm
Specimen Area	1963 mm ²
Beam Ratio	10:01
Load	1 kg
Stress	50 kPa
Typical Maximum Stress	8 MPa
Stress for 1 kg	50 kPa

Accessories



Calibration Disc 50mm Cell

Code: [25-0461](#)



Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.

Code: [25-0479](#)



Consolidation Cell/ Oedometer Complete 75mm Diameter Sample

Code: [25-0503](#)

Spares/Consumables



50mm Dia Upper and Lower Porous Stones for Use on EL25-0455 Series Cell.

Code: [25-0455/13](#)



Cutting Ring 50mm Cell.

Code: [25-0458](#)

Alternatives



Calibration Disc 50mm Cell

Code: [25-0461](#)



Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.

Code: [25-0479](#)



Consolidation Cell/ Oedometer Complete 75mm Diameter Sample

Code: [25-0503](#)



Calibration Disc 50mm Cell

Code: [25-0461](#)

Product Group: [High pressure application consolidation cells and accessories](#), [Fixed Ring Consolidation](#)

Accessories



Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)

Alternatives



Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)



Cutting Ring 50mm Cell.

Code: [25-0458](#)

Product Group: [High pressure application consolidation cells and accessories](#), [Fixed Ring Consolidation](#)

Accessories



Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)



50mm Dia Upper and Lower Porous Stones for Use on EL25-0455 Series Cell.

Code: [25-0455/13](#)

Product Group: [Fixed Ring Consolidation](#), [High pressure application consolidation cells](#) and [accessories](#)

Accessories



Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)



200mm Dia BS Sieve 37.5mm Perforated Plate.

Code: 79-1640

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



200mm Dia BS Sieve 3.35mm Stainless Steel Mesh.

Code: 79-0300

Product Group: 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, EN933-2, ISO 565

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



200 mm Diameter Lid

Code: 79-0010

Product Group: Sieve Lids and Receivers ISO and BS, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310

Further Information

NOT AVAILABLE FOR SALE IN THE USA



200 mm Diameter Receiver

Code: 79-0020

Product Group: Sieve Lids and Receivers ISO and BS, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves, 200mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310

Further Information

NOT AVAILABLE FOR SALE IN THE USA