



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 11/05/2017, and contains the following Products:

---

79-7230

**Coarse Sieve Brush - wire bristles**

---

24-4640

**Soil Hydrometer Type 152H ASTM/Aashto Graduated -5 to + 60G/Litre.**

---

88-4474

**Armored Thermometer, 50° to 440°F x 5.0°**

---

88-4480NT

**Glass Laboratory Thermometer, -20° to 110°C x 1.0°; 12" (305 mm) l.**

---

24-4145

**Sodium Hexametaphosphate 500G.**

---

88-6012

**Graduated Cylinder**

---

78-5456/01

**Electronic Balance - 4600 g x 0.01 g**

---

24-4132/02

**Mechanical Analysis Stirrer 120vAC**

---

88-6810

**Soil Mortar**

---

82-0200

**Beaker - 600 ml**

---



## Coarse Sieve Brush - wire bristles

Code: [79-7230](#)

Product Group: [Sieve Analysis Test](#), [Sieve Brushes](#), [Brushes](#)

## Specification

Construction	teel wire bristles with wire loop handle, 1/4" wide x 5-1/2" long (32 x 140 mm).
Construction	Wire bristles with wire loop handle. 1-1/4" w. x 5-1/2" l. (32 x 140 mm).
Weight	Net 1 oz. (28 g).

## Alternatives



### Fine Sieve Brush - 1-1/4" x 5-3/4"

Code: [79-7220](#)



### Fine Sieve Brush - 1" x 10-1/2"

Code: [79-7225](#)



## Soil Hydrometer Type 152H ASTM/Aashto Graduated -5 to +60G/Litre.

Code: [24-4640](#)

Product Group: [ASTM Soil Hydrometers, Soil Hydrometers](#)

Graduated -5 to +60 g/litre.

## Standards

BS 1377, EN 1997-2, ASTM D422, ASTM E100, AASHTO T88

## Specification

Construction	Molded, seamless.
Scale	Bouyoucos; double scale.
Calibration	At 68°F.
Weight	Net 4 oz. (113 g).

## Alternatives



## Soil Hydrometer BS EN DD ENV graduated 0.995 to 1.030 g/ml

Code: [24-4620](#)



## Soil Hydrometer Type 151H ASTM D422 Graduated 0.995 to 1.038 Specific Gravity.

Code: [24-4650](#)



## Armored Thermometer, 50° to 440°F x 5.0°

Code: [88-4474](#)

Product Group: [Armored Thermometers](#)

For asphalt. 50° to 440°F x 5.0°; 6.3" (160 mm).  
Contains mercury.

## Specification

Construction

Glass; with armored point;  
pocket case and clip.

Weight


Net 2 oz. (56 g).

## Alternatives




## Armored Thermometer, 20° to 120°F x 1.0°

Code: [88-4472NT](#)




## Glass Laboratory Thermometer - -30° to 120°F x 1.0°; 12" (305 mm) I.

Code: [88-4490](#)



## Glass Laboratory Thermometer, -20° to 110°C x 1.0°; 12" (305 mm) I.


Code: [88-4480NT](#)



**Glass Laboratory Thermometer, -20° to 150°C x 1.0°; 12” (305 mm) I.**

Code: 88-4482NT



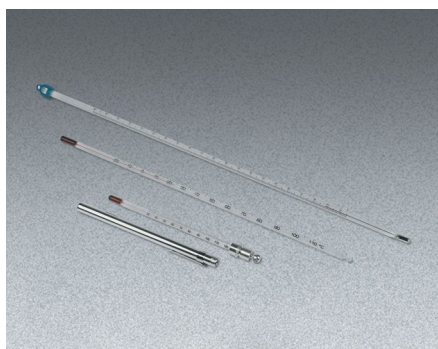

## Glass Laboratory Thermometer, -20° to 110°C x 1.0°; 12" (305 mm) l.

Code: [88-4480NT](#)

Product Group: [Glass Laboratory Thermometers](#)

Non-Toxic

## Specification

Weight

Net 3 oz. (85 g).

## Alternatives




### Armored Thermometer, 20° to 120°F x 1.0°

Code: [88-4472NT](#)




### Armored Thermometer, 50° to 440°F x 5.0°

Code: [88-4474](#)



## Glass Laboratory Thermometer - -30° to 120°F x 1.0°; 12" (305 mm) l.

Code: [88-4490](#)



## Glass Laboratory Thermometer, -20° to 150°C x 1.0°; 12" (305 mm) l.

Code: [88-4482NT](#)







## Sodium Hexametaphosphate 500G.

Code: [24-4145](#)

Product Group: [Sodium Hexametaphosphate,](#)  
[Mechanical Analysis Stirrer](#)

## Standards

ASTM D422, AASHTO T88, ASTM E100

## Spares/Consumables



## Solid Rubber Stopper

Code: [4699-0881](#)



## Graduated Cylinder

Code: [88-6012](#)

Product Group: [Glass Graduated Cylinders, Bitumen Extraction Test](#)

1000 ml

## Further Information

2 units required for Bitumen Extraction Test.

## Specification

Numbering

Double; with zero at top and bottom.

Packing

1 cylinder/carton.

## Alternatives



### Glass Graduated Cylinder - 10 ml Capacity

Code: [88-6000](#)



### Glass Graduated Cylinder - 100 ml Capacity

Code: [88-6007](#)



## Glass Graduated Cylinder - 25 ml Capacity

Code: [88-6002A](#)



## Glass Graduated Cylinder - 50 ml Capacity

Code: [88-6004](#)



## Glass Graduated Cylinder - 500 ml Capacity

Code: [88-6010](#)



## Graduated Cylinder

Code: [88-6012](#)



## Plastic Graduated Cylinder - 1 Litre Capacity

Code: [88-6030](#)



## Plastic Graduated Cylinder - 100 ml Capacity

Code: [88-6024](#)



## Plastic Graduated Cylinder - 50 ml Capacity

Code: [88-6022](#)



## Plastic Graduated Cylinder - 500 ml Capacity

Code: [88-6028](#)



## Electronic Balance - 4600 g x 0.01 g

Code: [78-5456/01](#)

Product Group: [Electronic Balances](#)

## Further Information

**\*\*Not available for sale in the USA\*\***

## Specification

Capacity resolution	4500 g x 0.01 g
Pan size	160 x 160 mm
Mains and battery	No
Dimensions (w x d x h)	220 x 310 x 90 mm
Weight	6 kg
Weighing units	g, kg, lb, lb:oz, oz, ozt, T, custom unit.
Repeatability	0.02 g
Power supply	100-240V, 50/60Hz, 1pH



## Mechanical Analysis Stirrer 120vAC

Code: [24-4132/02](#)

Product Group: [Mechanical Analysis Stirrer](#)

### Standards

ASTM D422, AASHTO T88

### Further Information

110vAC, 50/60 Hz, 1Ø. 125 Watts

### Specification

Motor	Universal AC-DC; up to 75 cycles; 3-speed selectable.
Speeds at No Load	Low: 13 ,000 rpm. Medium: 16,000 rpm. High: 18,000 rpm.
Housing	Die-cast aluminum; stainless steel front panel; baked enamel finish.
Controls	Rotary speed control switch; on-off switch.
Mixing Paddle	Disc-shaped; nickel-plated steel.
Dispersion Cup	4 stationary baffles, permanently mounted; rounded bottom.
Dimensions	7" w. x 6-1/2" d. x 20" h. (178 x 165 x 508 mm).
Weight	Net 15 lbs. (7 kg).
Motor	Universal AC-DC; up to 75 cycles; 3-speed selectable.
Speeds at No Load	Low: 13 ,000 rpm. Medium: 16,000 rpm. High: 18,000 rpm.
Housing	Die-cast aluminum; stainless steel front panel; baked enamel finish.
Controls	Rotary speed control switch; on-off switch.
Mixing Paddle	Disc-shaped; nickel-plated steel.

# Product Sheet

www.ele.com  
+44 (0) 01525 249 200



Dispersion Cup	4 stationary baffles, permanently mounted; rounded bottom.
Dimensions	7" w. x 6-1/2" d. x 20" h. (178 x 165 x 508 mm).
Weight	Net 15 lbs. (7 kg).

---

## Spares/Consumables



### Mixing Paddle

Code: [24-4132/11](#)

---



### Soil Dispersion Cup

Code: [24-4132/10](#)

---

## Alternatives



### Mechanical Analysis Stirrer 220-240vAC

Code: [24-4132/01](#)





## Soil Mortar

Code: [88-6810](#)

Product Group: [Soil Mortar and Pestle](#)

## Specification

Mortar

Porcelain; glazed outside; 5 1/2" diam. x 2-1/2" h. (127 x 64 mm).

Pestle

Rubber tip with wood handle; 8 1/2" (203 mm) long.

Weight

Net 4 lbs. (1.8 kg).

## Alternatives



### Mortar & Pestle - 225 ml Capacity, 7" Length

Code: [88-6802](#)



### Mortar & Pestle - 650 ml Capacity, 9" Length

Code: [88-6804](#)



## Beaker - 600 ml

Code: [82-0200](#)

Product Group: [Beakers and Covers](#)

Borosilicate glass, squat form.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***