



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 01/06/2017, and contains the following Products:

---

25-4186

**100 mm Base Adaptor for 100 mm Triaxial Cell.**

---

25-4200

**Piston Restraint Clamp for Ele Triaxial Cells**

---

25-7590

**Pressure Pad 100mm Diameter.**

---

25-7610

**Membrane Placing Tool 100mm/4 Inch Diameter.**

---

25-7621

**Rubber Membrane 100mm/4 Inch Diameter. Pack of 10**

---

25-7631

**Membrane Sealing Ring 100mm Diameter. Pack of 10.**

---

25-7640

**Suction Membrane Device 100mm/4 Inch Diameter.**

---

25-7650

**Two-Way Split Former 100mm Diameter.**

---

25-7661

**Porous Disc 100mm Diameter Pack of 2.**

---

25-7670

**Filter Paper Drain 100mm/4 inch Diameter. Pack of 50.**

---

26-1746

**Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.**

---

26-1760

**Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.**

---

26-1769

**Nylon Tubing 30 Metre Length.**

---

26-1880

## Universal Pump and Pressure Indicating Panel 1700Kpa.

---

26-1926

### Nylon Tubing 6mm Od 3500Kpa.

---

27-1293

### Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

---

27-1500/01

### GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

---

27-1575

### Submersible Load Transducer Assembly 10kN Capacity In Compression.

---

27-1617

### Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

---

27-1633

### Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin DIN Plug.

---

27-1641

### Volume Change Transducer Assembly 80ml Capacity Maximum Working Pressure 1700KPa

---

27-1753

### DS7.2 Undrained Triaxial Shear Strength Program for Windows 7, 32/64 bit

---

27-1763

### DS7.2 CU/CD Triaxial Shear Strength Program for Windows 7, 32/64 bit

---

83-1730/01

### Air Compressor

---

26-1930

### 6mm T Connector.

---

26-1928

### 6mm Elbow Connector.

---

25-4047

### 50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

---

25-4117

**70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.**

---

25-4166

**38mm/1.5 Inch Base Adaptor for 50mm Cells.**

---

25-4168

**50mm Base Adapter for 50mm Cells.**

---

25-4174

**50mm Base Adaptors for 70mm Cells.**

---

25-4176

**70mm Base Adaptor for 70mm Cells.**

---

25-4290

**Membrane Placing Tool 35mm/38mm.**

---

25-5100

**Suction Membrane Device 38mm/1.5 Inch Diameter.**

---

25-5120

**Two-Way Split Former 38mm/1.5 Inch Diameter.**

---

25-5130

**Two Part Split Mould 38mm**

---

70-1750

**Pair of Permeability End Caps Nx. Supplied with Distance Block.**

---

25-5050

**Pressure Pad 38mm/1.5 Inch Diameter.**

---

25-5061

**Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.**

---

25-5081

**Membrane Sealing Ring 1.5"**

---

25-5181

**Porous Disc 38mm/1.5 inch Diameter. Pack of 2.**

---

25-5200

**Filter Paper Drain 38mm/1.5 inch Diameter. Pack of 50.**

---

25-5470

**Membrane Placing Tool 50mm Diameter.**

---

25-5480

**Suction Membrane Device 50mm Diameter.**

---

25-5500

**Two-Way Split Former 50mm Diameter.**

---

25-5530

**Two Part Split Mould 50mm**

---

25-4520

**Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.**

---

25-5430

**Pressure Pad 50mm Diameter.**

---



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)

Product Group: [Base Pedestals, Specimen Base Adaptors](#)

100 mm Base Adaptor with Twin Pore Pressure Ports for 100 mm Triaxial Cell.

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

## Accessories



### 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



### 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



### 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

---

### Alternatives



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)





## Piston Restraint Clamp for Ele Triaxial Cells

Code: [25-4200](#)

Product Group: [Aggressive Materials, General Cell Accessories](#)

For ELE Triaxial Cells Manufactured From July 1996.

### Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

### Further Information

To lock the loading piston into position



## Pressure Pad 100mm Diameter.

Code: [25-7590](#)

Product Group: [Specimen Caps, Pressure Pads](#)

100 mm diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



## Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297, ASTM D5084



## Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

100Mm/4 Inch Diameter Membrane Placing Tool.

## Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297, ASTM D5084

## Accessories



## Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)



## Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)

## Alternatives



## Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)



## Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)



## Rubber Membrane 100mm/4 Inch Diameter. Pack of 10

Code: [25-7621](#)

Product Group: [Rubber Membranes](#), [Rubber Membranes](#), [Tri-Flex 2 Permeability Test Cell](#)

100 mm/4 Inch diameter rubber membrane (pack of 10).

## Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

## Accessories



### 1.4" (35 mm) Rubber Membranes


Code: [25-4261](#)



### Rubber Membrane 70mm/2.8 Inch Diameter. Pack of 10.

Code: [25-6441](#)

## Alternatives



### 1.4" (35 mm) Rubber Membranes

Code: [25-4261](#)



### Rubber Membrane 70mm/2.8 Inch Diameter. Pack of 10.

Code: [25-6441](#)



## Membrane Sealing Ring 100mm Diameter. Pack of 10.

Code: [25-7631](#)


Product Group: [Membrane Sealing Rings, Sealing Rings, Tri-Flex 2 Permeability Test Cell](#)

100 mm diameter membrane sealing ring (Pack Of 10).

## Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297

## Accessories



### 1.4" (35 mm) Sealing Rings

Code: [25-4281](#)



### Membrane Sealing Ring 70mm Diameter Pack of 10.

Code: [25-6461](#)



### Membrane Sealing Rings 2.8"

Code: [25-6641](#)

## Alternatives



## 1.4" (35 mm) Sealing Rings

Code: [25-4281](#)



## Membrane Sealing Ring 70mm Diameter Pack of 10.

Code: [25-6461](#)



## Membrane Sealing Rings 2.8"

Code: [25-6641](#)



## Suction Membrane Device 100mm/4 Inch Diameter.

Code: [25-7640](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

100Mm/4 Inch Diameter Suction Membrane Device.

## Accessories



### 1.4" Suction Membrane Device


Code: [25-4300](#)



### Suction Membrane Device 70mm Diameter.

Code: [25-6480](#)

## Alternatives



### 1.4" Suction Membrane Device

Code: [25-4300](#)



## Suction Membrane Device 70mm Diameter.

Code: [25-6480](#)





## Two-Way Split Former 100mm Diameter.

Code: [25-7650](#)


Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

### Accessories



#### 1.4" Two-Way Split Formers

Code: [25-4320](#)



#### 2.8" Two-Way Split Formers

Code: [25-6680](#)



#### Two-Way Split Former 70mm Diameter.

Code: [25-6500](#)

### Alternatives



## 1.4" Two-Way Split Formers

Code: [25-4320](#)



## 2.8" Two-Way Split Formers

Code: [25-6680](#)



## Two-Way Split Former 70mm Diameter.

Code: [25-6500](#)



## Porous Disc 100mm Diameter Pack of 2.

Code: [25-7661](#)


Product Group: [Accessories for CU/CU effective stress, Porous Stones, Tri-Flex 2 Permeability Test Cell](#)

100 mm diameter porous disc (Pack of 2).

## Standards


ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

## Accessories




### 1.4" Porous Stones

Code: [25-4461](#)




### 4.0" Porous Stones

Code: [25-7761](#)



### Porous Disc 70mm Diameter Pack of 2.

Code: [25-6561](#)



### Porous Stones 2.8"

Code: [25-6721](#)

## Alternatives



## 1.4" Porous Stones

Code: [25-4461](#)


---



## 4.0" Porous Stones

Code: [25-7761](#)


---



## Porous Disc 70mm Diameter Pack of 2.

Code: [25-6561](#)

---



## Porous Stones 2.8"

Code: [25-6721](#)



## Filter Paper Drain 100mm/4 inch Diameter. Pack of 50.

Code: [25-7670](#)

Product Group: [Accessories for CU/CU effective stress, Filter Paper Drains](#)

Filter paper drain 100 mm diameter (Pack of 50).

## Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297

## Accessories



### 1.4" Filter Paper Drains

Code: [25-4880](#)



### Filter Paper Drain 70mm/2.8 inch Diameter. Pack of 50.

Code: [25-6580](#)

## Alternatives



### 1.4" Filter Paper Drains

Code: [25-4880](#)



## Filter Paper Drain 70mm/2.8 inch Diameter. Pack of 50.

Code: [25-6580](#)



## Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

Code: 26-1746

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

With transparent plastic chamber for operating continuously at pressures up to 1000 kPa. A length of tubing is provided for connecting the air/water cylinder outlet to a pressure measuring system.

- Used to supply hydraulic pressure from a pneumatic pressure source.
- Prevents air entering the hydraulic pressure system.
- Maximum working pressure 1000kpa.
- Supplied with connectors and tubing for fitting to pressure measuring systems.

## Accessories



### Nylon Tubing 30 Metre Length.


Code: 26-1769

## Spares/Consumables



### Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.


Code: 26-1760



### Replacement Bladder Wide Neck (38mm Id)

Code: 26-1746/10



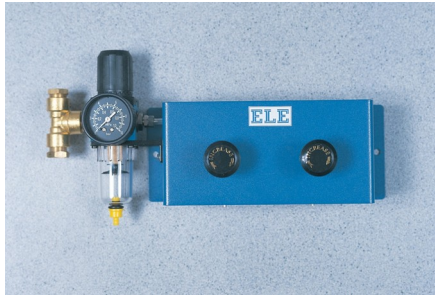

## **Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.**

Code: **26-1760**

Product Group: **Air/Water Pressure Systems - up to  
1000 kPa**

Comprising two constant pressure reducing valves with inlet water trap and pressure indicator. The unit allows a maximum output pressure of 1000 kPa. Maximum input pressure should not exceed 1400 kPa. The panel has an inlet connector to accept Nylon tubing from the air compressor and two 6 mm outlets for connecting Bladdertype Air/Water Pressure Assemblies. An outlet connector is fitted for the connection of an additional panel using Nylon tubing to increase the total capacity of the system. This outlet is blanked off when not required.



## Nylon Tubing 30 Metre Length.


Code: [26-1769](#)

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

30 metre length. For pressures up to 1700 kPa. Used for connecting Air Compressors to Pneumatic Pressure Reducing Panels, or for connecting two Pressure Reducing Panels together.

## Further Information

Nylon tubing 30 metres with pressure fittings.

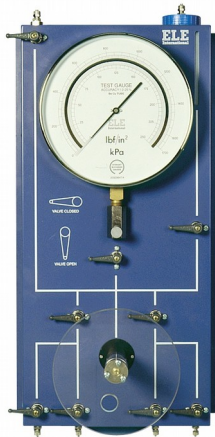


## Universal Pump and Pressure Indicating Panel 1700Kpa.

Code: [26-1880](#)

Product Group: [Modular Pressure Panel System](#)

This is the main pressure display in the system for monitoring various pressures and also provides fine control of the pressure within the system using the rotary hand pump. The unit is fitted with a dual calibrated 250 mm diameter pressure gauge, four inlet/outlet no-volume change valves, screw controlled rotary hand pump, water reservoir and isolating valves. The unit is housed in a hinged case for wall or bench mounting. By using an isolating valve the panel may be used to monitor cell or back pressure. 1700 kPa and 250 lbf/in<sup>2</sup>.

## Spares/Consumables



### Pressure Gauge 1700Kpa (250Psi) 250mm Diameter.

Code: [26-1865/10](#)



## Nylon Tubing 6mm Od 3500Kpa.

Code: [26-1926](#)

Product Group: [Permeability of Rock, Volume Change Measurement](#)

6 mm outside diameter x 4 mm inside diameter. For use up to a pressure of 3500 kPa. Priced per metre.



## Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)

Product Group: [Load Measurement](#), [Load Measurement](#), [Submersible Load Transducers](#)

Required when using submersible load cells.

## Accessories



### Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)



### Submersible Load Transducer Assembly 5kN Capacity In Compression.

Code: [27-1573](#)

## Alternatives



### Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)



## Submersible Load Transducer Assembly 5kN Capacity In Compression.

Code: [27-1573](#)



## GDU 8 Channel Data Acquisition Unit 220-240 V 50/60 Hz, 1 Ph.

Code: 27-1500/01

Product Group: Data Logging with the GDU, Geotechnical Data Acquisition Unit (GDU), Automatic Data Acquisition - CBR, Automatic Data Acquisition - Triaxial, Automatic Data Acquisition - Consolidation, Automatic Data Acquisition - Direct Shear

The GDU is a stand-alone, multi-tasking, multi-channel data logger, that is reliable and powerful, enabling it to co-ordinate test data from the range of ELE transducers required for various test methods.

The ELE Geotechnical Software package (DS7.1 and following), in conjunction with the GDU and a range of transducers, are the two central components required to create a modern turnkey soil testing system. Being fully modular it can be adapted to a wide range of soil testing laboratory configurations.

- For performing CBR, Consolidation, Direct/Residual Shear and Total & Effective Stress Triaxial tests
- 8 Channels expandable to 32 for performing multiple, concurrent tests for cost savings
- Independent signal conditioning on each channel to maintain data accuracy
- Field-upgradeable software, meaning no downtime for future software and functionality upgrades
- PC link via RS232 (DS7.1 only), or RS232 and Ethernet P2P/LAN (with DS7.2 and following)

- Extended warranty

## Specification

Case	Aluminum, free standing; houses power supply, analog to digital conversion module and an 8-channel analog input module with transducer energization.
Sockets	Standard 5-pin DIN type.
Input Range	$\pm 5$ volts to $\pm 10$ mV full scale.
Transducer Supply	10vDC.
Dimensions	12.8" w. x 14.3" d. x 6.1" h. (325 x 363 x 155 mm).
Weight	Net 14.08 lbs. (6.4 kg).

## Accessories





## 8-Channel Expansion Analog Input Module

Code: [27-1505](#)



## USB to Serial Adapter

Code: [27-1701](#)

### Alternatives



## GDU 8 Channel Data Acquisition Unit 100-120 V 60 Hz

Code: [27-1500/02](#)



## RS232/USB Cable, GDU

Code: [27-1510](#)



## Submersible Load Transducer Assembly 10kN Capacity In Compression.

Code: [27-1575](#)

Product Group: [Load Measurement, Load Measurement](#)

- Eliminates effects of piston friction on readings
- Unaffected by cell confining pressures
- Easily installed in triaxial cell
- Supplied complete with calibration certificate and 5-pin DIN type connector for use with GDU

Submersible Load Transducers are used to measure accurately the axial loads applied to triaxial test specimens. Consisting of a load cell and piston assembly these units replace the standard triaxial cell loading piston. A major advantage is that these transducers measure loads directly on top of the specimen. All transducers are supplied complete with a 5-pin DIN type connector and calibration certificate.

## Specification

Dimensions	76 x 50 mm (dia x h) excluding piston and adaptor
Overload capacity	150%
Output	27 mv full range
Excitation	11 V DC (15 V DC max)
Non-linearity	0.1% maximum
Hysteresis Deflection	0.1% maximum 0.05 mm at full load
Side force	50% full scale maximum without effect
Connector	5-pin DIN plug
Compensated temperature range	1 to 50°C
Weight g	850

## Accessories



## Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)



## Submersible Load Transducer Assembly 5kN Capacity In Compression.

Code: [27-1573](#)

---

### Alternatives



## Distance Piece Stainless Steel for Use with Submersible Load Cells and Axial Strain Transducers.

Code: [27-1293](#)



## Submersible Load Transducer Assembly 5kN Capacity In Compression.

Code: [27-1573](#)



## Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1617](#)

Product Group: [Axial Displacement](#), [Axial Displacement](#), [Displacement Transducers](#)

0 to 50 mm range. For use with Triaxial Cells.

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

## Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	10V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45

## Accessories



## Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



## Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)

---

### Spares/Consumables



## CBR Displacement Transducer

Code: [27-1706](#)

---

### Alternatives



## Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



## Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)



## Pressure Transducer Assembly 1700Kpa Fitted with 5 Pin DIN Plug.


Code: 27-1633

Product Group: [Pressure Measurement](#), [Tri-Flex 2 One-Cell Permeability Test System](#), [Pressure Transducer](#)

Pressure Transducers are used to measure the cell, pore and back pressures during triaxial testing. Assemblies are supplied complete with a de-airing block, valve, 5-pin DIN plug connector and calibration certificate

## Specification

Construction	Stainless Steel
Excitation	10 V DC
Output	143 mV full range
Thread	1/4" BSP

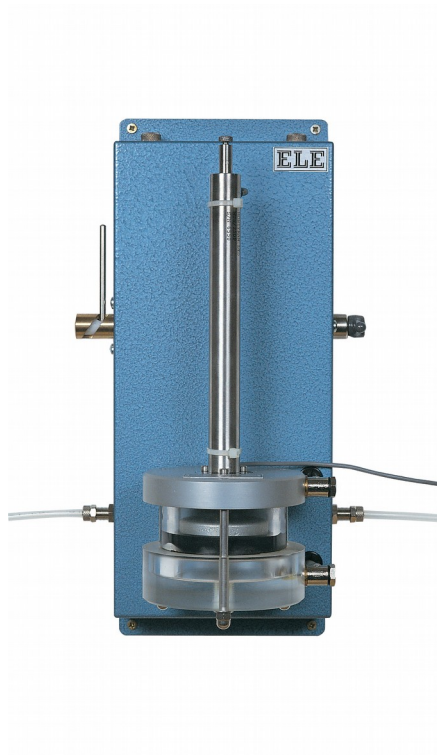

## Volume Change Transducer Assembly 80ml Capacity Maximum Working Pressure 1700KPa

Code: 27-1641

Product Group: [Volume Change Measurement](#),  
[Tri-Flex 2 One-Cell Permeability Test System](#), [Volume Change Measurement](#), [Volume Change Transducer](#)

- Reversing valves to increase capacity
- Steel case for wall mounting and access to piping
- Supplied complete with calibration certificate

The Volume Change Transducer provides continuous measurements of volume change during the triaxial test. The assembly includes a valve to reverse the flow through the unit, providing increased capacity.

### Specification

Maximum Pressure	250 psi (1,700 kPa).
Excitation	10V DC.
Output	1.25 Volts full range.
Capacity	80 cc x 0.1 cc sensitivity.
Case	Steel; hinged for access to piping.
Connector	5-Pin DIN type.
Overall Dimensions	9" w. x 7" d. x 14 -1/2" h. (229 x 178 x 368 mm).
Weight	Net 11 lbs. (5 kg).





## DS7.2 Undrained Triaxial Shear Strength Program for Windows 7, 32/64 bit

Code: [27-1753](#)

Product Group: [DS7](#), [DS7.2 Quick Undrained Triaxial Software](#), [Automatic Data Acquisition - Triaxial](#)

- Options for single or multi-stage testing on a sample
- Mohr circles produced for graphical analysis

Options are available for a single test on one sample, standard three-sample procedure with linking of the results, or for a multi-stage test on one sample. Load and strain are monitored through transducers. Various printouts and graphical plots are available including basic sample data, moisture content and density. The program tabulates shearing data and plots stress against strain. Mohr circles are produced for graphical analyses.



## DS7.2 CU/CD Triaxial Shear Strength Program for Windows 7, 32/64 bit

Code: [27-1763](#)

Product Group: [DS7, DS7.2 CU/CD Effective Stress Triaxial Software](#)

- Complete package for consolidated drained and consolidated undrained triaxial tests

This advanced package includes procedures for consolidated drained and consolidated undrained tests. Standard options are available for saturation, consolidation and shearing with automatic monitoring of the various parameters through transducers linked to the system. Load, strain, volume-change, pore-pressure, cell pressure and back pressure can all be monitored. Various prints and graphical plots are available to the engineer and include saturation data such as pore pressure build-up and B values, consolidation, volume change against time, shearing load versus strain with pore pressure monitoring.



## Air Compressor

Code: 83-1730/01

Product Group: Air Compressors, Air/Water Pressure Systems - up to 1000 kPa

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Specification

Dimensions (l x w x h)	483 x 457 x 864 mm
Free air delivery	2.0 cfm
Receiver capacity	50 litres
Maximum pressure	1000 kPa
Continuous working pressure	700 kPa
Electrical supply	220 – 240 V AC 1 ph 50 Hz
Water Trap	No
Weight	57 kg



## 6mm T Connector.

Code: [26-1930](#)

Product Group: [Volume Change Measurement](#)



## 6mm Elbow Connector.

Code: [26-1928](#)

Product Group: [Volume Change Measurement](#)



## 50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: 25-4047

Product Group: Triaxial Cell, Triaxial Cells

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

## Specification

Cell size	50 mm
Max specimen size	50 x 100 mm
Working pressure	1700 kPa
Max piston load	45 kN
Vertical clearance required	380 mm
Horizontal clearance required	155 mm
Weight kg	4

## Accessories



### 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



### 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



### Pressure Interface Chamber

Code: [25-0695](#)

## Alternatives



### 100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4157](#)



### 70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4117](#)



## 70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4117](#)

Product Group: [Triaxial Cell](#), [Triaxial Cells](#)

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

## Standards

BS 1377, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297

## Specification

Cell size	70 mm
Max specimen size	70 x 140 mm
Working pressure	1701 kPa
Max piston load	46 kN
Vertical clearance required	430 mm
Horizontal clearance required	180 mm
Weight kg	7.3
Maximum Working Pressure	25 0 psi (1,700 kPa).
Maximum Piston Load	10,100 lbf. (45 kN).




# Product Sheet

www.ele.com  
+44 (0) 01525 249 200



Maximum Specimen Size	2.8" (70 mm) diam. x 5.6" (140 mm) l.
Required Clearance	17" (430 mm) vertical; 7.1" (180 mm) horizontal.
Weights	Net 16 lbs. (7.3 kg).

## Accessories




### 1.4" Base Pedestal

Code: [25-4170](#)



### 1.4" Specimen Cap

Code: [25-4250](#)



### 2.8" Base Pedestal

Code: [25-4178](#)



### 2.8" Specimen Cap

Code: [25-6630](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)



## Digital Pressure Gauge 1700Kpa. for Ele Triaxial Cells.

Code: [27-1620](#)



## Drainage Line for 25-4250

Code: [25-5050/10](#)



## Drainage Line for 25-6430

Code: [25-6430/10](#)



## High Vacuum Grease

Code: [88-3115](#)



## Piston Restraint Clamp for Ele Triaxial Cells

Code: [25-4200](#)



## Pressure Interface Chamber

Code: [25-0695](#)



## Pressure Pad 70mm Diameter.

Code: [25-6430](#)



## Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.

Code: [25-4520](#)

## Alternatives



## 100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4157](#)



## 4" Triaxial Cell

Code: [25-4159](#)



## 50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4047](#)



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)

Product Group: [Specimen Base Adaptors, Base Pedestals](#)

38mm/1.5 Inch Base Adaptor with Twin Pore Pressure Ports for 50mm Cells.

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

## Accessories



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

## Alternatives



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)

Product Group: [Base Pedestals, Specimen Base Adaptors](#)

50mm Base Adapter with Twin Pore Pressure Ports for 50mm Cells.

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

## Accessories



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

## Alternatives



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)





## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)


Product Group: [Base Pedestals, Specimen Base Adaptors](#)

50mm Base Adaptor with Twin Pore Pressure Ports for 70mm Cells.

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

## Accessories



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

### Alternatives



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

Product Group: [Base Pedestals, Specimen Base Adaptors](#)

70mm Base Adaptor with Twin Pore Pressure Ports for 70mm Cells.

## Standards


BS 1377, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297

## Accessories



### 1.4" Base Pedestal

Code: [25-4170](#)



### 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



### 2.8" Base Pedestal

Code: [25-4178](#)



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)

## Alternatives



## 1.4" Base Pedestal

Code: [25-4170](#)



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 2.8" Base Pedestal

Code: [25-4178](#)



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

Membrane Placing Tool For 35Mm/1.4 Inch And 38Mm/1.5 Inch Samples.

## Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

## Accessories



## Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



## Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)

## Alternatives



## Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



## Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)



## Suction Membrane Device 38mm/1.5 Inch Diameter.

Code: [25-5100](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

Suction Membrane Device For 38Mm/1.5 Inch Samples.




## Two-Way Split Former 38mm/1.5 Inch Diameter.

Code: [25-5120](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

Two-Way Split Former For 38Mm/1.5 Inch Samples.



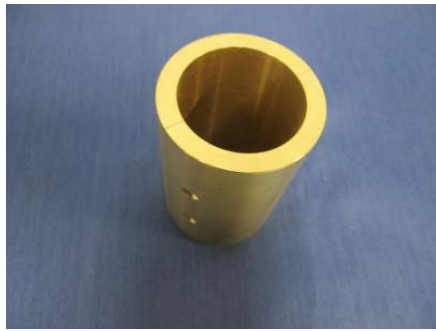

## Two Part Split Mould 38mm

Code: [25-5130](#)

Product Group: [Two-way Split Moulds](#), [Two-Part Split Mould](#)



## Pair of Permeability End Caps Nx. Supplied with Distance Block.

Code: [70-1750](#)

Product Group: [Permeability of Rock](#)

Permeability end caps used with ELE-Hoek Cells and constant pressure systems are a cost-effective solution suited to investigating the permeability of rock at high confining pressures in the laboratory.

To collect and measure the water which permeates through the rock specimen, a suitable burette such as 25-4540 is recommended. Each permeability end cap incorporates a tubing connector which accepts standard 6 mm tubing, 26-1926, used to connect the cell to the pressure system and burette.

## Accessories



## Nylon Tubing 6mm Od 3500Kpa.

Code: [26-1926](#)

## Alternatives



## ELE-Hoek Cell ADR Touch 2000 Compression Machine. 220 - 240 V 50/60H z

Code: [70-2630/01](#)



## ELE-Hoek Cell Nx 54.74mm Diameter.

Code: [70-1710](#)



## Hand Operated Pressure System. Complete with Pressure Gauge and Flexible Hose.

Code: [70-5000](#)



## Pressure Test 3500 Oil/Water Constant Pressure System with Digital Pressure Gauge.

Code: [70-5130/01](#)

## Pressure Pad 38mm/1.5 Inch Diameter.

Code: [25-5050](#)

Product Group: [Pressure Pads](#)

38 mm / 1.5 Inch diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



## Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297



## Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.

Code: [25-5061](#)

Product Group: [Rubber Membranes](#)

Rubber Membrane For 38Mm/1.5 Inch Samples  
(Pack Of 10).

### Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



## Membrane Sealing Ring 1.5"

Code: [25-5081](#)

Product Group: [Sealing Rings](#)

Membrane Sealing Ring 38Mm Diameter (Pack Of 10).



## Porous Disc 38mm/1.5 inch Diameter. Pack of 2.

Code: [25-5181](#)

Product Group: [Accessories for CU/CU effective stress, Porous Stones](#)

Porous disc for 38 mm/1.5 inch samples (Pack of 2).



## **Filter Paper Drain 38mm/1.5 inch Diameter. Pack of 50.**

Code: [25-5200](#)

Product Group: [Accessories for CU/CU effective stress, Filter Paper Drains](#)

Filter paper drain 38 mm diameter (Pack of 50).





## Membrane Placing Tool 50mm Diameter.

Code: [25-5470](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

50 mm Diameter Membrane Placing Tool.

## Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181



## Suction Membrane Device 50mm Diameter.

Code: [25-5480](#)

Product Group: [Suction Membrane Devices](#), [Suction Membrane Device](#)

50 mm Diameter Suction Membrane Device.



## Two-Way Split Former 50mm Diameter.

Code: [25-5500](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

50 mm Diameter Two-Way Split Former.



## Two Part Split Mould 50mm

Code: [25-5530](#)

Product Group: [Two-way Split Moulds](#), [Two-Part Split Mould](#)



## Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.

Code: [25-4520](#)

Product Group: [Accessories for CU/CU effective stress, General Cell Accessories](#)

### Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297

## Pressure Pad 50mm Diameter.

Code: [25-5430](#)

Product Group: [Specimen Caps, Pressure Pads](#)

50 mm diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



## Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181