



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

Contents

www.ele.com
+44 (0) 01525 249 200



This wishlist was generated on 27/07/2017, and contains the following Products:

47-0455/01

Vibrating Hammer

47-0480

300 mm Shank

24-9066

ASTM Compaction Mould 152mm.

81-4160

Sample Tray - 910 x 910 x 76 mm

78-7090

Harvard Trip Balance

78-7110

Weights for Harvard Trip Balance

79-2595

300mm Dia BS Sieve 20.0mm Perforated Plate.

81-0521

Stopwatch

78-1225/01

100 Litre Drying Oven

81-2979

Moisture Content Tin

24-0545/01

Semi-Automatic Cone Penetrometer

24-0546

Test Gauge for Checking Condition of Cone Point.

24-0548

Penetration Test Cup.

81-3040

Sample Container - Tinned Steel 2.5 litres

81-4700

Sample Tray - 305 mm Diameter x 50 mm

29-4140

Metal Tray 300mm Sq X 40mm deep with a 150mm dia hole.

29-4240

Metal Tray 500mm Sq X 50mm deep with a 200mm dia hole.

29-4100

150mm Sand Pouring Cylinder.

29-4200

200mm Sand Pouring Cylinder.

29-5060

Density Chisel.

29-5020

Soft Headed Mallet.

29-5080

Metal Dibber Tool

29-4120

150mm Calibrating Container 150mm Id X deep with 250mm dia rim.

29-4220

200mm Calibrating Container 200mm Id X 250mm deep with a 350mm dia rim.

24-9260

Swell Plate

24-9245

5 Lb. Annular Surcharge Weight ASTM.

23-4250

Cbr/Core Cutter Extruder Frame and Hydraulic Jack Extrudes 150mm/6 Inch Diameter Specimens.

23-4300

Adaptor Plate for 23-4250 to Extrude 100mm/4 Inch Diameter and Marshall Specimens.

24-9095/01

Automatic Soils Compactor ASTM 220-240V 50Hz 1Ph.

24-9060

Proctor Mould

24-9150/01

Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

78-0460

Clamped Boss Load Ring - 10.0 kN

78-0760

Clamped Boss Load Ring - 28.0 kN

78-0860

50kN Clamped Boss Load Ring

24-9010

Straight Edge 300mm.

24-9063

ASTM Compaction Rammer 2.5Kg.

24-9070

ASTM/Modified Proctor Compaction Rammer 4.5Kg.

24-9188

Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

24-9228

ASTM Cbr Mould Complete with Collar & Perforated Base

24-9238

ASTM Spacing Disc.

24-9240

Filter Screen 150mm Dia with 0.15mm Mesh.

24-9243

4.5Kg Annular Surcharge Weight ASTM.

Contents

www.ele.com
+44 (0) 01525 249 200



24-9244

5Lb (2.27Kg) Split Surcharge Weight.

24-9250

Filter Paper Equivalent to Whatman No 5 150mm Dia Box of 100.



Vibrating Hammer

Code: [47-0455/01](#)

Product Group: [Percentage Refusal Density \(PRD\)](#)

Accessory - suitable for compacting asphalt samples.

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



250 Asphalt Probe

Code: [47-0202/10](#)



300 mm Shank

Code: [47-0480](#)



Cradle

Code: [34-8105](#)



Engineer's Steel Rule

Code: [81-0805](#)



Filter Paper - Medium

Code: [82-7901](#)



Paraffin Wax

Code: [82-7031](#)



Spatula 200 mm

Code: [81-0140](#)



Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

Code: [81-0590](#)

Alternatives



250 Asphalt Probe

Code: [47-0202/10](#)



300 mm Shank

Code: [47-0480](#)



Cradle

Code: [34-8105](#)



Engineer's Steel Rule

Code: [81-0805](#)



Filter Paper - Medium

Code: [82-7901](#)



Paraffin Wax

Code: [82-7031](#)



Spatula 200 mm

Code: [81-0140](#)



Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

Code: [81-0590](#)



300 mm Shank

Code: [47-0480](#)

Product Group: [Percentage Refusal Density \(PRD\)](#)

Complete with tamping feet - 102 mm and 146 mm dia.

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Vibrating Hammer

Code: [47-0455/01](#)

Alternatives



Vibrating Hammer

Code: [47-0455/01](#)



ASTM Compaction Mould 152mm.

Code: 24-9066

Product Group: Accessories for ASTM and Proctor compaction, ASTM/Modified Proctor compaction


152mm inside diameter

Standards

ASTM D698, ASTM D1557, AASHTO T99, AASHTO T180

Specification

Dimensions	152.4 mm dia x 116.4 mm high
Rammer Mould Volume	1/13.33 ft ³
Construction	All steel, threaded studs with wing nuts, plated.
Weight	8.2 kg

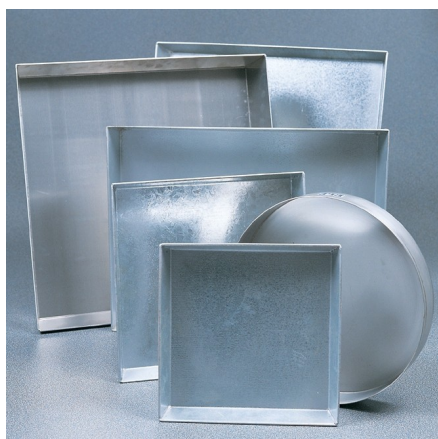

Sample Tray - 910 x 910 x 76 mm

Code: [81-4160](#)

Product Group: [Sample Trays](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Harvard Trip Balance

Code: [78-7090](#)

Product Group: [Mechanical Balances, Harvard](#)
[Mechanical Trip Balance](#)

Further Information

****Not available for sale in the USA****

Specification


Capacity	2000 g
Resolution	0.1 g
Pan size (diameter)	2 x 150 mm
Overall dimensions (l x w x h)	152 x 356 x 254 mm
Weight	2.7 kg

Accessories

ASTM Initial Set Needle

Code: [38-2620](#)





ASTM Vicat Mould

Code: [38-2660](#)



EN Initial and Final Set Needle

Code: [38-2110](#)



Plastic Scoop and Counterweight

Code: [78-7130](#)



Triple Beam Balance

Code: [78-7140](#)



Weights for Harvard Trip Balance

Code: [78-7110](#)

Spares/Consumables



Consistency Plunger


Code: [38-2010/10](#)

Alternatives



ASTM Initial Set Needle

Code: [38-2620](#)



ASTM Vicat Mould

Code: [38-2660](#)



EN Initial and Final Set Needle

Code: [38-2110](#)



Plastic Scoop and Counterweight

Code: [78-7130](#)



Triple Beam Balance

Code: [78-7140](#)



Weights for Harvard Trip Balance

Code: [78-7110](#)



Weights for Harvard Trip Balance

Code: [78-7110](#)

Product Group: [Mechanical Balances, Harvard Mechanical Trip Balance](#)

Standards

ASTM class 6

Further Information

****Not available for sale in the USA****

Accessories


ASTM Initial Set Needle

Code: [38-2620](#)



ASTM Vicat Mould

Code: [38-2660](#)



EN Initial and Final Set Needle

Code: [38-2110](#)



Harvard Trip Balance

Code: [78-7090](#)



Spares/Consumables

Consistency Plunger

Code: [38-2010/10](#)




Alternatives

ASTM Initial Set Needle

Code: [38-2620](#)





ASTM Vicat Mould

Code: [38-2660](#)



EN Initial and Final Set Needle

Code: [38-2110](#)



Harvard Trip Balance

Code: [78-7090](#)



300mm Dia BS Sieve 20.0mm Perforated Plate.

Code: 79-2595

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

NOT AVAILABLE FOR SALE IN THE USA



Stopwatch

Code: [81-0521](#)

Product Group: [Watches and Clocks](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (mm)

64 x 53 x 19



100 Litre Drying Oven

Code: [78-1225/01](#)

Product Group: [Oven Drying Method](#), [Oven Drying Method](#), [Oven Drying Method](#)

Standards

BS 2648, BS 598, BS 1377, BS 1924

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Alternatives



150 Litre Drying Oven

Code: [78-1235/01](#)



225 Litre Drying Oven

Code: [78-1250/01](#)



425 Litre Drying Oven

Code: [78-0135/01](#)



50 Litre Drying Oven

Code: [78-1215/01](#)



Moisture Content Tin

Code: [81-2979](#)

Product Group: [Moisture Content Tin and Sample Containers](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Semi-Automatic Cone Penetrometer

Code: [24-0545/01](#)

Product Group: [Semi-Automatic Cone Penetrometer](#),
[Semi-Automatic Cone Penetrometer](#)

Bench mounted apparatus to determine the liquid limit of soils to BS1377. This method is applicable to a wide range of soils. The apparatus is fitted with a 150mm diameter dial indicator for direct reading of penetration. Supplied complete with 30deg, 30mm long test cone. Manufactured from stainless steel and includes adjustable levelling feet.

Incorporates Digital Automatic controller, which releases the plunger head and ensures free falling of the penetration device during the test. The time set is displayed by a bright easy to read display.

Standards

BS 1377, BS 1924-2, EN 1997-2

Specification

Dial Indicator	150 mm diameter graduated in 400 x 0.1 mm divisions. Indicator incorporates a friction/gear system.
Height	Adjustable using rapid integral clamping mechanism.
Cone Release Cone	Semi-Automatic 1 x 30°, 35 mm test cone included.
Base	Cast aluminum with adjustable leveling feet.
Weight	Net 19 lbs. (8.64 kg).

Accessories



Penetration Test Cup.

Code: [24-0548](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)


Spares/Consumables



Penetration Test Cone

Code: [24-0544](#)

Alternatives



Cone Penetrometer. Complete with Stainless Steel Test Cone.

Code: [24-0540](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)

Product Group: [Cone Penetrometer Method](#), [Cone Penetrometer](#)

55 mm diameter by 40 mm deep, with the rim parallel to the flat base.

Standards

BS 1377-2



Penetration Test Cup.

Code: [24-0548](#)

Product Group: [Cone Penetrometer](#), [Cone Penetrometer Method](#)

Brass construction, 55mm dia x 4mm depth to fit BS1377

Standards

BS 1377-2




Sample Container - Tinned Steel 2.5 litres

Code: [81-3040](#)

Product Group: [Moisture Content Tin and Sample Containers](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

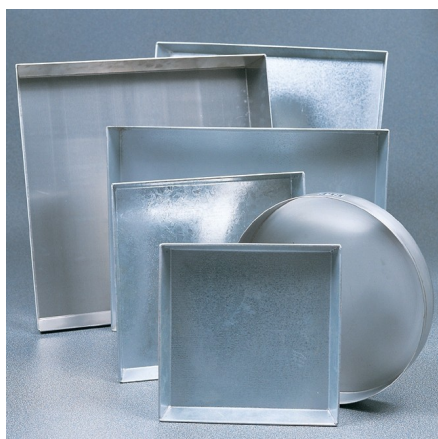

Sample Tray - 305 mm Diameter x 50 mm

Code: [81-4700](#)

Product Group: [Sample Trays](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Metal Tray 300mm Sq X 40mm deep with a 150mm dia hole.

Code: [29-4140](#)

Product Group: [Sand Replacement](#)

Standards

BS 1377, BS 1924



Metal Tray 500mm Sq X 50mm deep with a 200mm dia hole.

Code: [29-4240](#)

Product Group: [Sand Replacement](#)

Standards

BS 1377, BS 1924



150mm Sand Pouring Cylinder.

Code: [29-4100](#)

Product Group: [Sand Replacement](#)

Standards

BS 1377, BS 1924



200mm Sand Pouring Cylinder.

Code: [29-4200](#)

Product Group: [Sand Replacement](#)

Standards

BS 1377, BS 1924



Density Chisel.

Code: [29-5060](#)

Product Group: [Field density tools](#)

With hardened tip



Soft Headed Mallet.

Code: [29-5020](#)

Product Group: [Field density tools](#)



Metal Dibber Tool

Code: [29-5080](#)

Product Group: [Field density tools](#)

For excavating hole



150mm Calibrating Container 150mm Id X deep with 250mm dia rim.

Code: [29-4120](#)

Product Group: [Sand Replacement](#)

Standards

BS 1377, BS 1924



200mm Calibrating Container 200mm Id X 250mm deep with a 350mm dia rim.

Code: [29-4220](#)

Product Group: [Sand Replacement](#)

Standards

BS 1377, BS 1924



Swell Plate

Code: [24-9260](#)

Product Group: [Expansion \(swell\) Test Equipment, Swell Plate](#)

With adjustable stem.

Standards

ASTM D1883, AASHTO T193

Specification

Base Plate	5 15/16" diam. (150.8mm); perforated.
Contact Head	Adjustable; locks on stem with knurled nut.
Construction	Aluminium
Weight	Net 2-1/2 lbs. (1.1 kg).



5 Lb. Annular Surcharge Weight ASTM.

Code: [24-9245](#)

Product Group: [ASTM/AASHTO CBR mould accessories, Surcharge Weights](#)

Specification

Construction

Machined steel.

Finish

Plated.

Accessories



5Lb (2.27Kg) Split Surcharge Weight.

Code: [24-9244](#)



ASTM Cbr Mould Complete with Collar & Perferated Base

Code: [24-9228](#)

Alternatives



5Lb (2.27Kg) Split Surcharge Weight.

Code: [24-9244](#)



ASTM Cbr Mould Complete with Collar & Perferated Base

Code: [24-9228](#)



Cbr/Core Cutter Extruder Frame and Hydraulic Jack Extrudes 150mm/6 Inch Diameter Specimens.

Code: [23-4250](#)

Product Group: [Soil Extruders](#)

Comprises a frame and hydraulic jack with adaptor plate supplied. Extrudes samples from BS CBR Mould and ASTM CBR Mould.

Standards

BS 1377-1

Accessories



Adaptor Plate for 23-4250 to Extrude 100mm/4 Inch Diameter and Marshall Specimens.

Code: [23-4300](#)

Alternatives



38mm Hand Operated Hydraulic Sample Extruder with Trimming Knife 38mm Split Former & Cutting Tool.

Code: [23-4090](#)



Proctor/Core Cutter Extruder Frame and Hydraulic Jack. Extrudes 100mm/4 Inch Diameter Specimens

Code: 23-4200



Adaptor Plate for 23-4250 to Extrude 100mm/4 Inch Diameter and Marshall Specimens.

Code: [23-4300](#)

Product Group: [Soil Extruders](#)

For use with 23-4250. Comprising an adaptor plate, retaining screws and a nominal 100 mm ram plunger. Enables extrusion from all ELE 100 mm moulds and core cutters listed in the table.

Standards

BS 1377-1

Further Information

Two extruders comprising a frame and hydraulic jack supplied with adaptor plates to enable a range of sample extrusion from all ELE moulds indicated in the table.



Automatic Soils Compactor ASTM 220-240V 50Hz 1Ph.

Code: [24-9095/01](#)

Product Group: [Automatic Compactors](#), [Automatic Soil Compactor](#)

Standards

ASTM D558, ASTM D559, ASTM D560, ASTM D698, ASTM D1557, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180, AASHTO T193

Specification

Hammer	Circular faced, 2.0" (50.8 mm) dia. foot; selectable to either 5.5 lb.(2.5 kg) or 10 lb. (4.5 kg) weight.
Drop	Adjustable to either 12 " (305 mm) or 18" (457 mm)
Controls	Digital counter system, selector switch for either standard proctor test or modified proctor/CBR testing.
Dimensions	10" w. x 17" d. x 55 " h. (250 x 430 x 1,400 mm).
Weight	Net 41.9 lbs. (190 kg).

Accessories



ASTM Compaction Mould 152mm.

Code: [24-9066](#)



Calibration Kit For Automatic Soil Compactor

Code: [24-9095/12](#)



Proctor Mould

Code: [24-9060](#)

Spares/Consumables



Lead Cylinders

Code: [24-9095/13](#)



Modified Compaction Mould

Code: [24-9098](#)



Standard Compaction Mould

Code: [24-9097](#)

Alternatives



Automatic Soil Compactor ASTM 110-120V 60Hz 1Ph

Code: [24-9095/02](#)



Automatic Soils Compactor ASTM 220-240V 60Hz 1Ph.

Code: [24-9095/06](#)



Proctor Mould

Code: [24-9060](#)

Product Group: [Accessories for ASTM and Proctor compaction](#), [Proctor compaction](#)

Standards

ASTM D558, ASTM D559, ASTM D560, ASTM D698, ASTM D1557, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180

Specification

Dimensions	101.6 mm dia x 116.4 mm high
Rammer Mould Volume	1/30 ft ³
Construction	All steel, threaded studs with wing nuts, plated.
Weight	5.4 kg



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/01](#)

Product Group: [CBR Load Frames](#)

- Single speed machine (BS/EN and ASTM)
- Rapid platen adjustment
- Complete with stabilising bar
- Compact, bench-mounting design
- Options for mechanical or electronic measurement

Designed for performing laboratory CBR tests to BS 1377, EN13286-47 and ASTM D1883, this bench mounting machine comprises a twin column frame incorporating a motorised drive system. Rapid adjustment of the platen is provided, which enables daylight to be taken up quickly and also close control of application of a seating load.

Standards

BS 1377, BS 1924, EN 13286-47, ASTM D1883, AASHTO T193

Specification

Dimensions (l x w x h)	550 x 400 x 1220 mm
Max vertical clearance	800 mm
Horizontal clearance	255 mm
Platen diameter	133 mm
Platen travel	105 mm
Weight kg	80

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



50kN S-type Load Cell

Code: [27-1559](#)



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)



BS Cbr Mould Body.

Code: [24-9198](#)



BS Extension Collar

Code: [24-9200](#)



BS Solid Base or Top Plate

Code: [24-9204](#)



Cbr Penetration Piston (Adjustable).

Code: [24-9183](#)



CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1705](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Penetration Dial Gauge BS

Code: [24-9186](#)



Penetration Piston

Code: [24-9182](#)



Penetration/Swell Dial Gauge ASTM.

Code: [24-9184](#)

Alternatives



CBR-Test 50 Machine 50 kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/02](#)



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/06](#)



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/01](#)



MultiPlex 50 Load Frame

Code: [25-3700/01](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)

Product Group: [Clamped Boss Load Rings](#), [Digital Tritest 50 Load Frame](#), [Proving Rings](#), [Force measurement](#)

Specification

Capacity: kN, kgf, lbf	10.0, 1000, 2250
Typical Design sensitivity: N/div, kgf/div, lbf/div	7.7, 0.77, 1.73
Overall height mm	248
Approx weight kg	4.6
Capacity	10 kN
Value of CBR	8% to 40%
Capacity - lbf	2,250
Capacity - kN	10
Capacity - kgf	1,000
Typical Design Sensitivity - lbf/div	1.73
Typical Design Sensitivity - kN/div	7.7
Typical Design Sensitivity - Kgf/div	0.77
Overall Height	9.76" (248 mm)
Approx Weight	10.1 lbs.(4.6 kg)

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Clamped Boss Load Ring - 28.0 kN

Code: 78-0760

Product Group: Clamped Boss Load Rings, Digital Tritest 50 Load Frame, Load Measurement, Proving Rings, CBR-Test 50 Machine, Conversion of In-situ to Laboratory CBR, Load Measurement, CBR Loading Press, Hand-Operated, Force measurement

Standards

BS 1377, BS 1924

Specification

Capacity: kN, kgf, lbf	28.0, 2800, 6000
Typical Design sensitivity: N/div, kgf/div, lbf/div	25.5, 2.54, 5.45
Overall height mm	248
Approx weight kg	5.4
Capacity	28 kN
Value of CBR	Average range of CBR
Capacity - lbf	6,000
Capacity - kN	28
Capacity - kgf	2,800
Typical Design Sensitivity - lbf/div	5.45
Typical Design Sensitivity - kN/div	25.5
Typical Design Sensitivity - Kgf/div	2.54
Overall Height	9.76" (248 mm)
Approx Weight	11 .9 lbs.(5.4 kg)

Accessories



50kN Clamped Boss Load Ring

Code: 78-0860



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 6,000 lbs (28.0 kN)

Code: [78-0764](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 6,000 lbs (28.0 kN)

Code: [78-0764](#)



50kN Clamped Boss Load Ring

Code: 78-0860

Product Group: Clamped Boss Load Rings, Digital Tritest 50 Load Frame, Load Measurement, Proving Rings, Accessories for the Marshall test, Accessories for the Marshall Test, CBR-Test 50 Machine, Load Measurement, CBR Loading Press, Hand-Operated, Force measurement

Calibrated in compression.

Standards

EN 12697-34

Specification

Capacity: kN, kgf, lbf	50.0, 5000, 11,200
Typical Design sensitivity: N/div, kgf/div, lbf/div	45.5, 4.54, 10.18
Overall height mm	248
Approx weight kg	7.9
Value of CBR	Above 40%
Capacity - kN	50
Capacity - kgf	5000
Capacity - lbf	11,200
Typical Design Sensitivity - kN/div	45.5
Typical Design Sensitivity - Kgf/div	4.54
Typical Design Sensitivity - lbf/div	10.18
Overall Height	9.76" (248 mm)
Approx Weight	17.4 lbs.(7.9 kg)

Accessories



Clamped Boss Load Ring - 10.0 kN

Code: 78-0460



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 11,200 lbs (50.0 kN)

Code: [78-0864](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)




Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 11,200 lbs (50.0 kN)

Code: [78-0864](#)

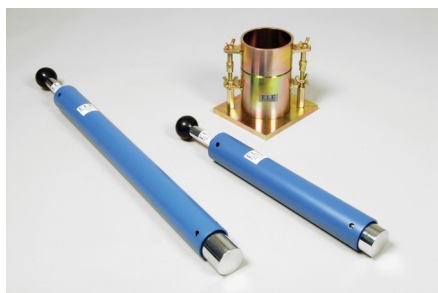

Straight Edge 300mm.

Code: [24-9010](#)

Product Group: [BS/EN compaction test 4.5kg, Proctor compaction, Straightedge](#)

300 mm

Standards

BS 1377-4, BS 1924-2, ASTM D698, ASTM D1557, AASHTO T99, EN 13286-2, EN 13286-4, ASTM D1883, AASHTO T193, ASTM D558, ASTM D559, ASTM D560, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180

Specification

Construction	Flat ground tool steel; beveled edge.
Dimensions	L x W x T (300mm x 40mm x 6mm).
Weight	550g

Accessories



ASTM Compaction Rammer 2.5Kg.

Code: [24-9063](#)

Alternatives



ASTM Compaction Rammer 2.5Kg.

Code: [24-9063](#)



ASTM Compaction Rammer 2.5Kg.

Code: [24-9063](#)

Product Group: [Proctor compaction](#), [Standard Compaction Hammer](#)

50.8mm diameter x 305mm deep.

Standards

ASTM D1557, AASHTO T180, ASTM D558, ASTM D559, ASTM D560, ASTM D698, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136

Specification


Hammer	2" diam. (50.8 mm); 5-1/2 lbs. (2.49 kg).
Drop	12 " (305 mm).
Guide Sleeve	Machined steel tubing with air pressure release holes
Finish	Corrosion resistant
Weight	4.1 kg (9 lbs)

Accessories



ASTM/Modified Proctor Compaction Rammer 4.5Kg.

Code: [24-9070](#)



Straight Edge 300mm.


Code: [24-9010](#)

Alternatives



ASTM/Modified Proctor Compaction Rammer 4.5Kg.

Code: [24-9070](#)



Straight Edge 300mm.

Code: [24-9010](#)



ASTM/Modified Proctor Compaction Rammer 4.5Kg.

Code: [24-9070](#)

Product Group: [ASTM/Modified Proctor compaction, Modified Compaction Hammer](#)

50.8mm diameter x 457.2 mm drop.

Standards

ASTM D1557, AASHTO T180

Specification

Hammer	2" diam. (50.8 mm); 10 lbs. (4.5 kg).
Drop	18" (457.2 mm).
Guide Sleeve	Machined steel tubing with integrally spun end cap; air pressure release holes.
Finish	Corrosion resistant
Weight	Net 6.3 kg (14 lbs)

Accessories



ASTM Compaction Rammer 2.5Kg.

Code: [24-9063](#)

Alternatives



ASTM Compaction Rammer 2.5Kg.

Code: [24-9063](#)



Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

Code: 24-9188

Product Group: [In-situ CBR](#), [Conversion of In-situ to Laboratory CBR](#), [Penetration Measurement](#)

Dual purpose mounting bracket for CBR penetration dial gauges. Allows gauge to be fixed to penetration piston or load ring.

Standards

BS 1377, BS 1924



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)

Product Group: [ASTM/AASHTO CBR mould](#)

With collar and perforated baseplate.

Standards

ASTM D1883, AASHTO T193

Specification

Mould	152.4 x 177.8 mm (inside diameter x height)
Collar	50.8 mm height, fits both ends of mould
Base plate	Perforated
Construction	All steel, plated
Weight kg	9

Accessories



4.5Kg Annular Surcharge Weight ASTM.

Code: [24-9243](#)



5 Lb. Annular Surcharge Weight ASTM.

Code: [24-9245](#)



ASTM Cutting Collar.

Code: [24-9236](#)



ASTM Spacing Disc.

Code: [24-9238](#)

Alternatives



4.5Kg Annular Surcharge Weight ASTM.

Code: [24-9243](#)



5 Lb. Annular Surcharge Weight ASTM.

Code: [24-9245](#)



ASTM Cutting Collar.

Code: [24-9236](#)



ASTM Spacing Disc.

Code: [24-9238](#)



ASTM Spacing Disc.

Code: [24-9238](#)

Product Group: [Spacer Discs, ASTM/AASHTO CBR mould accessories](#)

150.8 mm diameter x 61.4 mm deep.

Specification

Construction

Steel; machined on all sides.

Finish

Plated.

Weights

Net 18.9 lbs. (8.6 kg).

Accessories



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)

Alternatives



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)



Filter Screen 150mm Dia with 0.15mm Mesh.

Code: [24-9240](#)

Product Group: [Filter Screen, ASTM/AASHTO CBR mould accessories](#)

150 mm dia, 150 µm mesh for use with ASTM mould.

Specification

Mesh	Brass; number 100.
Size	5-15 /16" diam. (135 mm).
Weight	Net 1 oz. (28 g).

Accessories



Filter Paper Equivalent to Whatman No 5 150mm Dia Box of 100.

Code: [24-9250](#)

Alternatives



Filter Paper Equivalent to Whatman No 5 150mm Dia Box of 100.

Code: [24-9250](#)



4.5Kg Annular Surcharge Weight ASTM.

Code: [24-9243](#)

Product Group: [ASTM/AASHTO CBR mould accessories](#)

Accessories



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)

Alternatives



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)



5Lb (2.27Kg) Split Surcharge Weight.

Code: [24-9244](#)

Product Group: [ASTM/AASHTO CBR mould accessories, Surcharge Weights](#)

Specification

Construction
Finish

Machined steel.
Plated.

Accessories



5 Lb. Annular Surcharge Weight ASTM.

Code: [24-9245](#)

Alternatives



5 Lb. Annular Surcharge Weight ASTM.

Code: [24-9245](#)



Filter Paper Equivalent to Whatman No 5 150mm Dia Box of 100.

Code: [24-9250](#)

Product Group: [Filter Paper, ASTM/AASHTO CBR
mould accessories](#)

Box of 100.

Standards

ASTM D1883, AASHTO T193

Specification

Grade	Coarse.
Size	15 cm diam. (5.9â€³).
Weight	Net 8 oz. (227 g).

Accessories



Filter Screen 150mm Dia with 0.15mm Mesh.

Code: [24-9240](#)

Alternatives



Filter Screen 150mm Dia with 0.15mm Mesh.

Code: [24-9240](#)