



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

Contents

www.ele.com
+44 (0) 01525 249 200



This wishlist was generated on 02/08/2017, and contains the following Products:

26-3335

H60 Field Inspection Vane Tester 0-200Kpa In Carrying Case. includes calibration and certificates.

24-0540


Cone Penetrometer. Complete with Stainless Steel Test Cone.

24-0546

Test Gauge for Checking Condition of Cone Point.

24-0548

Penetration Test Cup.

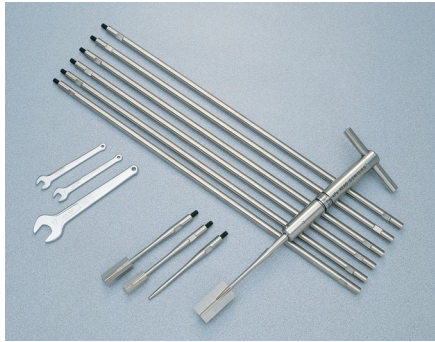

H60 Field Inspection Vane Tester 0-200Kpa In Carrying Case. includes calibration and certificates.

Code: [26-3335](#)


Product Group: [Inspection Vane](#)

This instrument is an essential tool for civil engineers involved in site investigation work. The unit is supplied in kit form with a carrying case incorporating the measuring head, extension rods, vanes, etc. The measuring head comprises a T-handle that is spring-loaded against the extension rod adaptor. Weight 3 kg.

Further Information

Range 0 to 260 kPa, in carrying case with 6 x 0.5 metre extension rods, 3 vanes, dummy vane and tools. Supplied complete with Calibration Certificate.

Spares/Consumables



H605 Extension Rod 0.5M and connection piece

Code: [26-3335/11](#)

Alternatives




Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 110-120V 50/60Hz 1Ph.

Code: [26-2114/02](#)



Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

Code: [26-2114/01](#)

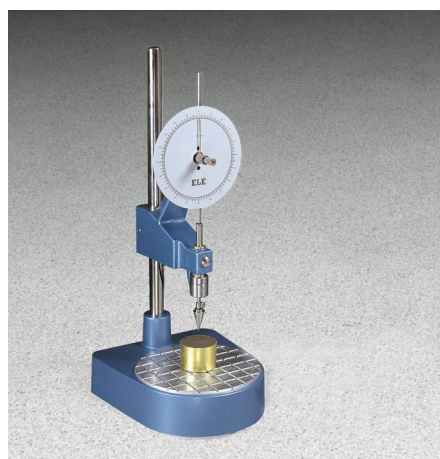

Cone Penetrometer. Complete with Stainless Steel Test Cone.

Code: [24-0540](#)

Product Group: [Cone Penetrometer Method, Cone Penetrometer](#)

Bench mounted apparatus to determine the liquid limit of soils BS1377. This method is applicable to a wide range of soils. The apparatus is fitted with a 150mm diameter dial indicator for direct reading of penetration. Supplied complete with 30deg, 30mm long test cone. Manufactured from stainless steel and includes adjustable levelling feet.

Standards

BS 1377-2

Specification

Dial Indicator	150 mm diameter graduated in 400 x 0.1 mm divisions, indicator point incorporates friction/gear system
Height Adjustment	Rapid, using integral clamping mechanism
Cone release	Manual
Cone	1 x 30°, 35 mm test cone included
Base	Cast aluminium, adjustable levelling feet
Weight kg	7

Accessories



Penetration Test Cup.

Code: [24-0548](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)

Spares/Consumables



Penetration Test Cone

Code: [24-0544](#)

Alternatives



Semi-Automatic Cone Penetrometer

Code: [24-0545/01](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)

Product Group: [Cone Penetrometer Method, Cone Penetrometer](#)

55 mm diameter by 40 mm deep, with the rim parallel to the flat base.

Standards

BS 1377-2



Penetration Test Cup.

Code: [24-0548](#)

Product Group: [Cone Penetrometer](#), [Cone Penetrometer Method](#)

Brass construction, 55mm dia x 4mm depth to fit BS1377

Standards

BS 1377-2