



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 10/10/2017, and contains the following Products:

25-0402

**Consolidation Frame One Dimensional Consolidation Incremental Loading Device.**

25-0408

**Set of Weights 100Kg Total Weight.**

25-0440

**Dial Gauge 10mm Travel X 0.002mm Divisions.**

25-0479

**Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.**

25-0485

**Calibration Disc 2.5 Inch Cell**

25-0429

**Floor Mounting Stand.**

27-1300/01

**DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz**

27-1649

**Consolidation Transducer Assembly 10mm Travel Fitted with 5 Pin Din Plug.**

27-1773

**DS7.2 One-Dimensional Consolidation Program for Windows 7, 32/64 bit**

25-4210

**Dial Gauge 25mm Travel X 0.01mm Divisions**

25-5050

**Pressure Pad 38mm/1.5 Inch Diameter.**

25-5061

**Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.**

25-5081

**Membrane Sealing Ring 1.5"**

25-5100

---

## Suction Membrane Device 38mm/1.5 Inch Diameter.

---

25-5120

## Two-Way Split Former 38mm/1.5 Inch Diameter.

---

25-5181

## Porous Disc 38mm/1.5 inch Diameter. Pack of 2.

---

25-5200

## Filter Paper Drain 38mm/1.5 inch Diameter. Pack of 50.

---

26-1746

## Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

---

26-1760

## Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.

---

26-1769

## Nylon Tubing 30 Metre Length.

---

26-1880

## Universal Pump and Pressure Indicating Panel 1700Kpa.

---

26-1892

## Twin Burette Volume Change Unit.

---

26-1926

## Nylon Tubing 6mm Od 3500Kpa.

---

27-1620

## Digital Pressure Gauge 1700Kpa. for Ele Triaxial Cells.

---

78-0260

## Clamped Boss Load Ring - 4.5 kN

---

26-1928

## 6mm Elbow Connector.

---

26-1930

## 6mm T Connector.

---

83-1730/01

## Air Compressor

---

25-1833/01

**De-Aired Water Apparatus 15 Litre Capacity**

---

25-3518/01

**Digital Tritest 50 Load Frame**

---

25-4047

**50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.**

---

25-4166

**38mm/1.5 Inch Base Adaptor for 50mm Cells.**

---

25-4200

**Piston Restraint Clamp for Ele Triaxial Cells**

---

25-4290

**Membrane Placing Tool 35mm/38mm.**

---

25-4520

**Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.**

---



## Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

Code: 25-0402

Product Group: Consolidation Apparatus, Table Top Consolidation Apparatus

- High capacity - 8800 kPa on 50 mm diameter specimens using 11:1 beam ratio
- Triple beam ratio, 9:1, 10:1, 11:1
- Compact unit ensures maximum space saving

The ELE Oedometer is rigidly constructed to ensure minimum frame distortion. The frame is designed to load the specimen through a yoke assembly and one of three alternative beam ratios. The beam is fitted with a counterbalance weight and beam support jack. The cell platform will accept the complete range of ELE consolidation cells and is fitted with a central spigot to ensure accurate centring of the cell under the loading yoke. Dimensions without hanger 711 x 203 x 508 mm (l x w x h). Weight 22 kg.

## Standards

ASTM D2435, ASTM D4546, AASHTO T216, ASTM D3877, BS 1377-5

## Further Information

Supplied without dial gauge and weights.

## Specification

Load Capacity	48 tons/sq. ft. (5,14 8 kPa) on 2.5" (63 mm) diam. samples.
Loading Beam	Cast aluminum; counterbalanced; 9:1,10:1 and 11 :1 ratios.
Frame	Cast aluminum; integral beam support jack; plated steel and platform.
Dimensions	203 x 711 x 508 mm, (8" w. x 28" d. x 20" h) . excluding weight hanger.
Weight	(Net 30 lbs). 13 .6 kg; Shpg. 40 lbs. (18.1 kg).

## Accessories



## 16 Ton Weight Set

Code: [25-0544](#)



## 2.416" Fixed Ring Consolidometer

Code: [25-0480](#)



## 2.5" Floating Ring Consolidometer

Code: [25-0530](#)



## Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.

Code: [25-0479](#)



## Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)



## Consolidation Cell/ Oedometer Complete 75mm Diameter Sample

Code: [25-0503](#)





## Floor Mounting Stand.

Code: [25-0429](#)



## Mechanical Dial Indicator - 0.4" Range

Code: [88-4070](#)



## Mechanical Dial Indicator - 1.0" Range Counter Clockwise Movement

Code: [88-4120](#)



## Mechanical Dial Indicator - 10 mm Range

Code: [88-4080](#)



## Mechanical Dial Indicator - 25 mm Range Counter Clockwise Movement

Code: [88-4130](#)



## Set of Weights 100Kg Total Weight.

Code: [25-0408](#)



## Weight Set A

Code: [25-0535](#)



## Weight Set B

Code: [25-0537](#)


## Spares/Consumables



## Electronic Digital Indicator, 0.600"/15 mm range

Code: [88-4210](#)

## Alternatives



## Pneumatic Consolidation Apparatus

Code: [25-0560](#)





## Set of Weights 100Kg Total Weight.


Code: [25-0408](#)

Product Group: [Consolidation Apparatus](#)

9 x 10 kg, 1 x 5 kg, 2 x 2 kg, 1 x 1 kg.

## Standards

ASTM D2435, ASTM D4546, AASHTO T216, ASTM D3877, BS 1377-5

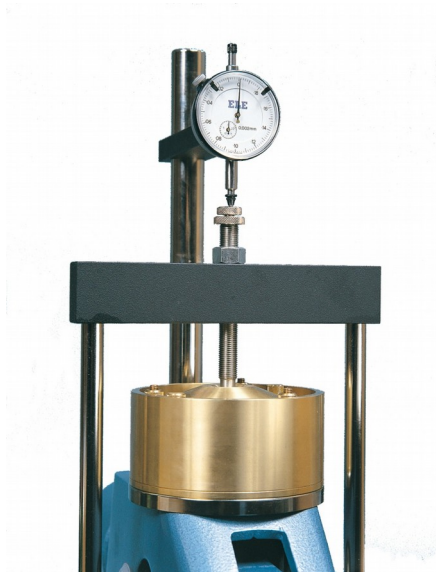

## Dial Gauge 10mm Travel X 0.002mm Divisions.

Code: [25-0440](#)

Product Group: [Direct/Residual Shear Apparatus](#),  
[Measurement of Horizontal and Vertical Movement](#),  
[Vertical settlement measurement](#)

## Spares/Consumables



## Electronic Digital Indicator, 0.600"/15 mm range

Code: [88-4210](#)



## Vertical Dial Indicator, English

Code: [25-0445](#)



## Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.

Code: [25-0479](#)

Product Group: [Table Top Consolidation Apparatus](#), [ASTM/AASHTO consolidation cells and accessories](#), [Pneumatic Consolidation Apparatus](#), [Fixed Ring Consolidation](#)

## Standards

ASTM D2435, ASTM D4546, AASHTO T216, ASTM D3877

## Specification

Application	ASTM
Specimen Dia	2.5 inch
Specimen area	4.909 inch <sup>2</sup>
Beam ratio	10:1
Load kg	1.55
Stress	1000 lbf/ft <sup>2</sup>
Typical max stress	103 200 lbf/ft <sup>2</sup>
Stress for 1 kg m <sup>2</sup>	645 lbf/ft <sup>2</sup>

## Accessories



### 2.5" Floating Ring Consolidometer

Code: [25-0530](#)



### Calibration Disc 2.5 Inch Cell

Code: [25-0485](#)



### Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)



## Consolidation Cell/ Oedometer Complete 75mm Diameter Sample

Code: [25-0503](#)

### Spares/Consumables



## 2.5 Inch Dia Upper and Lower Porous Stones for Use on EL25-0479 Series Cell.

Code: [25-0479/13](#)



## Cutting Ring for 25-0479

Code: [25-0482](#)

### Alternatives



## 2.5" Floating Ring Consolidometer

Code: [25-0530](#)



## Calibration Disc 2.5 Inch Cell

Code: [25-0485](#)



## Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)



## Consolidation Cell/ Oedometer Complete 75mm Diameter Sample

Code: [25-0503](#)



## Calibration Disc 2.5 Inch Cell

Code: [25-0485](#)

Product Group: [ASTM/AASHTO consolidation cells and accessories](#), [Fixed Ring Consolidation](#)

## Standards

ASTM D2435, ASTM D4546, AASHTO T216, ASTM D3877

## Accessories



## Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.

Code: [25-0479](#)

## Alternatives



## Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.

Code: [25-0479](#)





## Floor Mounting Stand.

Code: [25-0429](#)

Product Group: [Consolidation Apparatus, Table Top Consolidation Apparatus](#)

A versatile modular steel stand. Holes in the shelf are provided for securing up to three EL25-0402 Consolidation Frames. Dimensions 610 x 915 x 865 mm (l x w x h).

## Standards

ASTM D2435, ASTM D4546, AASHTO T216, ASTM D3877, BS 1377-5



## DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

Code: [27-1300/01](#)

Product Group: [Data Logging with the DSU](#), [Electronic Instrumentation](#), [Electronic Instrumentation](#), [Electronic Instrumentation](#), [Data Logging with the DSU](#)

· Download the full brochure here  
[[/Page/catalogue-download/NTRmZS9UaGUgTkVXIERTVSBVU0EucGRm](#)]

- 4 channel automatic control and data-logging unit
- Automatic, dual-frame control
- Performs CBR, Marshall, Unconfined Compression, Direct and Residual Shear, One-Dimensional Consolidation and Unconsolidated Undrained tests
- LAN connection - software can be running anywhere on your server
- Never lose data from power fails - 2 gigabytes of non-volatile memory
- Extended warranty

The Data System Unit (DSU) is a versatile instrument designed to accommodate the general logging requirements of geotechnical and materials testing engineers. Its intelligent interface allows the user to work with a range of different sensors.

## Further Information

The DSU has two distinct modes of operation. The first is referred to as DS mode (DataSystem) for operation with ELE International's established DS7 geotechnical testing software.

### DS MODE

- Up to four one dimensional consolidation tests
- Up to two CBR tests
- One direct/residual shear test
- One triaxial quick un-drained test

### DU MODE

- Up to two Marshall tests
- Up to two CBR tests
- Up to two Unconfined compression tests
- Automatic frame control

### OVERVIEW

- Touch Screen data entry for standalone operation, Marshall/CBR/Quick un-drained

- Automatic single and dual frame control (with multiplex 50 frame)
- Log memory of 2 gigabytes
- Non-volatile memory
- Ethernet TCPIP link and serial comms support
- Market leading signal stability
- Certificate and manual calibration features

Become a member of the ELE International web site, add this new product to a wishlist to receive a quote! Click here [Login]

This product is now available in the USA and Canada!

---

## Accessories



### Cable, Safety/ID

Code: [27-1300/11](#)



### Dual Frame Comms Cable

Code: [27-1300/10](#)



### PC Cable

Code: [27-1300/12](#)

---

## Alternatives



### DSU Electronic Readout and Control System 110 V AC 60 Hz

Code: [27-1300/02](#)



## Marshall Test 50

Code: [45-6810/01](#)



## Marshall Test 50

Code: [45-6810/06](#)



## Consolidation Transducer Assembly 10mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1649](#)

Product Group: [Displacement Measurement](#),  
[Displacement Transducers](#), [Vertical settlement measurement](#)

Fitted with 5 pin DIN plug.

## Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	11 V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45

## Accessories



## Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1617](#)



## Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



## Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)

### Spares/Consumables



## CBR Displacement Transducer

Code: [27-1706](#)

### Alternatives



## Transducer Extension Cable 3.0 m

Code: [27-1717](#)





## Transducer Extension Cable 4.5 m

Code: [27-1719](#)



## DS7.2 One-Dimensional Consolidation Program for Windows 7, 32/64 bit

Code: [27-1773](#)

Product Group: [DS7, DS7.2 One-Dimensional Consolidation Software](#)

DS7.1 Consolidation Software provides all basic functions needed to record and analyse consolidation test data. Options are available for monitoring settlement on a log time or square-root time basis. Printouts and graphical plots are available for all stages including  $M_v$  and  $C_v$  moisture content, voids ratio plots, and initial sample conditions.



## Dial Gauge 25mm Travel X 0.01mm Divisions

Code: [25-4210](#)

Product Group: [Digital Tritest 50 Load Frame, Axial Displacement](#)

25 mm travel x 0.01 mm

## Standards

BS 1377

## Accessories



## Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1617](#)

## Spares/Consumables



## Dial Indicator - 1.0" Range

Code: [88-4100](#)

## Alternatives



## Digital Tritest 50 Load Frame

Code: [25-3518/02](#)



## Electronic Digital Indicator, 1.0"/25.4 mm range

Code: [88-4220](#)



## Versa-Loader

Code: [25-3525/02](#)

## Pressure Pad 38mm/1.5 Inch Diameter.

Code: [25-5050](#)

Product Group: [Pressure Pads](#)

38 mm / 1.5 Inch diameter pressure pad. The pad shall have two empty ports and will come complete with two blanking plugs, plastic tubing and connector. Suitable For both drained and undrained tests.



## Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297



## Rubber Membrane 38mm/1.5 Inch Diameter. Pack of 10.

Code: [25-5061](#)

Product Group: [Rubber Membranes](#)

Rubber Membrane For 38Mm/1.5 Inch Samples (Pack Of 10).

### Standards

AASHTO T296, AASHTO T297, ASTM D2850, ASTM D4767, ASTM D5084, ASTM D7181





## Membrane Sealing Ring 1.5"

Code: [25-5081](#)

Product Group: [Sealing Rings](#)

Membrane Sealing Ring 38Mm Diameter (Pack Of 10).



## Suction Membrane Device 38mm/1.5 Inch Diameter.

Code: [25-5100](#)

Product Group: [Suction Membrane Devices, Suction Membrane Device](#)

Suction Membrane Device For 38Mm/1.5 Inch Samples.




## Two-Way Split Former 38mm/1.5 Inch Diameter.

Code: [25-5120](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

Two-Way Split Former For 38Mm/1.5 Inch Samples.

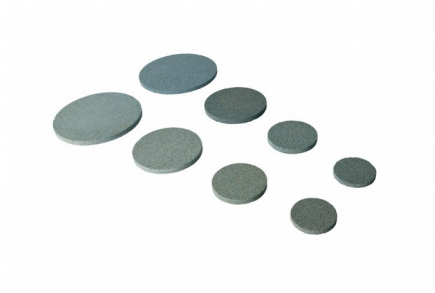

## **Porous Disc 38mm/1.5 inch Diameter. Pack of 2.**

Code: [25-5181](#)

Product Group: [Accessories for CU/CU effective stress, Porous Stones](#)

Porous disc for 38 mm/1.5 inch samples (Pack of 2).



## **Filter Paper Drain 38mm/1.5 inch Diameter. Pack of 50.**

Code: [25-5200](#)

Product Group: [Accessories for CU/CU effective stress, Filter Paper Drains](#)

Filter paper drain 38 mm diameter (Pack of 50).



## Bladder-Type Air/Water Pressure Assembly. 1000 Kpa Maximum Working Pressure.

Code: 26-1746

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

With transparent plastic chamber for operating continuously at pressures up to 1000 kPa. A length of tubing is provided for connecting the air/water cylinder outlet to a pressure measuring system.

- Used to supply hydraulic pressure from a pneumatic pressure source.
- Prevents air entering the hydraulic pressure system.
- Maximum working pressure 1000kpa.
- Supplied with connectors and tubing for fitting to pressure measuring systems.

## Accessories



### Nylon Tubing 30 Metre Length.

Code: 26-1769

## Spares/Consumables



### Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.


Code: 26-1760



### Replacement Bladder Wide Neck (38mm Id)

Code: 26-1746/10



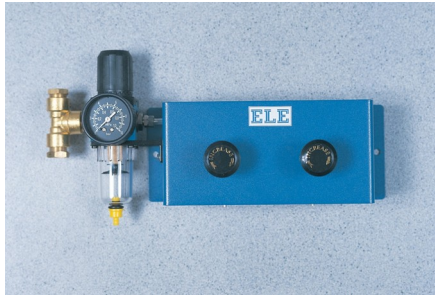

## **Pneumatic Pressure Reducing Panel. Provides Two Independent Pressure Outlets 1000 kPa Max.**

Code: [26-1760](#)

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

Comprising two constant pressure reducing valves with inlet water trap and pressure indicator. The unit allows a maximum output pressure of 1000 kPa. Maximum input pressure should not exceed 1400 kPa. The panel has an inlet connector to accept Nylon tubing from the air compressor and two 6 mm outlets for connecting Bladdertype Air/Water Pressure Assemblies. An outlet connector is fitted for the connection of an additional panel using Nylon tubing to increase the total capacity of the system. This outlet is blanked off when not required.



## Nylon Tubing 30 Metre Length.

Code: [26-1769](#)

Product Group: [Air/Water Pressure Systems - up to 1000 kPa](#)

30 metre length. For pressures up to 1700 kPa. Used for connecting Air Compressors to Pneumatic Pressure Reducing Panels, or for connecting two Pressure Reducing Panels together.

## Further Information

Nylon tubing 30 metres with pressure fittings.




## Universal Pump and Pressure Indicating Panel 1700Kpa.

Code: [26-1880](#)

Product Group: [Modular Pressure Panel System](#)


This is the main pressure display in the system for monitoring various pressures and also provides fine control of the pressure within the system using the rotary hand pump. The unit is fitted with a dual calibrated 250 mm diameter pressure gauge, four inlet/outlet no-volume change valves, screw controlled rotary hand pump, water reservoir and isolating valves. The unit is housed in a hinged case for wall or bench mounting. By using an isolating valve the panel may be used to monitor cell or back pressure. 1700 kPa and 250 lbf/in<sup>2</sup>.

## Spares/Consumables



### Pressure Gauge 1700Kpa (250Psi) 250mm Diameter.

Code: [26-1865/10](#)

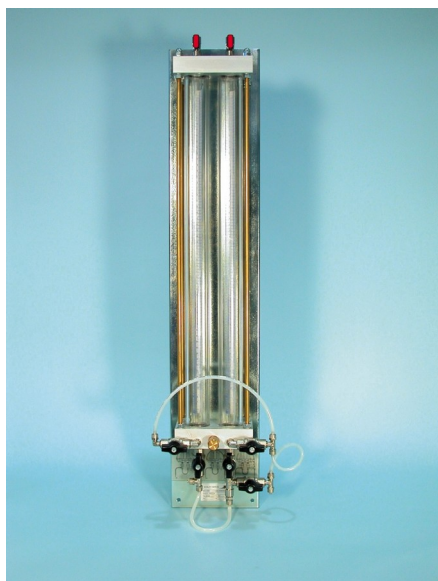

## Twin Burette Volume Change Unit.

Code: [26-1892](#)

Product Group: [Volume Change Measurement](#)

Fitted with reversing valve and by-pass valve. The unit is fitted with burettes graduated 0 to 100 ml x 0.2 ml and is mounted on a solid panel for wall or bench mounting supplied with 100 ml capacity x 0.2 ml burettes.

## Accessories



## Red Dye Kerosene Soluble 10G Phial for Colouring Kerosene.

Code: [26-1900](#)



## Nylon Tubing 6mm Od 3500Kpa.

Code: [26-1926](#)

Product Group: [Permeability of Rock, Volume Change Measurement](#)

6 mm outside diameter x 4 mm inside diameter. For use up to a pressure of 3500 kPa. Priced per metre.



## Digital Pressure Gauge 1700Kpa. for Ele Triaxial Cells.

Code: [27-1620](#)

Product Group: [Oil/Water Constant Pressure System](#),  
[Pressure Measurement](#), [Digital Pressure Gauge](#)

For ELE Triaxial Cells. The Digital Pressure Gauge offers highly accurate pressure measurement and digital readout for ELE triaxial cells.

## Standards

ASTM D2850, ASTM D4767, ASTM D7181, ASTM D5084, AASHTO T296, AASHTO T297

## Specification

Capacity	250 psi (1,700 kPa).
Display	LCD.
Display Units	PSI, kPa, MPa.
Accuracy	Better than 1% of indicated pressure.
Read Rate	Two samples per second.
Power Supply	3 volt battery, CR 2340 type.
Battery Life	1400 hours continuous operation.
Dimensions	2.30" w. x 1.25 " d. x 3.75" h. (59 x 32 x 95 mm.)
Weight	Net 1/4 lb. (125 g).



## Clamped Boss Load Ring - 4.5 kN

Code: 78-0260

Product Group: Clamped Boss Load Rings, Digital Tritest 50 Load Frame, Load Measurement, Load Measurement, Direct/Residual Shear Apparatus, Proving Rings, Load Measurement

### Specification

Capacity: kN, kgf, lbf	4.5, 450, 1000
Typical Design sensitivity: N/div, kgf/div, lbf/div	3.0, 0.30, 0.66
Overall height mm	248
Approx weight kg	3.5
Capacity - lbf	1,000
Capacity - kN	4.5
Capacity - kgf	450
Typical Design Sensitivity - lbf/div	0.66
Typical Design Sensitivity - kN/div	3
Typical Design Sensitivity - Kg/div	0.3
Overall Height	9.76" (248 mm)
Approx Weight	7.7 lbs.(3.5 kg)

### Accessories



## 50kN Clamped Boss Load Ring

Code: 78-0860



## Clamped Boss Load Ring - 10.0 kN

Code: 78-0460



## Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



## Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



## Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



## Digital Proving Ring, 1,000 lbs (4.5 kN)

Code: [78-0264](#)

## Spares/Consumables



## Spare Dial Indicator for Load Rings

Code: [78-5461](#)

## Alternatives



## 50kN Clamped Boss Load Ring

Code: [78-0860](#)





## Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



## Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



## Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



## Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



## Digital Proving Ring, 1,000 lbs (4.5 kN)

Code: [78-0264](#)



## 6mm Elbow Connector.

Code: [26-1928](#)

Product Group: [Volume Change Measurement](#)



## 6mm T Connector.

Code: [26-1930](#)

Product Group: [Volume Change Measurement](#)



## Air Compressor

Code: 83-1730/01

Product Group: Air Compressors, Air/Water Pressure Systems - up to 1000 kPa

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

## Specification

Dimensions (l x w x h)	483 x 457 x 864 mm
Free air delivery	2.0 cfm
Receiver capacity	50 litres
Maximum pressure	1000 kPa
Continuous working pressure	700 kPa
Electrical supply	220 – 240 V AC 1 ph 50 Hz
Water Trap	No
Weight	57 kg

## De-Aired Water Apparatus 15 Litre Capacity

Code: [25-1833/01](#)

Product Group: [De-Aired Water](#)



This compact self-contained unit will de-air water quickly and efficiently down to levels of dissolved oxygen acceptable for geotechnical test methods. Air is removed from the water by a vacuum system, which continuously circulates the water in the tank. The unit is supplied with a clear water container, which will hold a maximum of 15 litres of water. Input and output lines are formed using standard 6 mm tube connectors.

## Standards

BS 1377-1

## Specification

Dimensions l x w x h (mm)      380 x 356 x 470



## Digital Tritest 50 Load Frame

Code: [25-3518/01](#)

Product Group: [Digital Tritest 50 Load Frame](#), [CBR Load Frames](#), [Triaxial Load Frames](#)

- Microprocessor control
- Large on-board LED screen display
- Direct entry via a touch sensitive keyboard
- Rapid approach and return to datum of platen
- Fully variable speed, 0.00001 to 9.99999 mm/min
- Samples up to 100 mm diameter

This 50 kN capacity machine, designed primarily for triaxial testing of soil specimens up to 100 mm diameter x 200 mm long, comprises a rigid twin column construction with an integral fully variable microprocessor controlled drive unit and LCD display with a touch sensitive keyboard. The machine is normally bench mounted for ease of installation and operation.

The use of a microprocessor controlled drive system and keyboard entry provides the Digital Tritest 50 with a wide variety of features which include pause and speed reset during test, RS 232C, operator programming of speed and control functions, self test diagnostics and many other features.

A robustly constructed steel case houses the motor drive system with careful attention being given to the prevention of ingress of water or grit. All operating controls are mounted on the front panel of the machine, which is angled and recessed to prevent physical and environmental damage.

## Standards

BS 1377-7, BS 1377-8, BS 1924-2, ASTM D1883, ASTM D2166, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180, AASHTO T193, AASHTO T208, AASHTO T296, AASHTO T297

## Further Information

Complete with RS 232C interface.

## Specification

Capacity	50kN (11,200 lbf).
Speed Range	English mode: 0.000001 to 0.399999 in/min. Metric mode: 0.00001 to 9.99999 mm/min.
Rapid Approach Speed	1.0 in/min. (25 mm/min.).

# Product Sheet

www.ele.com  
+44 (0) 01525 249 200




Platen Travel	100mm (3.9"); limit switch protection.
Platen Diameter	133 mm (5.2")
Vertical Clearance	910 mm, (36 .8") maximum; 305mm, (12") minimum.
Horizontal Clearance	364mm, (15 .3").
Serial Interface	RS232C; programmable baud rate and protocol.
Overall Dimensions	500 x 500 x 1,470 mm, (19.7" w. x 19.7" d. x 57.8" h).
Weight	Net 100kg (220 lbs); Shpg. 136kg (300 lbs).

## Accessories



### 50kN Clamped Boss Load Ring

Code: [78-0860](#)



### Adaptor kit, to perform CBR on the Tritest 50 load frame

Code: [25-3518/10](#)



### Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



### Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



## Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



## Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)

## Alternatives



## MultiPlex 50 Load Frame

Code: [25-3700/01](#)



## Versa-Loader

Code: [25-3525/02](#)





## 50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: 25-4047

Product Group: Triaxial Cell, Triaxial Cells

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

## Specification

Cell size	50 mm
Max specimen size	50 x 100 mm
Working pressure	1700 kPa
Max piston load	45 kN
Vertical clearance required	380 mm
Horizontal clearance required	155 mm
Weight kg	4

## Accessories



### 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)



### 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



### Pressure Interface Chamber

Code: [25-0695](#)

## Alternatives



### 100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4157](#)



### 70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4117](#)



## 38mm/1.5 Inch Base Adaptor for 50mm Cells.

Code: [25-4166](#)

Product Group: [Specimen Base Adaptors, Base Pedestals](#)

38mm/1.5 Inch Base Adaptor with Twin Pore Pressure Ports for 50mm Cells.

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

## Accessories



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)

### Alternatives



## 100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



## 50mm Base Adapter for 50mm Cells.

Code: [25-4168](#)



## 50mm Base Adaptors for 70mm Cells.

Code: [25-4174](#)



## 70mm Base Adaptor for 70mm Cells.

Code: [25-4176](#)



## Piston Restraint Clamp for Ele Triaxial Cells

Code: [25-4200](#)

Product Group: [Aggressive Materials, General Cell Accessories](#)

For ELE Triaxial Cells Manufactured From July 1996.

## Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

## Further Information

To lock the loading piston into position



## Membrane Placing Tool 35mm/38mm.

Code: [25-4290](#)

Product Group: [Membrane Placing Tools, O-Ring Placing Tools](#)

Membrane Placing Tool For 35Mm/1.4 Inch And 38Mm/1.5 Inch Samples.

## Standards

ASTM D2850, ASTM D4767, ASTM D5084, AASHTO T296, AASHTO T297, ASTM D7181

## Accessories



## Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



## Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)

## Alternatives



## Membrane Placing Tool 100mm/4 Inch Diameter.

Code: [25-7610](#)



## Membrane Placing Tool 70mm/2.8 Inch Diameter.

Code: [25-6470](#)



## Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.

Code: [25-4520](#)

Product Group: [Accessories for CU/CU effective stress, General Cell Accessories](#)

### Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297