



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 16/11/2017, and contains the following Products:

560-020

Protimeter Grainmaster Moisture Meter with 15 Pre-Programmed Crop Calibrations.

25-3518/01

Digital Tritest 50 Load Frame

2230/01

DataSystem Consolidation Test Set 220 vAC

27-1505

8-Channel Expansion Analog Input Module

25-4157

100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

78-0760

Clamped Boss Load Ring - 28.0 kN

27-1617

Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

25-0611

De-Airing Tank.

82-7720/01

Vacuum Pump

82-7720/12

Water Trap

81-0375

Rubber Tubing

27-1620

Digital Pressure Gauge 1700Kpa. for Ele Triaxial Cells.

25-4520

Valve No Volume Change 1/4 Inch BSp Fitted with 6 mm Connector and Integral Sealing Ring.



Protimeter Grainmaster Moisture Meter with 15 Pre-Programmed Crop Calibrations.

Code: **560-020**

Product Group: **Moisture meters**

- Microprocessor controlled.
- Automatic temperature compensation.
- Instant LCD readings for many crops.
- Temperature measurement facilities.

A completely portable unit suited to in-store or field use. Incorporates instant digital-readout of moisture content and automatic temperature compensation for rapid and accurate moisture determinations.

The simple 4 stage operation takes less than a minute per sample:

- Insert the program key for the crop to be tested.
- Place grinder over sample cell and grind sample.
- Compress the sample.
- Press "ON" switch and read moisture content.

The unit is battery powered and can be used with a wide variety of crops using interchangeable program keys for direct readings. In addition, by using the probe accessory the meter may also be used to measure the temperature of stored grain, thus enabling the principle grain quality and storage checks to be carried out with one instrument.

Further Information

Supplied with sip-top pouch, compressor, hand grider, quick check standard, high check standard, storage case for program keys, calibration chart and prgram keys for ground samples of wheat and barley to ISO standard.

Requires one PP3 battery - not included. Supplied with sip-top pouch, compressor, hand grider, quick check standard, high check standard, storage case for program keys, calibration chart and prgram keys for ground samples of wheat and barley to ISO standard.

Requires one PP3 battery - not included. Supplied with sip-top pouch, compressor, hand grider, quick check standard, high check standard, storage case for program keys, calibration chart and prgram keys for ground samples of wheat and barley to ISO standard.

Requires one PP3 battery - not included. Supplied with sip-top pouch, compressor, hand grider, quick check standard, high check standard, storage case for program keys, calibration chart and prgram keys for ground samples of wheat and barley to ISO standard.

Requires one PP3 battery - not included. Supplied with sip-top pouch, compressor, hand grider, quick check standard, high check standard, storage case for program keys, calibration chart and prgram keys for ground samples of wheat and barley to ISO standard.

Requires one PP3 battery - not included.

Accessories



Fast Response Temperature Probe 1m Length. for Use with 560-020.

Code: [560-022](#)



Digital Tritest 50 Load Frame

Code: [25-3518/01](#)

Product Group: [Digital Tritest 50 Load Frame](#), [CBR Load Frames](#), [Triaxial Load Frames](#)

- Microprocessor control
- Large on-board LED screen display
- Direct entry via a touch sensitive keyboard
- Rapid approach and return to datum of platen
- Fully variable speed, 0.00001 to 9.99999 mm/min
- Samples up to 100 mm diameter

This 50 kN capacity machine, designed primarily for triaxial testing of soil specimens up to 100 mm diameter x 200 mm long, comprises a rigid twin column construction with an integral fully variable microprocessor controlled drive unit and LCD display with a touch sensitive keyboard. The machine is normally bench mounted for ease of installation and operation.

The use of a microprocessor controlled drive system and keyboard entry provides the Digital Tritest 50 with a wide variety of features which include pause and speed reset during test, RS 232C, operator programming of speed and control functions, self test diagnostics and many other features.

A robustly constructed steel case houses the motor drive system with careful attention being given to the prevention of ingress of water or grit. All operating controls are mounted on the front panel of the machine, which is angled and recessed to prevent physical and environmental damage.

Standards

BS 1377-7, BS 1377-8, BS 1924-2, ASTM D1883, ASTM D2166, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180, AASHTO T193, AASHTO T208, AASHTO T296, AASHTO T297

Further Information

Complete with RS 232C interface.

Specification

Capacity	50kN (11,200 lbf).
Speed Range	English mode: 0.000001 to 0.399999 in/min. Metric mode: 0.00001 to 9.99999 mm/min.
Rapid Approach Speed	1.0 in/min. (25 mm/min.).

Product Sheet

www.ele.com
+44 (0) 01525 249 200




Platen Travel	100mm (3.9"); limit switch protection.
Platen Diameter	133 mm (5.2")
Vertical Clearance	910 mm, (36 .8") maximum; 305mm, (12") minimum.
Horizontal Clearance	364mm, (15 .3").
Serial Interface	RS232C; programmable baud rate and protocol.
Overall Dimensions	500 x 500 x 1,470 mm, (19.7" w. x 19.7" d. x 57.8" h).
Weight	Net 100kg (220 lbs); Shpg. 136kg (300 lbs).

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Adaptor kit, to perform CBR on the Tritest 50 load frame

Code: [25-3518/10](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)

Alternatives



MultiPlex 50 Load Frame

Code: [25-3700/01](#)



Versa-Loader

Code: [25-3525/02](#)



DataSystem Consolidation Test Set 220 vAC

Code: [2230/01](#)

Product Group: [DataSystem Consolidation Test Set](#)

Set includes:

- 1 Table Top Consolidation Apparatus (25-0402).
- 1 Fixed Ring Consolidometer, 2.5" (25-0479).
- 1 Weight Set (25-0535).
- 1 Floor Mounting Stand (25-0429).
- 1 GDU 8-Channel Geotechnical Data Unit (27-1500/01).
- 1 Consolidation Displacement Transducer (27-1649).
- 1 One Dimensional Consolidation Program (27-1770).

Standards

ASTM D2435, ASTM D4546, AASHTO T216

Further Information


220vAC, 50/60 Hz, 1ø.

Alternatives



DataSystem Consolidation Test Set 110 vAC

Code: [2230/02](#)

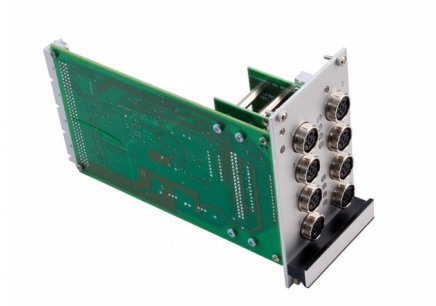

8-Channel Expansion Analog Input Module

Code: [27-1505](#)

Product Group: [Geotechnical Data Acquisition Unit \(GDU\)](#)



100mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4157](#)

Product Group: [Triaxial Cell](#), [Triaxial Cells](#)

- Working pressure up to 1700 kPa
- All round visibility
- Sample sizes 38 to 100 mm diameter
- Rapid assembly and dismantling
- Accepts a range of interchangeable submersible load transducers

This range of precision made triaxial cells has been designed to meet the requirements of the modern soils laboratory. The cells have been treated to minimise corrosion. Particular attention has been paid to the quality of finish between the piston and the head. Final assembly includes the fitting of an O-ring seal and the use of special lubricant to reduce friction to a minimum and eliminate water leakage.

The piston load capacity is designed to accept high horizontal forces which may be present during the final stages of a test. Each cell has five take-off positions drilled in the base for top drainage/back pressure, pore water pressure and bottom drainage. Two no-volume change valves and an anvil for strain gauge/transducer datum are supplied for fitting to the cell.

A feature of these cells is that they all accept a single diameter piston. The internal height is such that a range of submersible load transducers can be fitted without any modification. Each cell will accept a range of base adaptors and various accessories for testing a wide range of specimens

Standards

BS 1377, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297

Accessories



100 mm Base Adaptor for 100 mm Triaxial Cell.

Code: [25-4186](#)



Pressure Interface Chamber

Code: [25-0695](#)

Alternatives



50mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4047](#)



70mm Triaxial Cell 1700Kpa with 5 Pressure/ Drainage Ports. Supplied with Two Valves.

Code: [25-4117](#)



Clamped Boss Load Ring - 28.0 kN

Code: 78-0760

Product Group: Clamped Boss Load Rings, Digital Tritest 50 Load Frame, Load Measurement, Proving Rings, CBR-Test 50 Machine, Conversion of In-situ to Laboratory CBR, Load Measurement, CBR Loading Press, Hand-Operated, Force measurement

Standards

BS 1377, BS 1924

Specification

Capacity: kN, kgf, lbf	28.0, 2800, 6000
Typical Design sensitivity: N/div, kgf/div, lbf/div	25.5, 2.54, 5.45
Overall height mm	248
Approx weight kg	5.4
Capacity	28 kN
Value of CBR	Average range of CBR
Capacity - lbf	6,000
Capacity - kN	28
Capacity - kgf	2,800
Typical Design Sensitivity - lbf/div	5.45
Typical Design Sensitivity - kN/div	25.5
Typical Design Sensitivity - Kgf/div	2.54
Overall Height	9.76" (248 mm)
Approx Weight	11 .9 lbs.(5.4 kg)

Accessories



50kN Clamped Boss Load Ring

Code: 78-0860



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 6,000 lbs (28.0 kN)

Code: [78-0764](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 6,000 lbs (28.0 kN)

Code: [78-0764](#)



Axial Strain Transducer Assembly 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1617](#)

Product Group: [Axial Displacement](#), [Axial Displacement](#), [Displacement Transducers](#)

0 to 50 mm range. For use with Triaxial Cells.

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	10V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45

Accessories



Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)

Spares/Consumables



CBR Displacement Transducer

Code: [27-1706](#)

Alternatives



Horizontal Displacement Transducer Assembly 15mm Travel 5 Pin Din Plug Mounting Pillar

Code: [27-1697](#)



Vertical Displacement Transducer Assembly 15mm Travel with 5 Pin Din Plug Bracket for Shear Box

Code: [27-1689](#)



De-Airing Tank.

Code: [25-0611](#)

Product Group: [Compaction Permeameter](#)

Manufactured from transparent plastic with de-airing jet inlet and a flow outlet connection with flexible tubing. The tank is manufactured to withstand a reduced pressure and is suitable for direct wall mounting.



Vacuum Pump

Code: [82-7720/01](#)

Product Group: [Vacuum Pumps](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Type	Single stage
Pump	Oil filled rotary
Ultimate vacuum	Better than 0.1 mbar
Displacement	42 litres per minute (2.4 m ³ /hour)
Electrical supply	220 – 240 V AC, 50 - 60 Hz, 1 ph
Weight	12.7 kg



Water Trap

Code: [82-7720/12](#)

Product Group: [Vacuum Pumps](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Rubber Tubing

Code: [81-0375](#)

Product Group: [Vacuum Pumps, Rubber Tubing](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Bore	6.5 mm
Wall thickness	5.0 mm
Sold by	Metre



Digital Pressure Gauge 1700Kpa. for Ele Triaxial Cells.

Code: 27-1620

Product Group: Oil/Water Constant Pressure System, Pressure Measurement, Digital Pressure Gauge

For ELE Triaxial Cells. The Digital Pressure Gauge offers highly accurate pressure measurement and digital readout for ELE triaxial cells.

Standards

ASTM D2850, ASTM D4767, ASTM D7181, ASTM D5084, AASHTO T296, AASHTO T297

Specification

Capacity	250 psi (1,700 kPa).
Display	LCD.
Display Units	PSI, kPa, MPa.
Accuracy	Better than 1% of indicated pressure.
Read Rate	Two samples per second.
Power Supply	3 volt battery, CR 2340 type.
Battery Life	1400 hours continuous operation.
Dimensions	2.30" w. x 1.25 " d. x 3.75" h. (59 x 32 x 95 mm.)
Weight	Net 1/4 lb. (125 g).



**Valve No Volume Change 1/4 Inch BSp
Fitted with 6 mm Connector and Integral
Sealing Ring.**

Code: [25-4520](#)

Product Group: [Accessories for CU/CU effective
stress, General Cell Accessories](#)

Standards

ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T296, AASHTO T297