



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

Contents

www.ele.com
+44 (0) 01525 249 200



This wishlist was generated on 06/12/2017, and contains the following Products:

23-1350

24" Standard Split Tube Sampler

47-0202/11

535 Asphalt Probe

46-4100/01

Loss on Heat/Thin-Film Oven 220-240V 50/60 Hz

34-0620

J-Ring Base



24" Standard Split Tube Sampler

Code: [23-1350](#)

Product Group: [Standard Split Tube Samplers](#)

Specification

O.D	2"
I.D	1-1/2"
Sampler Length	24"
Connection	AW

Alternatives




18" Standard Split Tube Sampler

Code: [23-1346](#)



30" Thin Wall Tube Sampler

Code: [23-1352](#)

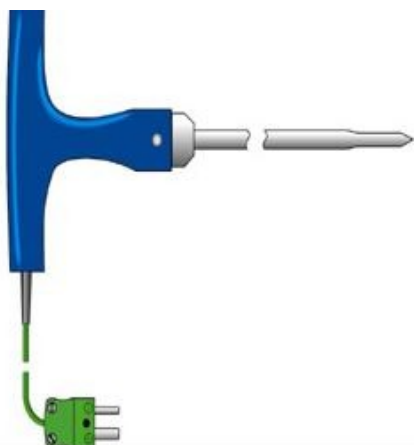

535 Asphalt Probe

Code: [47-0202/11](#)

Product Group: [Digital Asphalt Thermometer](#)

Has a heavy-duty and reinforced needle probe. It is built with a t-shaped polyethylene handle and has a maximum tip temperature of 250°C and a 500 mm long probe.

Standards


BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Max Reading	250°C
Length of probe	500 mm
Tip diameter (needle point)	6 mm



Loss on Heat/Thin-Film Oven 220-240V 50/60 Hz

Code: 46-4100/01

Product Group: Asphalt and Bitumen Ovens

The Thin-Film Oven is used for determining the loss in mass of oil and asphaltic / bituminous compounds when heated with the loss on heating test method or the effect of heat and air on semisolid asphaltic / bituminous materials with the Thin-Film Oven (TFOT) method.

Further Information

Features:

- Complies to the requirements of BS 2000, ASTM D6, D1754 & AASHTO T47, T179
- The exterior is constructed from sheet steel finished in an easy clean powder-coated paint
- Interior chamber is made from stainless steel
- The unit is well insulated and has a double glass door for viewing the test chamber
- The system is controlled by a microprocessor digital controller and overheat thermostat
- Calibrated scale and tamper-proof lock
- Temperature is controlled and pre-set at 163°C +/- 1°C
- Two rotating platforms of 13.5 inches dia are supplied to perform both the tests

Side mounted controls comprise:

- Microprocessor digital control
- Independent overheat thermostat
- Mains switch
- On/Off switch for the turntable motor
- Indicator lamps

Specification

Max Temp (°C)	163
Dimensions: Internal (HxWxD)	380 x 520 x 460 mm
Dimensions: External (HxWxD)	570 x 870 x 630 mm
Insulation	Double wall
Internal material	304 stainless steel
Turntable speed (rpm)	5.5
Max power (W)	1500



J-Ring Base

Code: [34-0620](#)

Product Group: [Concrete Mixture Pre-Qualification](#)

This test has been designed to determine the passing ability (flow-ability) of SCC concrete. Our test set includes a J-Ring fabricated in Zinc Plated steel for rust resistance and a Base Plate made of stainless steel for durability. The base plate includes a return bend lip for easy carrying and includes three concentric circles etched on the base plate to centre the ring.

ASTM C1621/C1621M