



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 25/05/2018, and contains the following Products:

34-4520

100mm Cube Mould 4-Part Clamp Type. Cast Iron Construction. BS EN Compliant.

81-0340

Float - Plasterer's type

34-6575/01

Large Curing Tank C/W with Circulating Pump Heater/Thermostat Unit and Lower Rack

47-0202/10

250 Asphalt Probe

81-0200

Aluminium Scoop Small

23-3000

Riffle Box 7mm Slot Width Complete with Three Containers.

23-3050

Riffle Box 13mm Slot Width Complete with Three Containers.

23-3070

Riffle Box 15mm Slot Width Complete with Three Containers.

23-3100

Riffle Box 19mm Slot Width Complete with Three Containers.

23-3150

Riffle Box 25mm Slot Width Complete with Three Containers.

23-3170

Riffle Box 30mm Slot Width Complete with Three Containers.

23-3200

Riffle Box 38mm Slot Width Complete with Three Containers.

23-3300

Riffle Box 50mm Slot Width Complete with Three Containers.

23-3350

Riffle Box 64mm Slot Width Complete with Three Containers.

81-0590

Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

24-0540

Cone Penetrometer. Complete with Stainless Steel Test Cone.

24-0546

Test Gauge for Checking Condition of Cone Point.

24-0548

Penetration Test Cup.

24-0430

Glass Plate.

81-0100

Spatula 100 mm

81-0120

Spatula 150 mm

81-0140

Spatula 200 mm

81-0180

Chattaway Spatula 125 mm

82-5310

Maximum and Minimum Thermometer

47-0455/01

Vibrating Hammer

24-9010

Straight Edge 300mm.

24-9198

BS Cbr Mould Body.

24-9200

BS Extension Collar

24-9204

BS Solid Base or Top Plate

24-9060

Proctor Mould

24-9002

Standard Compaction Rammer 2.5kg BS1377

24-9004

BS Compaction Rammer 4.5Kg Wt.

47-0480

300 mm Shank

36-5150/01

ADR Touch Control PRO 2000 Auto BS EN Compression Machine

37-5170

EN 12390-3/4 Distance Piece - 80 mm Depth

37-5180

EN 12390-3/4 Distance Piece - 100 mm Depth

34-8100/09

Buoyancy Balance 16Kg X 0.1G

34-8105

Cradle

78-5456/01

Electronic Balance - 4600 g x 0.01 g

78-5527/01

Electronic Balance - 32 000 g x 1.0 g



100mm Cube Mould 4-Part Clamp Type. Cast Iron Construction. BS EN Compliant.

Code: [34-4520](#)

Product Group: [Cube Moulds](#), [Cube Moulds](#)

4-part with clamp attached base plate.

Standards

EN 12390-1, EN 12390-2

Specification

Construction	Bolted sides and clamped base plate
Finish	Painted
Weight	20 lb (9.1 kg)

Accessories



Aluminium Scoop Large

Code: [81-0220](#)



Compacting Bar 25mm Sq X 380mm

Code: [34-2910](#)



Float - Plasterer's type

Code: [81-0340](#)



Mould Oil (25 Litre Drum)

Code: [82-7341](#)



Wire Brush

Code: [81-0705](#)

Spares/Consumables



Soft Headed Mallet.

Code: [29-5020](#)

Alternatives



Vibrating Table 600 X 400mm Table Top. 220-240V 50Hz 1Ph. Supplied with clamping assembly

Code: [34-6250/01](#)



Float - Plasterer's type

Code: [81-0340](#)

Product Group: [Trowels and Floats](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Large Curing Tank C/W with Circulating Pump Heater/Thermostat Unit and Lower Rack

Code: [34-6575/01](#)

Product Group: [Expansion \(swell\) Test Equipment, Large Curing Tank](#)

This Large Curing Tank is supplied complete with a submersible pump, immersion heater/thermostat unit and separate control panel. The tank includes a lower rack as standard and is designed to maintain the temperature at $20 \pm 2^{\circ}\text{C}$, providing that the ambient temperature does not fall below 15°C or rise above 20°C .

Standards

EN 12390-2, ASTM C31, AASHTO T23

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Supplied as specified. For 220 - 240 V AC, 50 - 60 Hz, 1 ph.

Specification

Internal Dimensions	1040 x 1040 x 605 mm (l x w x h)
Capacity	650 litres
Rated Power	2000 watt
Weight	60 kg

Accessories



Maximum and Minimum Thermometer

Code: [82-5310](#)

Alternatives



Jolting Table 220 - 240 V AC 60 Hz

Code: [39-1150/06](#)



250 Asphalt Probe

Code: [47-0202/10](#)

Product Group: [Digital Asphalt Thermometer](#)

Has a heavy-duty and reinforced needle probe. It is built with a t-shaped polyethylene handle and has a maximum tip temperature of 250°C and a 300 mm long probe.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Max Reading	250°C
Length of probe	300 mm
Tip diameter (needle point)	6 mm

Accessories



Breaking Head (Marshall)

Code: [45-6850](#)



Vibrating Hammer

Code: [47-0455/01](#)

Alternatives

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Breaking Head (Marshall)

Code: [45-6850](#)



Vibrating Hammer

Code: [47-0455/01](#)



Aluminium Scoop Small

Code: [81-0200](#)

Product Group: [Scoops and Shovels](#)

82 x 127 x 50 mm, cast aluminium with handle

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 4.5 mm. EN recommended maximum particle size of 3.5 mm. Includes 12 slots each with a 7 mm slot width and an overall approximate capacity of 0.3 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	4.5
Recommended max particle size EN	3.5
Slot width mm	7
No. of slots	12
Approx. capacity kg	0.3
Weight kg	1.5

Alternatives



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 8.5 mm. EN recommended maximum particle size of 6.5 mm. Includes 12 slots each with a 13 mm slot width and an overall approximate capacity of 2 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	8.5
Recommended max particle size EN	6.5
Slot width mm	13
No. of slots	12
Approx. capacity kg	2
Weight kg	6

Alternatives



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 10 mm. EN recommended maximum particle size of 7.5 mm. Includes 12 slots each with a 15 mm slot width and an overall approximate capacity of 2 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	10
Recommended max particle size EN	7.5
Slot width mm	15
No. of slots	12
Approx. capacity kg	2
Weight kg	8

Alternatives



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 12.5 mm. EN recommended maximum particle size of 9.5 mm. Includes 10 slots each with a 19 mm slot width and an overall approximate capacity of 4 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	12.5
Recommended max particle size EN	9.5
Slot width mm	19
No. of slots	10
Approx. capacity kg	4
Weight kg	9

Alternatives



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 16.5 mm. EN recommended maximum particle size of 12.5 mm. Includes 10 slots each with a 25 mm slot width and an overall approximate capacity of 4 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	16.5
Recommended max particle size EN	12.5
Slot width mm	25
No. of slots	10
Approx. capacity kg	4
Weight kg	11.5

Alternatives



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 20 mm. EN recommended maximum particle size of 15 mm. Includes 10 slots each with a 30 mm slot width and an overall approximate capacity of 4 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	20
Recommended max particle size EN	15
Slot width mm	30
No. of slots	10
Approx. capacity kg	4
Weight kg	17.5

Alternatives



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 25 mm. EN recommended maximum particle size of 19 mm. Includes 8 slots each with a 38 mm slot width and an overall approximate capacity of 11 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	25
Recommended max particle size EN	19
Slot width mm	38
No. of slots	8
Approx. capacity kg	11
Weight kg	17.5

Alternatives



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 33 mm. EN recommended maximum particle size of 25 mm. Includes 8 slots each with a 50 mm slot width and an overall approximate capacity of 14 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	33
Recommended max particle size EN	25
Slot width mm	50
No. of slots	8
Approx. capacity kg	14
Weight kg	22.5

Alternatives



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)



Riffle Box 64mm Slot Width Complete with Three Containers.

Code: [23-3350](#)

Product Group: [Riffle Boxes \(Sample Dividers\)](#)

Manufactured from heavy-gauge sheet metal. BS recommended maximum particle size of 42.5 mm. EN recommended maximum particle size of 32 mm. Includes 8 slots each with a 64 mm slot width and an overall approximate capacity of 18 litres.

Standards

BS 1377, BS 1924, BS 812, EN 932-1

Specification

Recommended max particle size BS	42.5
Recommended max particle size EN	32
Slot width mm	64
No. of slots	8
Approx. capacity kg	18
Weight kg	27

Alternatives



Riffle Box 13mm Slot Width Complete with Three Containers.

Code: [23-3050](#)



Riffle Box 15mm Slot Width Complete with Three Containers.

Code: [23-3070](#)



Riffle Box 19mm Slot Width Complete with Three Containers.

Code: [23-3100](#)



Riffle Box 25mm Slot Width Complete with Three Containers.

Code: [23-3150](#)



Riffle Box 30mm Slot Width Complete with Three Containers.

Code: [23-3170](#)



Riffle Box 38mm Slot Width Complete with Three Containers.

Code: [23-3200](#)



Riffle Box 50mm Slot Width Complete with Three Containers.

Code: [23-3300](#)



Riffle Box 7mm Slot Width Complete with Three Containers.

Code: [23-3000](#)



Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

Code: [81-0590](#)

Product Group: [Determination of the Shape Index,](#)
[Miscellaneous Laboratory Hardware](#)

Dual measuring range highly accurate vernier caliper 0 to 200mm x 0.01mm (8 inch x 0.001 inch) to comply with bs 887 and bs 6365. Complete with liquid crystal display.

Standards

EN 933-4

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Vibrating Hammer


Code: [47-0455/01](#)

Alternatives



Vibrating Hammer

Code: [47-0455/01](#)

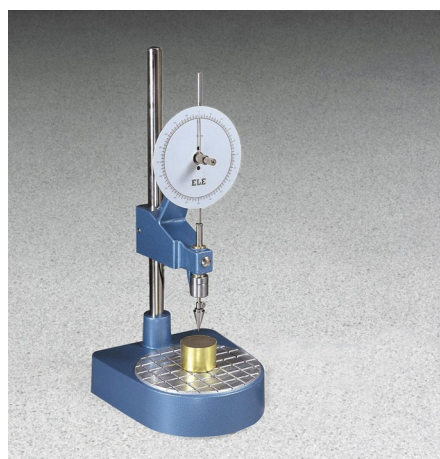

Cone Penetrometer. Complete with Stainless Steel Test Cone.

Code: [24-0540](#)

Product Group: [Cone Penetrometer Method, Cone Penetrometer](#)

Bench mounted apparatus to determine the liquid limit of soils BS1377. This method is applicable to a wide range of soils. The apparatus is fitted with a 150mm diameter dial indicator for direct reading of penetration. Supplied complete with 30deg, 30mm long test cone. Manufactured from stainless steel and includes adjustable levelling feet.

Standards

BS 1377-2

Specification

Dial Indicator	150 mm diameter graduated in 400 x 0.1 mm divisions, indicator point incorporates friction/gear system
Height Adjustment	Rapid, using integral clamping mechanism
Cone release	Manual
Cone	1 x 30°, 35 mm test cone included
Base	Cast aluminium, adjustable levelling feet
Weight kg	7

Accessories



Penetration Test Cup.

Code: [24-0548](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)

Spares/Consumables



Penetration Test Cone

Code: [24-0544](#)

Alternatives



Semi-Automatic Cone Penetrometer

Code: [24-0545/01](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)

Product Group: [Cone Penetrometer Method](#), [Cone Penetrometer](#)

55 mm diameter by 40 mm deep, with the rim parallel to the flat base.

Standards

BS 1377-2



Penetration Test Cup.

Code: [24-0548](#)

Product Group: [Cone Penetrometer Method](#), [Cone Penetrometer](#)

Brass construction, 55mm dia x 40mm depth to fit BS1377

Standards

BS 1377-2



Glass Plate.

Code: [24-0430](#)

Product Group: [Casagrande Method, Determination of Plastic Limit](#)

500 mm square x 10 mm thick.

Standards

BS 1377-2



Spatula 100 mm

Code: [81-0100](#)

Product Group: [Spatulas](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Spatula 150 mm

Code: [81-0120](#)

Product Group: [Spatulas](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Spatula 200 mm

Code: [81-0140](#)

Product Group: [Determination of Plastic Limit, Spatulas](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Vibrating Hammer

Code: [47-0455/01](#)

Alternatives



Vibrating Hammer

Code: [47-0455/01](#)



Chattaway Spatula 125 mm

Code: [81-0180](#)

Product Group: [Spatulas](#)

- Manufactured from stainless steel.
- Bent and rounded end scrapes and lifts materials from bottles and flasks.
- Fits into tight flasks and bottles with necks \geq 4mm diameter.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Maximum and Minimum Thermometer

Code: [82-5310](#)

Product Group: [General-purpose Thermometers](#)

Non hazardous. Range -40 - +50°C

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Vibrating Hammer

Code: [47-0455/01](#)

Product Group: [Percentage Refusal Density \(PRD\)](#)

Accessory - suitable for compacting asphalt samples.

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information


****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



250 Asphalt Probe

Code: [47-0202/10](#)



300 mm Shank

Code: [47-0480](#)



Cradle

Code: [34-8105](#)



Engineer's Steel Rule

Code: [81-0805](#)



Filter Paper - Medium

Code: [82-7901](#)



Paraffin Wax

Code: [82-7031](#)



Spatula 200 mm

Code: [81-0140](#)



Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

Code: [81-0590](#)

Alternatives



250 Asphalt Probe

Code: [47-0202/10](#)



300 mm Shank

Code: [47-0480](#)



Cradle

Code: [34-8105](#)



Engineer's Steel Rule

Code: [81-0805](#)



Filter Paper - Medium

Code: [82-7901](#)



Paraffin Wax

Code: [82-7031](#)




Spatula 200 mm

Code: [81-0140](#)



Vernier Caliper (LCD) Range 0 to 200mm X 0.01mm

Code: [81-0590](#)

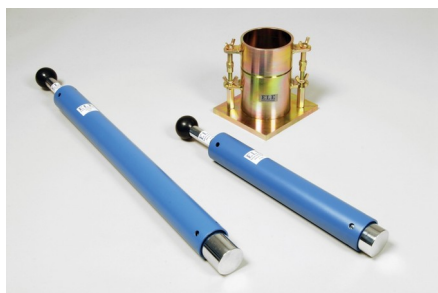

Straight Edge 300mm.

Code: [24-9010](#)

Product Group: [BS/EN compaction test 4.5kg, Proctor compaction, Straightedge](#)

300 mm

Standards

BS 1377-4, BS 1924-2, ASTM D698, ASTM D1557, AASHTO T99, EN 13286-2, EN 13286-4, ASTM D1883, AASHTO T193, ASTM D558, ASTM D559, ASTM D560, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180

Specification

Construction	Flat ground tool steel; beveled edge.
Dimensions	L x W x T (300mm x 40mm x 6mm).
Weight	550g

Accessories



ASTM Compaction Rammer 2.5Kg.

Code: [24-9063](#)

Alternatives



ASTM Compaction Rammer 2.5Kg.

Code: [24-9063](#)



BS Cbr Mould Body.

Code: 24-9198

Product Group: BS EN CBR mould, Accessories for
BS compaction and CBR

Standards

ASTM D1883, AASHTO T193

Specification

Mould	152 x 127 mm (inside diameter x height)
Collar	51 mm height, fits both ends of mould
Base plate	Solid, fits both ends of mould
Construction	All steel, plated
Weight kg	7.3



BS Extension Collar

Code: [24-9200](#)

Product Group: [BS EN CBR mould accessories](#),
[Accessories for BS compaction and CBR](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



BS Solid Base or Top Plate

Code: [24-9204](#)

Product Group: [BS EN CBR mould accessories,](#)
[Accessories for BS compaction and CBR](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2

Accessories



2Kg Annular Surcharge Weight

Code: [24-9214](#)



Base Plate Tool for BS Mould

Code: [24-9210](#)



BS Perforated Base Plate.

Code: [24-9202](#)



Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

Code: [24-9206](#)



Filter Papers 150mm Dia Equivalent to Whatman No 1. Box of 100.

Code: [24-9220](#)

Alternatives



2Kg Annular Surcharge Weight

Code: [24-9214](#)



Base Plate Tool for BS Mould

Code: [24-9210](#)



BS Perforated Base Plate.

Code: [24-9202](#)



Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

Code: [24-9206](#)



Filter Papers 150mm Dia Equivalent to Whatman No 1. Box of 100.

Code: [24-9220](#)



Proctor Mould

Code: 24-9060


Product Group: Accessories for ASTM and Proctor compaction, Proctor compaction

Standards

ASTM D558, ASTM D559, ASTM D560, ASTM D698, ASTM D1557, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180

Specification

Dimensions	101.6 mm dia x 116.4 mm high
Rammer Mould Volume	1/30 ft ³
Construction	All steel, threaded studs with wing nuts, plated.
Weight	5.4 kg

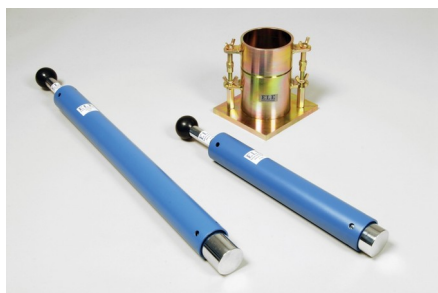

Standard Compaction Rammer 2.5kg BS1377

Code: [24-9002](#)

Product Group: [BS/EN compaction test 2.5kg](#)

50mm diameter with 300mm drop, manufactured from corrosion protected steel.

Standards

BS 1377-4, BS 1924-2

Specification


Rammer	50 mm dia, 2.5 kg
Drop	300 mm
Guide Sleeve	Machined steel tubing with air pressure release holes
Finish	Corrosion resistant
Weight kg	4.2

Alternatives



BS Compaction Rammer 4.5Kg Wt.

Code: [24-9004](#)

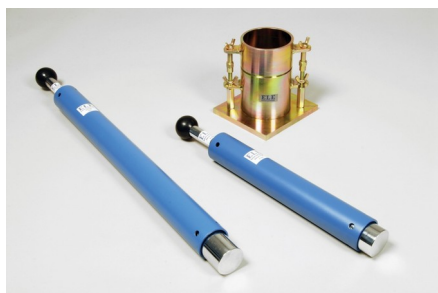

BS Compaction Rammer 4.5Kg Wt.

Code: [24-9004](#)

Product Group: [BS/EN compaction test 4.5kg, Straightedge](#)

50mm diameter with 450mm drop, manufactured from corrosion protected steel.


Standards

BS 1377-4, BS 1924-2

Specification

Rammer	50 mm dia, 4.5 kg
Drop	450 mm
Guide Sleeve	Machined steel tubing with air pressure release holes
Finish	Corrosion resistant
Weight kg	7.5


Accessories



Straight Edge 300mm.

Code: [24-9010](#)

Alternatives



Standard Compaction Rammer 2.5kg BS1377

Code: [24-9002](#)



300 mm Shank

Code: [47-0480](#)

Product Group: [Percentage Refusal Density \(PRD\)](#)

Complete with tamping feet - 102 mm and 146 mm dia.

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Vibrating Hammer

Code: [47-0455/01](#)

Alternatives



Vibrating Hammer

Code: [47-0455/01](#)



ADR Touch Control PRO 2000 Auto BS EN Compression Machine

Code: [36-5150/01](#)

Product Group: [BS EN Compression Machines](#)

The ADR Touch Control PRO 2000 Auto BS EN is supplied complete with self-centring lower platen and safety gates fitted with interlock switches ready for testing 300 x 150 mm diameter cylinders. When used for cube testing distance pieces (EN) of the appropriate size must be ordered separately.

Standards

EN 12350-6, NF P18-411, EN 12390-4, EN 12390-3, EN 772-1, BS EN ISO 7500-1, ASTM E4

Further Information

****Not available for sale in the USA****

The ADR Touch Control PRO will deliver all the features and quality of the established ADR-Auto range, with its 20 year history, but with a new sleek design and additional capabilities. The console assembly consists of an ADR Touch Control Pro and power base which can be used with all existing concrete and cement frames

USER INTERFACE

The new ADR Touch Control PRO has an improved user interface providing a high quality platform for testing that will enhance the performance of our compression machines. It now has a larger 7-inch colour touch screen with a higher definition display, allowing easier observation of test progress. A favourites option is also available, allowing users to save the most common set-ups for immediate access, without the need for navigating through selection menus.

USER FLEXIBILITY

The ADR Touch Control PRO has a unique flexible head with rotation capabilities of 75-degrees and a 45-degree tilt, improving usability and comfort for individual users. It is available with four languages English, Spanish, Portuguese and French, making it even more user-friendly and accessible to a wider audience. The new LAN connectivity feature lets the operator use the PC based APP (ELE Logger) to download test results away from the test area. User flexibility has also increased with the new ADR Touch Control PRO as it can now be operated remotely, so tests can be initiated away from the test area. Many issues can be resolved quickly by our service team through the new remote diagnostics feature and updating to the latest version of software has never been easier.

COMPATIBILITY

The all new dual sensor capabilities allow users to test both concrete and cement samples on one frame. The ADR Touch Control PRO is compatible with all existing compression frames and upgrade kits are also available. The upgrade kits can be used to convert existing ADR-Auto consoles to the new Automatic Digital Control Readout.

TESTING TIMES

The new generation ADR Compression Machines have an increased control over the pace rate, which allows users to run the pace rate higher than average, but still within standard. This produces an average time saving of 10% for a typical 150mm cube sample.

ELECTRICAL

Reduced component count and no wire design results in increased reliability and serviceability. New low voltage interlocks and e-stop has increased safety. The ADR Touch Control PRO has the latest Arm Core Processor technology which has improved the processing power and speed.

Specification

Capacity	2000 kN
Cubes (Concrete)	Up to 200 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	Via optional Platen Handling System
TFV and ACV	Yes
Voltage Supply	220-240 V 50 Hz 1 Ph
Frame Type	Welded
Max vert. Clearance	375 mm
Max hor. Clearance	355 mm
Platen Sizes	Lower 220mm sq, Upper 300mm dia
Max Ram Travel	50 mm

Accessories



100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 50 Hz, 1 ph

Code: [37-6135/01](#)



100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 60 Hz, 1 ph

Code: [37-6135/06](#)



2000 kN Load Calibration Device complete with Handheld Readout Unit & Calibration Certificate ISO376

Code: [37-8315](#)



300mm Lower Brick Platen

Code: [37-4842](#)




BS Block Platens & Platen Handling Assembly for 2000kN & 3000kN BS Frames.

Code: [37-4830](#)




EN 12390-3/4 Distance Piece - 100 mm Depth

Code: [37-5180](#)




EN 12390-3/4 Distance Piece - 20 mm Depth

Code: [37-5110](#)



EN 12390-3/4 Distance Piece - 50 mm Depth

Code: [37-5120](#)



EN 12390-3/4 Distance Piece - 60 mm Depth

Code: [37-5140](#)



Flexible Hose

Code: [5038B0027](#)



Impact Printer Rs232 Serial Connection. Supplied Complete with 1 Paper Roll.

Code: [37-4859/01](#)

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output

Code: [6014A0062](#)

Alternatives



ADR Touch Control PRO 2000 Auto BS EN Compression Machine

Code: [36-5150/06](#)



ADR Touch Control PRO 3000 Auto BS EN Compression Machine

Code: [36-5165/01](#)



ADR Touch Control PRO 3000 Auto BS EN Compression Machine

Code: [36-5165/06](#)



EN 12390-3/4 Distance Piece - 80 mm Depth

Code: [37-5170](#)


Product Group: [Distance Pieces](#)

Standards

EN 12390-3, BS 1881-115

Further Information

****Not available for sale in the USA****

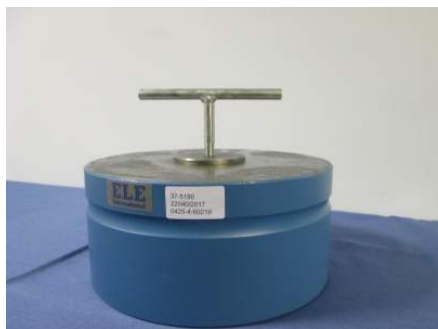

EN 12390-3/4 Distance Piece - 100 mm Depth

Code: [37-5180](#)

Product Group: [Distance Pieces](#)

Standards

BS 1881-115, EN 12390-3

Further Information

****Not available for sale in the USA****



Buoyancy Balance 16Kg X 0.1G

Code: [34-8100/09](#)

Product Group: [Hardened Concrete - Buoyancy Balance, Percentage Refusal Density \(PRD\)](#)

Includes:

- Lifting frame for Buoyancy balances
- Expansion tank 4 gallon capacity
- Electronic Balance 16kg x 0.1g with auto density calculation

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Cradle

Code: [34-8105](#)

Spares/Consumables



Expansion Tank 4 Gallon Capacity

Code: [9004X0058](#)



Cradle

Code: [34-8105](#)

Product Group: [ELE Bouyancy Balance](#), [Hardened Concrete - Buoyancy Balance](#), [Percentage Refusal Density \(PRD\)](#)

Standards

EN 12697-32, EN 13280-4, BS 598-104, EN 1097-6

Accessories



Vibrating Hammer

Code: [47-0455/01](#)

Alternatives



Vibrating Hammer

Code: [47-0455/01](#)



Electronic Balance - 4600 g x 0.01 g

Code: [78-5456/01](#)

Product Group: [Electronic Balances](#)

Further Information

****Not available for sale in the USA****

Specification

Capacity resolution	4500 g x 0.01 g
Pan size	160 x 160 mm
Mains and battery	No
Dimensions (w x d x h)	220 x 310 x 90 mm
Weight	6 kg
Weighing units	g, kg, lb, lb:oz, oz, ozt, T, custom unit.
Repeatability	0.02 g
Power supply	100-240V, 50/60Hz, 1pH



Electronic Balance - 32 000 g x 1.0 g

Code: [78-5527/01](#)

Product Group: [Electronic Balances](#)

Further Information

****Not available for sale in the USA****

Specification

Capacity resolution	32000 g x 1.0 g
Pan size	225 x 275 mm
Mains and battery	Yes
Dimensions (w x d x h)	315 x 355 x 110 mm
Weight	6 kg
Weighing units	g, kg, lb, lb:oz, oz
Repeatability	1 g
Power supply	230AC, 50/60Hz, 10 watts