



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 30/05/2018, and contains the following Products:

45-6850

Breaking Head (Marshall)

45-6890

Flow Meter ASTM

47-0011

Calibrated Spring Balance

47-0012

Tray and Chains

47-0202

Digital Asphalt Thermometer

82-5243

Portable Thermometer 50 to 250°C

47-0202/10

250 Asphalt Probe

47-5175

Compact Core Drill

47-5565

Core Barrel 100 mm

47-5605

Core Barrel 150 mm

79-2645

300mm Dia BS Sieve 40.0mm Perforated Plate

79-2640

300mm Dia BS Sieve 37.5mm Perforated Plate.

79-2615

300mm Dia BS Sieve 28.0mm Perforated Plate.

79-2595

300mm Dia BS Sieve 20.0mm Perforated Plate.

Contents

www.ele.com
+44 (0) 01525 249 200



79-2575

300mm Dia BS Sieve 14.0mm Perforated Plate.

79-2555

300mm Dia BS Sieve 10.0mm Perforated Plate.

79-2525

300mm Dia BS Sieve 6.30mm Perforated Plate.

79-2515

300mm Dia BS Sieve 5.00mm Perforated Plate.

79-6350

12in Dia ASTM Sieve 63.0mm Stainless Steel Mesh

79-6330

12in Dia ASTM Sieve 50.0mm Stainless Steel Mesh.

79-6310

12in Dia ASTM Sieve 37.5mm Stainless Steel Mesh.

79-6280

12in Dia ASTM Sieve 25.0mm Stainless Steel Mesh.

79-6260

12in Dia ASTM Sieve 19.0mm Stainless Steel Mesh.

79-6230

12in Dia ASTM Sieve 12.5mm Stainless Steel Mesh

79-6210

12in Dia ASTM Sieve 9.50mm Stainless Steel Mesh.

79-5820

12in Dia ASTM Sieve 4.75mm Stainless Steel Mesh. Non Standard Frame.

79-5860

12in Dia ASTM Sieve 2.36mm Stainless Steel Mesh.

79-5870

12in Dia ASTM Sieve 2.0mm Stainless Steel Mesh.

79-5880

12in Dia ASTM Sieve 1.70mm Stainless Steel Mesh.

79-5900

12in Dia ASTM Sieve 1.18mm Stainless Steel Mesh.

79-5940

12in Dia ASTM Sieve 600Mic Stainless Steel Mesh.

79-5960

12in Dia ASTM Sieve 425Mic Stainless Steel Mesh.

79-5980

12in Dia ASTM Sieve 300Mic Stainless Steel Mesh.

79-6020

12in Dia ASTM Sieve 150Mic Stainless Steel Mesh.

79-6060

12in Dia ASTM Sieve 75 Mic Stainless Steel Mesh.

79-6300

12in Dia ASTM Sieve 31.5mm Stainless Steel Mesh.

79-6250

12in Dia ASTM Sieve 16.0mm Stainless Steel Mesh.

79-6200

12in Dia ASTM Sieve 8.00mm Stainless Steel Mesh.

79-5830

12in Dia ASTM Sieve 4.00mm Stainless Steel Mesh.

79-6160

12in Dia Receiver ASTM.

81-0100

Spatula 100 mm

81-0120

Spatula 150 mm

82-1840

Measuring Cylinder - Plastic 100 ml

82-0500

Measuring Cylinder - Glass 1000 ml

82-1860

Measuring Cylinder - Plastic 250 ml

82-1900

Measuring Cylinder - Plastic 1000 ml

42-5315/01

Los Angeles Abrasion Machine Meets ASTM and European Standards. 220-240V 50Hz 1Ph.

81-0521

Stopwatch

36-0720/01

ADR Touch 1500 Compression Machine with Digital Readout.

37-4980

Standard Distance Piece - 20 mm Depth



Breaking Head (Marshall)

Code: [45-6850](#)

Product Group: [Accessories for the Marshall test](#)

Complete with gauge disc. Supplied without flow meter.

Standards

EN 12697-34

Accessories



250 Asphalt Probe

Code: [47-0202/10](#)



30 L Heating Bath with Led Display Cover

Code: [45-6550/01](#)



50kN S-type Load Cell

Code: [27-1559](#)

Alternatives



250 Asphalt Probe

Code: [47-0202/10](#)



30 L Heating Bath with Led Display Cover

Code: [45-6550/01](#)



50kN S-type Load Cell

Code: [27-1559](#)



Flow Meter ASTM

Code: [45-6890](#)

Product Group: [Accessories for the Marshall test](#)

Dial gauge graduated 0.001 inches with 1 inch travel.
Supplied with stem brake unit and flow meter pedestal.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Calibrated Spring Balance

Code: [47-0011](#)

Product Group: [Rate of Spread of Coated Chippings](#)

Standards

EN 12272-1, BS 598-108

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Tray and Chains

Code: [47-0012](#)

Product Group: [Rate of Spread of Coated Chippings](#)

Comprising one 300 mm square tray and four chains.

Standards

EN 12272-1, BS 598-108

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Digital Asphalt Thermometer

Code: [47-0202](#)

Product Group: [Digital Asphalt Thermometer](#)

Comprises a hand-held digital thermometer with an operating range of -99 to +1372 °C with a switchable resolution between 0.1 and 1.0 °C. Operates on a 9V battery and utilises K-type thermocouple sensors.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Range	-50 to 1000°C
Resolution	Switchable 0.1 or 1.0°C
Weight	300 g

Accessories



250 Asphalt Probe

Code: [47-0202/10](#)



Breaking Head (Marshall)

Code: 45-6850



Vibrating Hammer

Code: 47-0455/01

Alternatives




Marshall Test 50

Code: 45-6810/01



Marshall Test 50

Code: 45-6810/06

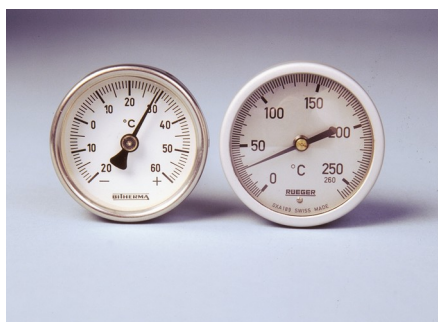

Portable Thermometer 50 to 250°C

Code: [82-5243](#)

Product Group: [Portable Dial-type Thermometers](#)

64 mm diameter dial with a 650 mm long stem.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



250 Asphalt Probe

Code: [47-0202/10](#)

Product Group: [Digital Asphalt Thermometer](#)

Has a heavy-duty and reinforced needle probe. It is built with a t-shaped polyethylene handle and has a maximum tip temperature of 250°C and a 300 mm long probe.

Standards

BS 2000-49, EN 1426, EN 13179-2, ASTM D5, AASHTO T49, IP 49

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Max Reading	250°C
Length of probe	300 mm
Tip diameter (needle point)	6 mm

Accessories



Breaking Head (Marshall)

Code: [45-6850](#)



Vibrating Hammer

Code: [47-0455/01](#)

Alternatives



Breaking Head (Marshall)

Code: [45-6850](#)



Vibrating Hammer

Code: [47-0455/01](#)



Compact Core Drill

Code: 47-5175

Product Group: Compact Core Drill Machine

This compact and portable core drilling machine is designed to cut cores up to 150 mm diameter from concrete, asphalt and similar hard construction material.

The machine comprises a vertical support column which carries the drill head/motor assembly.

An integral water swivel is built into the drill head providing a 12 mm connection to an external water supply via 12 mm flexible hose (not supplied). The motor assembly comprises a 4 hp, 2-stroke petrol engine. Speeds of 800 rpm or 1200 rpm may be selected. A ball screw mechanism enables close control over drilling pressure and rapid return when drilling is completed.

The complete assembly is supplied on a rigid metal base frame with levelling facility and is suitable for vertically down drilling applications only.

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Special Note: Requires a continuous clean water supply via a 12 mm flexible hose (not supplied).



Core Barrel 100 mm

Code: [47-5565](#)

Product Group: [Core Barrels](#)

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Core Barrel 150 mm

Code: [47-5605](#)

Product Group: [Core Barrels](#)

Standards

EN 12697-32, EN 13280-4, BS 598-104

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



300mm Dia BS Sieve 40.0mm Perforated Plate

Code: 79-2645

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

NOT AVAILABLE FOR SALE IN THE USA



300mm Dia BS Sieve 37.5mm Perforated Plate.

Code: 79-2640

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



300mm Dia BS Sieve 28.0mm Perforated Plate.

Code: 79-2615

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



300mm Dia BS Sieve 20.0mm Perforated Plate.

Code: 79-2595

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

NOT AVAILABLE FOR SALE IN THE USA



300mm Dia BS Sieve 14.0mm Perforated Plate.

Code: 79-2575

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

NOT AVAILABLE FOR SALE IN THE USA



300mm Dia BS Sieve 10.0mm Perforated Plate.

Code: 79-2555

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

NOT AVAILABLE FOR SALE IN THE USA



300mm Dia BS Sieve 6.30mm Perforated Plate.

Code: 79-2525

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



300mm Dia BS Sieve 5.00mm Perforated Plate.

Code: 79-2515

Product Group: 300mm Diameter BS Sieves, 300mm Diameter BS Sieves, 300mm Diameter BS Sieves

Standards

BS 410-1, ISO 3310, ISO 565, EN933-2

Further Information

NOT AVAILABLE FOR SALE IN THE USA



12in Dia ASTM Sieve 63.0mm Stainless Steel Mesh

Code: 79-6350

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	2-1/2"
Sieve Opening Standard	63 mm
Sieve Opening Alternative (in.)	2.5



12in Dia ASTM Sieve 50.0mm Stainless Steel Mesh.

Code: 79-6330

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	2"
Sieve Opening Standard	50 mm
Sieve Opening Alternative (in.)	2



12in Dia ASTM Sieve 37.5mm Stainless Steel Mesh.

Code: 79-6310

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	1-1/2"
Sieve Opening Standard	38.1 mm
Sieve Opening Alternative (in.)	1.5



12in Dia ASTM Sieve 25.0mm Stainless Steel Mesh.

Code: 79-6280

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	1"
Sieve Opening Standard	25.0 mm
Sieve Opening Alternative (in.)	1



12in Dia ASTM Sieve 19.0mm Stainless Steel Mesh.

Code: 79-6260

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	3/4"
Sieve Opening Standard	19.0 mm
Sieve Opening Alternative (in.)	0.75



12in Dia ASTM Sieve 12.5mm Stainless Steel Mesh

Code: 79-6230

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	1/2"
Sieve Opening Standard	12.5 mm
Sieve Opening Alternative (in.)	0.5



12in Dia ASTM Sieve 9.50mm Stainless Steel Mesh.

Code: 79-6210

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	3/8"
Sieve Opening Standard	9.5 mm
Sieve Opening Alternative (in.)	0.375



12in Dia ASTM Sieve 4.75mm Stainless Steel Mesh. Non Standard Frame.

Code: 79-5820

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 4
Sieve Opening Standard	4.75 mm
Sieve Opening Alternative (in.)	0.187



12in Dia ASTM Sieve 2.36mm Stainless Steel Mesh.

Code: 79-5860

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 7
Sieve Opening Standard	2.36 mm
Sieve Opening Alternative (in.)	0.0937



12in Dia ASTM Sieve 2.0mm Stainless Steel Mesh.

Code: 79-5870

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 10
Sieve Opening Standard	2.00 mm
Sieve Opening Alternative (in.)	0.0787



12in Dia ASTM Sieve 1.70mm Stainless Steel Mesh.

Code: 79-5880

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 12
Sieve Opening Standard	1.70 mm
Sieve Opening Alternative (in.)	0.0661



12in Dia ASTM Sieve 1.18mm Stainless Steel Mesh.

Code: 79-5900

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 16
Sieve Opening Standard	1.18 mm
Sieve Opening Alternative (in.)	0.0469



12in Dia ASTM Sieve 600Mic Stainless Steel Mesh.

Code: 79-5940

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 30
Sieve Opening Standard	600 μ m
Sieve Opening Alternative (in.)	0.0234



12in Dia ASTM Sieve 425Mic Stainless Steel Mesh.

Code: 79-5960

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 40
Sieve Opening Standard	425 um
Sieve Opening Alternative (in.)	0.0165



12in Dia ASTM Sieve 300Mic Stainless Steel Mesh.

Code: 79-5980

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 50
Sieve Opening Standard	300 um
Sieve Opening Alternative (in.)	0.0117



12in Dia ASTM Sieve 150Mic Stainless Steel Mesh.

Code: 79-6020

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 100
Sieve Opening Standard	150 um
Sieve Opening Alternative (in.)	0.0059



12in Dia ASTM Sieve 75 Mic Stainless Steel Mesh.

Code: 79-6060

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 200
Sieve Opening Standard	75 um
Sieve Opening Alternative (in.)	0.0029



12in Dia ASTM Sieve 31.5mm Stainless Steel Mesh.

Code: 79-6300

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	1-1/4"
Sieve Opening Standard	31.5 mm
Sieve Opening Alternative (in.)	1.25



12in Dia ASTM Sieve 16.0mm Stainless Steel Mesh.

Code: 79-6250

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	5/8"
Sieve Opening Standard	16.0 mm
Sieve Opening Alternative (in.)	0.625



12in Dia ASTM Sieve 8.00mm Stainless Steel Mesh.

Code: 79-6200

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	5/16"
Sieve Opening Standard	8.0 mm
Sieve Opening Alternative (in.)	0.312



12in Dia ASTM Sieve 4.00mm Stainless Steel Mesh.

Code: 79-5830

Product Group: 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11

Specification

Frames	Full height; 3-1/4" (82.5 mm) depth to mesh.
Construction	Polished and lacquered brass with S.S. mesh.
Nameplates	Show standard, alternate and Tyler Screen Scale equivalent designations.
Weights	Net 4 lbs. (1.8 kg).
Sieve Size or Number	No. 5
Sieve Opening Standard	4.00 mm
Sieve Opening Alternative (in.)	0.157



12in Dia Receiver ASTM.

Code: 79-6160

Product Group: Sieve Lids and Receivers ASTM, 12in Dia ASTM Brass Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves, 12" Diameter ASTM Sieves

Standards

ASTM E11



Spatula 100 mm

Code: [81-0100](#)

Product Group: [Spatulas](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****




Spatula 150 mm

Code: [81-0120](#)

Product Group: [Spatulas](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

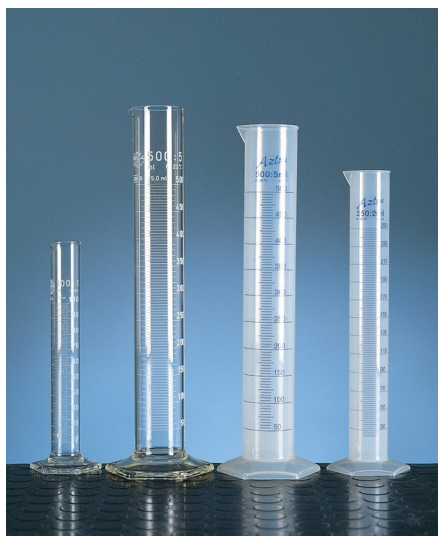

Measuring Cylinder - Plastic 100 ml

Code: [82-1840](#)

Product Group: [Measuring Cylinders, BS](#)

Plastic with spout, graduated to BS 5404.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Measuring Cylinder - Glass 1000 ml


Code: [82-0500](#)

Product Group: [Measuring Cylinders, BS](#)

Soda glass, spouted, BS EN 4788.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

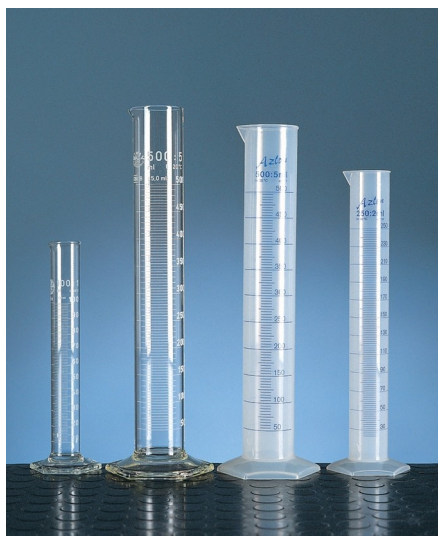

Measuring Cylinder - Plastic 250 ml


Code: [82-1860](#)

Product Group: [Measuring Cylinders, BS](#)

Plastic with spout, graduated to BS 5404.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

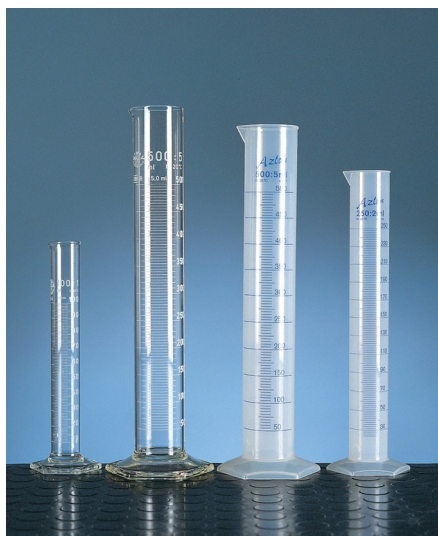

Measuring Cylinder - Plastic 1000 ml

Code: [82-1900](#)

Product Group: [Measuring Cylinders, BS](#)

Plastic with spout, graduated to BS 5404.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Los Angeles Abrasion Machine Meets ASTM and European Standards. 220-240V 50Hz 1Ph.

Code: [42-5315/01](#)

Product Group: [Los Angeles Abrasion Machine](#), [Los Angeles Abrasion Machine](#)

The machine consists of a closed hollow cylindrical steel drum rotating around its horizontal axis on ball bearing units mounted on a sturdy base framework.

The drum is driven at a speed of between 30 - 33 rpm via an enclosed belt drive arrangement from an electric motor/gearbox unit situated on the base frame. Inside the drum a full length steel shelf is attached, accessed by a dust-proof opening.

The cylinder incorporates a removable internal shelf, one shelf position is provided to meet the requirements of both the ASTM and EN test standards.

Controls are located easily on the right-hand side of the machine at convenient operator height.

Start and stop push buttons and a subtracting revolution counter allows the user to preset the number of revolutions before an automatic stop.

Standards

EN 1097-2, ASTM C131, ASTM C535, AASHTO T96, NF P18-573

Further Information

For 220 - 240 V AC, 50 Hz, 1ph.

Specification

Capacity	5,000 g each of aggregate and charge.
Drum Speed	30-33 rpm.
Frame	Welded structural steel.
Counter	Adjustable; automatic shut-off; push-button reset and adjustment.
Controls	Magnetic motor starter with overload protection and integral On-Off switches.
Dimensions	38.6" w. x 36.2" d. x 38.6" h. (980 x 920 x 980 mm).
Weight	Net 882 lbs. (400 kg).

Motor

1 HP

Accessories

Set of 12 Abrasive Charges (ASTM).

Code: [42-5300/10](#)



Set of 12 Abrasive Charges EN)

Code: [42-5305/10](#)



Alternatives



Los Angeles Abrasion Machine Meets ASTM and European Standards. 220-240V 60Hz 1Ph.

Code: [42-5315/06](#)



Los Angeles Abrasion Machine with CE Safety Cabinet W/ Microswitches. 220-240V 50Hz 1Ph.

Code: [42-5310/01](#)



Los Angeles Abrasion Machine with CE Safety Cabinet W/ Microswitches. 220-240V 60Hz 1Ph.

Code: [42-5310/06](#)



Stopwatch

Code: [81-0521](#)

Product Group: [Watches and Clocks](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (mm)

64 x 53 x 19



ADR Touch 1500 Compression Machine with Digital Readout.

Code: 36-0720/01

Product Group: General Purpose Compression Machines

- 1560 kN/350 000 lbf capacity
- Calibration accuracy to BS EN ISO 7500-1; ASTM E4;
- Efficient hydraulic power packs
- Economic machines ideal for site use

The Compact 1500 range of compression machines has been designed to meet the need for a simple, economic and reliable means of testing concrete.

SPECIMEN CAPACITY

The dimensions of the frame allow the testing of cylinders up to 320 mm long x 160 mm diameter, and cubes 150 or 100 mm square. Kerbs and flagstones may also be tested on the ADR machine as well as 150 mm and 100 mm square section beams to ASTM C78, using the optional 100 kN flexural frames which are connected to the power pack.

LOAD INDICATION

The ADR digital readout is a microprocessor controlled instrument, which is fitted as standard to all digital machines in the range. Load can be displayed in kN, lbf or kgf as selected by the operator.

Standards

BS EN ISO 7500-1, ASTM E4

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

The Standard range of compression machines has been designed to meet the need for a simple, economic and reliable means of testing concrete.

Whilst delivering all the features and reputation of the established ADR Series with its extensive design history, the new and improved user interface provides a high quality platform for testing that enhances the performance of ELE's compression machines.

New, sophisticated electronics further the benefits of simplified operation, whilst delivering the highest levels of accuracy in testing concrete and cement/mortar samples, satisfying the needs of Quality Control Managers, Lab Managers and Technicians.

ACCURACY & SAVINGS

The new ADR Touch Series, with 145mm (5.7") high resolution QVGA touch screen interface and intuitive menu-driven operation, reduces the time taken to set up the machine and perform tests, reducing the time to train staff by up to 25%.

- Up to 6 sample types can be set as favorites, enabling one-touch set up for repeat testing.

- Full, QWERTY touch pad for input of test data.

Most testing errors produce lower strength results. Noncompliant loading rates can generate errors in measured strength. The user interface includes real-time display of load vs. time, further ensuring accurate and consistent test results and providing "goodness of test" data to improve traceability in your QC operations.

TRACEABILITY & DATA QUALITY

The ADR range now provides improved data quality and traceability in due diligence cases - it is now possible to demonstrate traceability all the way from the machine/user to the accreditation body, increasing your reputation and peace of mind - all test results now come complete with the machine serial number attached.

- Enhanced USB data communications between PC and machine - eliminating the need for download software.
- Two gigabytes of storage memory.
- Full customization of sample sizes - stress calculations are automatically recalculated.


USER SAFETY

With full safety gates as standard, total systems diagnostics, ram run-out switches and overload warnings ensure the safety of your employees and the reliability of your machine.

Specification

Testing Standards	BS EN ISO 7500-1, ASTM E4
Capacity	1500 kN
Cubes (Concrete)	Up to 150 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	n/a
Flexural Testing	Via Flexural Frame
TFV and ACV	Yes
Voltage Supply	220-240V 50/60 Hz 1Ph.
Frame Type	Welded
Max vert. Clearance	340 mm
Max hor. Clearance	325 mm
Platen Sizes	Lower, Upper 222 mm
Max Ram Travel	50 mm

Accessories



100kN Flexural Fitting Kit (ADR) Used for Connecting Flexural Frames to ADR Compression Machines.

Code: [37-6138](#)



2000 kN Load Calibration Device complete with Handheld Readout Unit & Calibration Certificate ISO376

Code: [37-8315](#)



ADR Touch Head for Compression Machines

Code: [37-5951/09](#)



Impact Printer Rs232 Serial Connection. Supplied Complete with 1 Paper Roll.

Code: [37-4859/01](#)



Standard Distance Piece - 100 mm Depth

Code: [37-5100](#)



Standard Distance Piece - 20 mm Depth

Code: [37-4980](#)



Standard Distance Piece - 50 mm Depth

Code: [37-5000](#)



Standard Distance Piece - 60 mm Depth

Code: [37-5020](#)



Standard Distance Piece - 80 mm Depth

Code: [37-5050](#)

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output

Code: [6014A0062](#)

Alternatives



ADR Touch 2000 Standard Compression Machine with Digital Readout.

Code: [36-3090/01](#)



Standard Distance Piece - 20 mm Depth

Code: [37-4980](#)

Product Group: [Distance Pieces](#)

Further Information

****Not available for sale in the USA****