



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 21/06/2018, and contains the following Products:

36-5150/01

ADR Touch Control PRO 2000 Auto BS EN Compression Machine

37-5110

EN 12390-3/4 Distance Piece - 20 mm Depth

37-5120

EN 12390-3/4 Distance Piece - 50 mm Depth

37-5170

EN 12390-3/4 Distance Piece - 80 mm Depth

37-5180

EN 12390-3/4 Distance Piece - 100 mm Depth

37-6130

100kN Flexural (Beams) Frame. Supplied Without Specimen Bearers and Fitting Kit.

37-6135/01

100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 50 Hz, 1 ph

37-6131

BS 1881 Specimen Bearer Assembly 38mm Dia X 160mm Length.

37-6133

Ball Seating Assembly 150mm Dia Platens.

25-3700/01

MultiPlex 50 Load Frame

27-1300/01

DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

27-1551

S-Type Load Cell 5 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

39-6160

Flexural Jig Assembly



ADR Touch Control PRO 2000 Auto BS EN Compression Machine

Code: [36-5150/01](#)

Product Group: [BS EN Compression Machines](#)

The ADR Touch Control PRO 2000 Auto BS EN is supplied complete with self-centring lower platen and safety gates fitted with interlock switches ready for testing 320 x 160 mm diameter cylinders. When used for cube testing distance pieces (EN) of the appropriate size must be ordered separately.

Standards

EN 12350-6, NF P18-411, EN 12390-4, EN 12390-3, EN 772-1, BS EN ISO 7500-1, ASTM E4

Further Information

****Not available for sale in the USA****

The ADR Touch Control PRO will deliver all the features and quality of the established ADR-Auto range, with its 20 year history, but with a new sleek design and additional capabilities. The console assembly consists of an ADR Touch Control Pro and power base which can be used with all existing concrete and cement frames

USER INTERFACE

The new ADR Touch Control PRO has an improved user interface providing a high quality platform for testing that will enhance the performance of our compression machines. It now has a larger 7-inch colour touch screen with a higher definition display, allowing easier observation of test progress. A favourites option is also available, allowing users to save the most common set-ups for immediate access, without the need for navigating through selection menus.

USER FLEXIBILITY

The ADR Touch Control PRO has a unique flexible head with rotation capabilities of 75-degrees and a 45-degree tilt, improving usability and comfort for individual users. It is available with four languages English, Spanish, Portuguese and French, making it even more user-friendly and accessible to a wider audience. The new LAN connectivity feature lets the operator use the PC based APP (ELE Logger) to download test results away from the test area. User flexibility has also increased with the new ADR Touch Control PRO as it can now be operated remotely, so tests can be initiated away from the test area. Many issues can be resolved quickly by our service team through the new remote diagnostics feature and updating to the latest version of software has never been easier.

COMPATIBILITY

The all new dual sensor capabilities allow users to test both concrete and cement samples on one frame. The ADR Touch Control PRO is compatible with all existing compression frames and upgrade kits are also available. The upgrade kits can be used to convert existing ADR-Auto consoles to the new Automatic Digital Control Readout.

TESTING TIMES

The new generation ADR Compression Machines have an increased control over the pace rate, which allows users to run the pace rate higher than average, but still within standard. This produces an average time saving of 10% for a typical 150mm cube sample.

ELECTRICAL

Reduced component count and no wire design results in increased reliability and serviceability. New low voltage interlocks and e-stop has increased safety. The ADR Touch Control PRO has the latest Arm Core Processor technology which has improved the processing power and speed.

Specification

Capacity	2000 kN
Cubes (Concrete)	Up to 200 mm
Cylinders (Concrete)	Up to 320 x 160 mm
Blocks	Via optional Platen Handling System
TFV and ACV	Yes
Voltage Supply	220-240 V 50 Hz 1 Ph
Frame Type	Welded
Max vert. Clearance	375 mm
Max hor. Clearance	355 mm
Platen Sizes	Lower 220mm sq, Upper 300mm dia
Max Ram Travel	50 mm

Accessories



100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 50 Hz, 1 ph

Code: [37-6135/01](#)



100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 60 Hz, 1 ph

Code: [37-6135/06](#)



2000 kN Load Calibration Device complete with Handheld Readout Unit & Calibration Certificate ISO376

Code: [37-8315](#)




300mm Lower Brick Platen

Code: [37-4842](#)




BS Block Platens & Platen Handling Assembly for 2000kN & 3000kN BS Frames.

Code: [37-4830](#)




EN 12390-3/4 Distance Piece - 100 mm Depth

Code: [37-5180](#)




EN 12390-3/4 Distance Piece - 20 mm Depth

Code: [37-5110](#)



EN 12390-3/4 Distance Piece - 50 mm Depth

Code: [37-5120](#)



EN 12390-3/4 Distance Piece - 60 mm Depth

Code: [37-5140](#)



Flexible Hose

Code: [5038B0027](#)



Impact Printer Rs232 Serial Connection. Supplied Complete with 1 Paper Roll.

Code: [37-4859/01](#)

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output

Code: [6014A0062](#)

Alternatives



ADR Touch Control PRO 2000 Auto BS EN Compression Machine

Code: [36-5150/06](#)




ADR Touch Control PRO 3000 Auto BS EN Compression Machine

Code: [36-5165/01](#)



ADR Touch Control PRO 3000 Auto BS EN Compression Machine

Code: [36-5165/06](#)

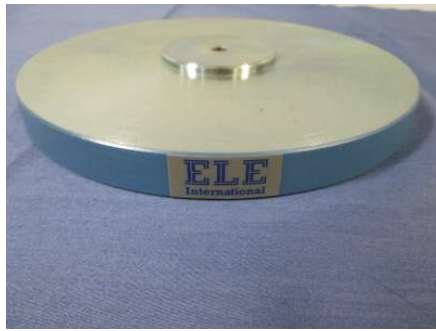

EN 12390-3/4 Distance Piece - 20 mm Depth

Code: [37-5110](#)

Product Group: [Distance Pieces](#)

Standards

EN 12390-3, BS 1881-115

Further Information

Not available for sale in the USA



EN 12390-3/4 Distance Piece - 50 mm Depth

Code: [37-5120](#)

Product Group: [Distance Pieces](#)

Standards

EN 12390-3, BS 1881-115

Further Information

****Not available for sale in the USA****



EN 12390-3/4 Distance Piece - 80 mm Depth

Code: [37-5170](#)


Product Group: [Distance Pieces](#)

Standards

EN 12390-3, BS 1881-115

Further Information

****Not available for sale in the USA****

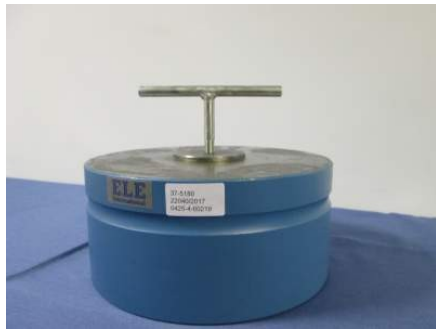

EN 12390-3/4 Distance Piece - 100 mm Depth

Code: [37-5180](#)

Product Group: [Distance Pieces](#)

Standards

BS 1881-115, EN 12390-3

Further Information

****Not available for sale in the USA****



100kN Flexural (Beams) Frame. Supplied Without Specimen Bearers and Fitting Kit.

Code: [37-6130](#)

Product Group: [Flexural Testing for Beams, Flexural Frame Attachments](#)

- Open sided for ease of specimen loading
- Meets EN 12390-5, 1521, 13161, 772-6 and ASTM C78 for standard section beams
- Optional ball seating assembly

This rigidly constructed, open sided frame is suitable for testing 100 mm and 150 mm square-section beams. The frame supports a hydraulic ram and upper sub-platen assembly incorporating a spherical seating. The upper and lower sub-platens will accept various specimen loading bearers, which are supplied separately.

Please note, a flexural fitting kit is required, see the accessories tab for options.

Standards

BS 1881-118, EN 12390-5

Accessories



100 kN Flexural Fitting Kit ADR Auto for 110 - 120 V AC, 60 Hz, 1 ph

Code: [37-6135/02](#)



100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 50 Hz, 1 ph

Code: [37-6135/01](#)



100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 60 Hz, 1 ph

Code: [37-6135/06](#)



100kN Flex Fitting Kit For Accu-Tek

Code: [1925PL0078](#)




100kN Flexural Fitting Kit (ADR) Used for Connecting Flexural Frames to ADR Compression Machines.

Code: [37-6138](#)



ASTM C78 Specimen Bearer Assembly Case-Hardened 38mm Dia X 160mm Length.

Code: [37-6132](#)



Ball Seating Assembly 150mm Dia Platens.

Code: [37-6133](#)



BS 1881 Specimen Bearer Assembly 38mm Dia X 160mm Length.

Code: [37-6131](#)



Standard Distance Piece - 100 mm Depth

Code: [37-5100](#)



Standard Distance Piece - 20 mm Depth

Code: [37-4980](#)



Standard Distance Piece - 50 mm Depth

Code: [37-5000](#)



Standard Distance Piece - 60 mm Depth

Code: [37-5020](#)



Standard Distance Piece - 80 mm Depth

Code: [37-5050](#)

Alternatives



Accu-Tek Touch 250 Automatic Compression Machine 110 V 60Hz

Code: [36-1690/02](#)



Accu-Tek Touch 250 Automatic Compression Machine 220-240 V 50Hz

Code: [36-1690/01](#)



Accu-Tek Touch 250 Automatic Compression Machine 220-240 V 60Hz

Code: [36-1690/06](#)




ADR Touch Manual Power Pack Including Fitting Kit 110V 60Hz 1Ph

Code: [36-6165/02](#)



ADR Touch Manual Power Pack Including Fitting Kit 220-240V 50/60Hz 1Ph

Code: [36-6165/01](#)

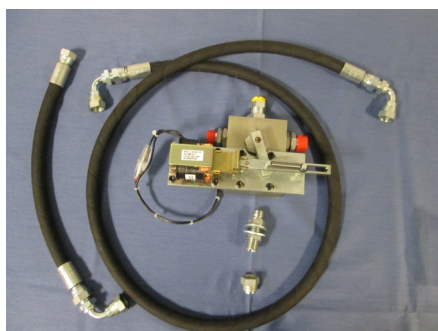

100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 50 Hz, 1 ph

Code: [37-6135/01](#)

Product Group: [Accessories to connect ELE compression machines to the flexural/transverse frames](#)

These flexural frames can be used with a wide range of ELE compression machines. Simply select one of two fitting kits designed to link the flexural frame to either the ADR-Auto range of compression machines.

Further Information

****Not available for sale in the USA****



BS 1881 Specimen Bearer Assembly 38mm Dia X 160mm Length.

Code: [37-6131](#)

Product Group: [Flexural Testing for Beams](#)

Comprising 2 self-aligning upper bearers, 1 self-aligning and 1 fixed lower bearer. Roller bearers are 38 mm diameter x 160 mm long. Suitable for 3- or 4-point flexural testing of beams.

Standards

BS 1881-118, EN 12390-5

Further Information

****Not available for sale in the USA****



Ball Seating Assembly 150mm Dia Platens.

Code: 37-6133

Product Group: [Flexural Testing for Beams, Flexural Frame Attachments](#)

Comprising a ball seating assembly with 150 mm diameter platen and a lower platen 150 mm diameter x 16 mm thick. Suitable for testing low-strength specimens.

Further Information

Specimen size (effective height)
Distance pieces required

40 mm
2 x 100 mm
1 x 80 mm

50 mm
2 x 100 mm
1 x 50 mm
1 x 20 mm

70.7 mm
2 x 100 mm
1 x 50 mm

100 mm
2 x 100 mm
1 x 20 mm



MultiPlex 50 Load Frame

Code: [25-3700/01](#)

Product Group: [Data Logging with the DSU](#), [CBR Load Frames](#), [Marshall Load Frames](#), [Triaxial Load Frames](#), [Data Logging with the DSU](#)

Compact bench mounting load frame designed for performing laboratory CBR, unconfined compression, Quick Undrained Triaxial and Marshall Stability Tests. Has a variable speed of 0.5 to 50.8mm per minute and features rapid approach of platen.

Standards

EN 12697-34, BS 598, BS 1377, BS 1924, ASTM D1883, EN 12697-23, EN 12697-24, EN 13286-47, AASHTO T193, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297, ASTM D6927

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (l x w x h)	550 x 400 x 1470 mm
Max vertical clearance	800 mm
Horizontal clearance	265 mm
Platen diameter	133 mm
Platen travel	100 mm
Platen speed range	0.5 to 50.8 mm/min
Rapid approach speed	40 mm/min
Weight kg	100, (shipping 113 kg)

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



50kN S-type Load Cell

Code: [27-1559](#)



Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

Code: [24-9188](#)



Cbr Penetration Piston (Adjustable).

Code: [24-9183](#)



CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1705](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: 78-0060



Clamped Boss Load Ring - 28.0 kN

Code: 78-0760



Clamped Boss Load Ring - 3.0 kN

Code: 78-0160



Clamped Boss Load Ring - 4.5 kN

Code: 78-0260



Penetration Dial Gauge BS

Code: 24-9186



Penetration Piston

Code: 24-9182



Penetration/Swell Dial Gauge ASTM.

Code: [24-9184](#)

Alternatives



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/06](#)



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/01](#)



Digital Tritest 50 Load Frame

Code: [25-3518/01](#)



DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

Code: [27-1300/01](#)

Product Group: [Data Logging with the DSU](#), [Electronic Instrumentation](#), [Electronic Instrumentation](#), [Data Logging with the DSU](#)

· Download the full brochure here
[[/Page/catalogue-download/NTRmZS9UaGUgTkVXIERTVSBVU0EucGRm](#)]

- 4 channel automatic control and data-logging unit
- Automatic, dual-frame control
- Performs CBR, Marshall, Unconfined Compression, Direct and Residual Shear, One-Dimensional Consolidation and Unconsolidated Undrained tests
- LAN connection - software can be running anywhere on your server
- Never lose data from power fails - 2 gigabytes of non-volatile memory
- Extended warranty

The Data System Unit (DSU) is a versatile instrument designed to accommodate the general logging requirements of geotechnical and materials testing engineers. Its intelligent interface allows the user to work with a range of different sensors.

Further Information

The DSU has two distinct modes of operation. The first is referred to as DS mode (DataSystem) for operation with ELE International's established DS7 geotechnical testing software.

DS MODE

- Up to four one dimensional consolidation tests
- Up to two CBR tests
- One direct/residual shear test
- One triaxial quick un-drained test

DU MODE

- Up to two Marshall tests
- Up to two CBR tests
- Up to two Unconfined compression tests
- Automatic frame control

OVERVIEW


- Touch Screen data entry for standalone operation, Marshall/CBR/Quick un-drained

- Automatic single and dual frame control (with multiplex 50 frame)
- Log memory of 2 gigabytes
- Non-volatile memory
- Ethernet TCPIP link and serial comms support
- Market leading signal stability
- Certificate and manual calibration features

Become a member of the ELE International web site, add this new product to a wishlist to receive a quote! Click here [Login]

This product is now available in the USA and Canada!

Accessories



Cable, Safety/ID

Code: [27-1300/11](#)



Dual Frame Comms Cable

Code: [27-1300/10](#)



PC Cable

Code: [27-1300/12](#)

Alternatives



DSU Electronic Readout and Control System 110 V AC 60 Hz

Code: [27-1300/02](#)



Marshall Test 50

Code: [45-6810/01](#)



Marshall Test 50

Code: [45-6810/06](#)



S-Type Load Cell 5 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

Code: [27-1551](#)

Product Group: [Load Measurement, Load Measurement](#)

- Repeatability better than $\pm 0.02\%$ of rated output
- Non-Linearity better than $\pm 0.03\%$ of rated output
- Supplied complete with 5-pin DIN type connector for connection to GDU

Ideally suited for a wide range of applications, ELE S-type load cells provide high accuracy and minimum deformation. Various models are available, with the necessary adaptors, for use with ELE Triaxial Load Frames, Multiplex 50/Marshall Test 50/CBR Test 50 and Direct Shear machine.

Accessories



50kN S-type Load Cell

Code: [27-1559](#)



S-Type Load Cell 10 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

Code: [27-1553](#)



S-Type Load Cell 25 kN.for Triaxial Tests. 27-1293 required separately.

Code: [27-1555](#)



S-Type Load Cell 5 kN.for Use with Direct/ Residual Shear Machine. Fitted with 5 Pin Din Plug.

Code: [27-1561](#)

Alternatives



50kN S-type Load Cell

Code: [27-1559](#)



S-Type Load Cell 10 kN.for Triaxial Tests. Fitted with 5 Pin Din Plug.

Code: [27-1553](#)



S-Type Load Cell 25 kN.for Triaxial Tests. 27-1293 required separately.

Code: [27-1555](#)



S-Type Load Cell 5 kN.for Use with Direct/ Residual Shear Machine. Fitted with 5 Pin Din Plug.

Code: [27-1561](#)



Flexural Jig Assembly

Code: [39-6160](#)

Product Group: [Cement Testing Accessories](#)

Does come as standard with 39-6160/01 and 39-6160/06.

The Flexural Jig Assembly is designed for the Flexural Testing of 40 x 40 x 160 mm mortar prisms when fitted into ELE range of compression machines. The frame is supplied with a special ball seating assembly that is attached to the upper roller bearers.

Fitted with one upper and two lower roller bearers.