



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

# Contents

[www.ele.com](http://www.ele.com)  
+44 (0) 01525 249 200



This wishlist was generated on 20/08/2018, and contains the following Products:

---

[27-1121/02](#)


**Unconfined Compression Test Digital Readout Set, English 110 vAC**

---

[80-0200/01](#)

**ELE Sieve Shaker**

---

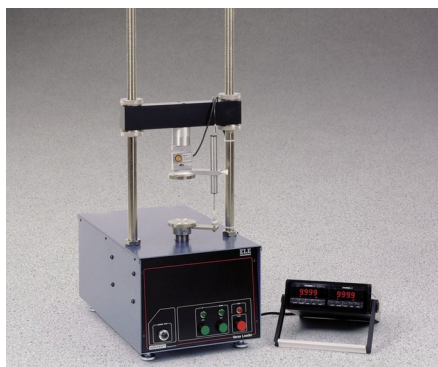

## Unconfined Compression Test Digital Readout Set, English 110 vAC

Code: [27-1121/02](#)

Product Group: [Versa-Loader](#)

Includes: 2-channel digital readout, 500 lb. capacity S-type load cell, axial strain transducer with 2" range, platens and mounting hardware.

## Standards

ASTM D2166, AASHTO T208

## Further Information

110vAC, 50/60 Hz, 1Ø.

## Accessories



## Unconfined Compression Test Accessory Set, English

Code: [25-3997](#)



## Unconfined Compression Test Accessory Set, Metric

Code: [25-3998](#)

## Alternatives



## Unconfined Compression Test Accessory Set, English

Code: [25-3997](#)

---



## Unconfined Compression Test Accessory Set, Metric

Code: [25-3998](#)



## ELE Sieve Shaker

Code: [80-0200/01](#)

Product Group: [ELE Sieve Shaker](#)

The ELE sieve shaker is powered by an electromagnetic drive that has no rotating parts to wear making it maintenance free and extremely quiet in operation.

The unit features a triple Vertical-Lateral-Rotary vibrating action that moves the sample over the sieve producing faster more efficient sieving, while the rapid vertical movements also help keep the apertures from blinding.

The shaker is ideal for laboratory or on site use. It is robust, compact and sufficiently lightweight to be portable. The separate digital microprocessor controlled console unit incorporates a keypad for setting the sieving program and is isolated from any effects of vibration from the shaker.

As standard the shaker includes, timer 0-999 minutes, adjustable vibration intensity and adjustable intermittent or continuous operation.

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

The unit accepts up to ten 200 mm or 8 inch, full height, diameter sieves and lid and receiver, or up to six 300 mm or 12 inch diameter sieves and lid and receiver. Complete as specified. Dimensions (l x w x h) 380 x 440 x 1085 mm. For 220 - 240 V AC, 50 Hz 1ph.