



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 12/09/2018, and contains the following Products:

24-9090/01

Automatic Soil Compactor BS 220-240V 50Hz 1Ph.

24-9000

BS Standard Compaction Mould 1000Cm Capacity.

24-9002

Standard Compaction Rammer 2.5kg BS1377

24-9150/01

Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

25-3518/01

Digital Tritest 50 Load Frame

24-9184

Penetration/Swell Dial Gauge ASTM.

24-9186

Penetration Dial Gauge BS

23-7150

Soil Colour Chart Set

23-6191/01

Bench-Mounting Mixer 5 Litre Capacity Complete with Bowl Beater and Whisk. 220-240V 50Hz 1Ph.

23-7502

Speedy Moisture Tester D2 Small 0-20% Moisture Range. Supplied Less Calcium Carbide

78-1225/01

100 Litre Drying Oven

25-0402

Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

25-0506

Cutting Ring 75mm Cell.

25-0440

Dial Gauge 10mm Travel X 0.002mm Divisions.

35-2505

Crack Detection Microscope Magnification X 40 Measuring Range of 4mm In 0.02mm Divisions

35-4043

Gwt Permeability Kit 0-6 bar range Supplied In a carrying case.

36-5125/01

ADR Touch Control PRO 2000 Auto Compression Machine

35-2846

200mm "Demec" Mechanical Strain Gauge

36-3090/01

ADR Touch 2000 Semi-Automatic Compression Machine with Digital Readout.

46-6100/01

Asphalt Binder Analyser 220-240V 50/60 Hz

23-4200

Proctor/Core Cutter Extruder Frame and Hydraulic Jack. Extrudes 100mm/4 Inch Diameter Specimens

45-6310

Compaction Mould

45-6410

Compaction Pedestal BS 598

45-6460

Compaction Hammer

45-6810/01

Marshall Test 50

45-6850

Breaking Head (Marshall)

45-6890

Flow Meter ASTM

78-0860

50kN Clamped Boss Load Ring

82-5247

Portable Thermometer 100 ml



Automatic Soil Compactor BS 220-240V 50Hz 1Ph.

Code: [24-9090/01](#)

Product Group: [Automatic Compactors](#)

Preset blow pattern ensures an even compaction, includes solid state controls for reliability and maintenance. An automatic digital counter resets to zero on the completion of a test. An selectable rammer with a drop height of 300-450mm, a selectable rammer weight of 2.5 or 4-5kg. A preset number of blows per layer can be set by thumb wheel control. A compaction rate of approximately 26 blows per minute. Accepts BS Standard Compaction and CBR moulds; also meets the requirements of BS1377. Voltage 220-240V 50hz 1ph.

Standards

BS 1377, EN 13286-2, EN 13286-47

Specification

Dimensions (l x w x h)	1650 x 410 x 700 mm
Rammer BS/EN	Circular faced, 50 mm dia, selectable to 2.5 kg or 4.5 kg weight.
Rammer ASTM	Circular faced, 2 in (50.8 mm) dia, selectable to 5.5 lb (2.5 kg) or 10 lb (4.5 kg) weight.
Drop BS/EN	Adjustable to 300 mm or 450 mm
Drop ASTM	Adjustable to 12 in (305 mm) or 18 in (457 mm)
Weight kg	150

Accessories



BS Cbr Mould Body.

Code: [24-9198](#)




BS Extension Collar

Code: [24-9200](#)



BS Solid Base or Top Plate

Code: [24-9204](#)



BS Standard Compaction Mould 1000Cm Capacity.


Code: [24-9000](#)

Alternatives



Automatic Soil Compactor BS 220-240V 60Hz 1Ph.

Code: [24-9090/06](#)

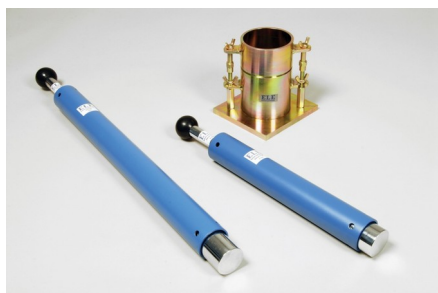

BS Standard Compaction Mould 1000Cm Capacity.

Code: [24-9000](#)

Product Group: [BS/EN compaction test 2.5kg](#),
[Accessories for BS compaction and CBR](#)


Plated steel standard compaction mould to BS 1377, comprising of a collar mould body and base plate with quick release wing nuts for easy dismantling.

Standards

BS 1377-4, BS 1924-2

Specification

Mould volume	1 litre
Dimensions	105 mm dia x 115.4 mm high
Construction	All steel, threaded studs with wing nuts, plated.
Weight	5.5 kg

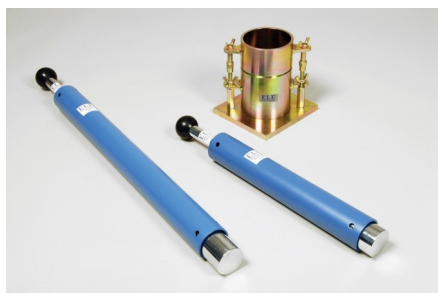

Standard Compaction Rammer 2.5kg BS1377

Code: [24-9002](#)

Product Group: [BS/EN compaction test 2.5kg](#)

50mm diameter with 300mm drop, manufactured from corrosion protected steel.


Standards

BS 1377-4, BS 1924-2

Specification

Rammer	50 mm dia, 2.5 kg
Drop	300 mm
Guide Sleeve	Machined steel tubing with air pressure release holes
Finish	Corrosion resistant
Weight kg	4.2

Alternatives



BS Compaction Rammer 4.5Kg Wt.

Code: [24-9004](#)



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/01](#)

Product Group: [CBR Load Frames](#)

- Single speed machine (BS/EN and ASTM)
- Rapid platen adjustment
- Complete with stabilising bar
- Compact, bench-mounting design
- Options for mechanical or electronic measurement

Designed for performing laboratory CBR tests to BS 1377, EN13286-47 and ASTM D1883, this bench mounting machine comprises a twin column frame incorporating a motorised drive system. Rapid adjustment of the platen is provided, which enables daylight to be taken up quickly and also close control of application of a seating load.

Standards

BS 1377, BS 1924, EN 13286-47, ASTM D1883, AASHTO T193

Specification

Dimensions (l x w x h)	550 x 400 x 1220 mm
Max vertical clearance	800 mm
Horizontal clearance	255 mm
Platen diameter	133 mm
Platen travel	105 mm
Weight kg	80

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



50kN S-type Load Cell

Code: [27-1559](#)



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)



BS Cbr Mould Body.

Code: [24-9198](#)



BS Extension Collar

Code: [24-9200](#)



BS Solid Base or Top Plate

Code: [24-9204](#)



Cbr Penetration Piston (Adjustable).

Code: [24-9183](#)



CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1705](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Penetration Dial Gauge BS

Code: [24-9186](#)



Penetration Piston

Code: [24-9182](#)



Penetration/Swell Dial Gauge ASTM.

Code: [24-9184](#)

Alternatives



CBR-Test 50 Machine 50 kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/02](#)



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/06](#)



Cbr-Test 50 Machine 50kN Capacity BS and ASTM Supplied with Stabilising Bar.

Code: [24-9150/01](#)



MultiPlex 50 Load Frame

Code: [25-3700/01](#)



Digital Tritest 50 Load Frame

Code: [25-3518/01](#)

Product Group: [Digital Tritest 50 Load Frame](#), [CBR Load Frames](#), [Triaxial Load Frames](#)

- Microprocessor control
- Large on-board LED screen display
- Direct entry via a touch sensitive keyboard
- Rapid approach and return to datum of platen
- Fully variable speed, 0.00001 to 9.99999 mm/min
- Samples up to 100 mm diameter

This 50 kN capacity machine, designed primarily for triaxial testing of soil specimens up to 100 mm diameter x 200 mm long, comprises a rigid twin column construction with an integral fully variable microprocessor controlled drive unit and LCD display with a touch sensitive keyboard. The machine is normally bench mounted for ease of installation and operation.

The use of a microprocessor controlled drive system and keyboard entry provides the Digital Tritest 50 with a wide variety of features which include pause and speed reset during test, RS 232C, operator programming of speed and control functions, self test diagnostics and many other features.

A robustly constructed steel case houses the motor drive system with careful attention being given to the prevention of ingress of water or grit. All operating controls are mounted on the front panel of the machine, which is angled and recessed to prevent physical and environmental damage.

Standards

BS 1377-7, BS 1377-8, BS 1924-2, ASTM D1883, ASTM D2166, ASTM D2850, ASTM D4767, ASTM D7181, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180, AASHTO T193, AASHTO T208, AASHTO T296, AASHTO T297

Further Information

Complete with RS 232C interface.

Specification

Capacity	50kN (11,200 lbf).
Speed Range	English mode: 0.000001 to 0.399999 in/min. Metric mode: 0.00001 to 9.99999 mm/min.
Rapid Approach Speed	1.0 in/min. (25 mm/min.).

Product Sheet

www.ele.com
+44 (0) 01525 249 200



Platen Travel	100mm (3.9"); limit switch protection.
Platen Diameter	133 mm (5.2")
Vertical Clearance	910 mm, (36 .8") maximum; 305mm, (12") minimum.
Horizontal Clearance	364mm, (15 .3").
Serial Interface	RS232C; programmable baud rate and protocol.
Overall Dimensions	500 x 500 x 1,470 mm, (19.7" w. x 19.7" d. x 57.8" h).
Weight	Net 100kg (220 lbs); Shpg. 136kg (300 lbs).

Accessories



50kN Clamped Boss Load Ring

Code: [78-0860](#)



Adaptor kit, to perform CBR on the Tritest 50 load frame

Code: [25-3518/10](#)



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)

Alternatives



MultiPlex 50 Load Frame

Code: [25-3700/01](#)



Versa-Loader

Code: [25-3525/02](#)



Penetration/Swell Dial Gauge ASTM.

Code: 24-9184

Product Group: Expansion (swell) Test Equipment,
In-situ CBR, Conversion of In-situ to Laboratory CBR,
Penetration Measurement

1 in travel x 0.0005 in divisions. Complete with rack
extensions and chisel edge anvil.

Standards

BS 1377, BS 1924



Penetration Dial Gauge BS

Code: [24-9186](#)

Product Group: [In-situ CBR](#), [Conversion of In-situ to Laboratory CBR](#), [Penetration Measurement](#)

Complete with rack extensions and chisel edge anvil. 25 mm travel x 0.01 mm divisions.

Standards

BS 1377, BS 1924



Soil Colour Chart Set

Code: **23-7150**

Product Group: **Soil Colour Charts, Soil Color Charts**

The Munsell Soil Colour Charts is an affordable way to evaluate the type of soil that is present within a given area. The book is set up to allow users to make soil Colour evaluations in the field quickly and easily. The soil classification system that has been developed around the Munsell Colour system is an established and accepted process to assign a soil type. This classification system has been used in the United States for more than 55 years to aid in the management and stewardship of natural resources. Through the use of the Munsell Soil Colour Charts, practitioners from a wide range of professions can share reliable and consistent information about the Colour of soils at a particular site with colleagues anywhere around the world. The Munsell Soil Colour Charts are used by a variety of industries and professions such as universities and high schools, forestry, forensics, environmental and soil science, building and contracting, landscaping, real estate, health departments, geology and archaeology.

Further Information

The following pages are included in the Munsell Soil Color Charts:

- Munsell 10R Soil Chart
- Munsell 10YR Soil Chart
- Munsell 2.5Y Soil Chart
- Munsell 2.5YR Soil Chart
- Munsell 5Y Soil Chart
- Munsell 5YR Soil Chart
- Munsell 7.5YR Soil
- 10Y - 5GY Colours - Olive greens Soil Chart
- Gley 1 & 2 (2 - Separate Charts) Soil Charts
- Munsell 5R Individual Soil Chart
- Munsell 7.5R Individual Soil Chart
- "New" White Page, 7.5R, 10YR, & 2.5Y

Specification

Munsell Book of Soil Colour Charts

Durable binder contains 440 Munsell Colour Standards

- Featuring ISCC-NBS Colour names
- Munsell alpha-numeric notation

Colour produced on water resistant substrate

Features Munsell notations for each color providing:

- Value (degree of lightness)
- Hue (Colour)
- Chroma (degree of saturation)


Used with medium, fine-grained, and coarse-grained rocks

Pages are cleanable and can be exposed to standard environmental conditions in the field

Dimensions

- Binder Size 150 mm x 196 mm x 25 mm
- Page Size 111 mm x 184 mm
- Weight 0.9 kg

Alternatives



Sand Grading Chart

Code: [23-7130](#)



Bench-Mounting Mixer 5 Litre Capacity Complete with Bowl Beater and Whisk. 220-240V 50Hz 1Ph.

Code: [23-6191/01](#)

Product Group: [Sample Mixers](#), [Mixing](#), [Sample Mixers](#)

The mixer has two electrically switched mixing speeds which obviates the need to switch off during speed selection. The mixing head comprises a beater which contra-rotates about a central shaft using planetary gearing. A lever-acting lifting device facilitates the insertion and removal of the bowl. This mixer is suitable for the mixing of soil samples, mortar, bituminous mixtures and associated materials where comparatively small samples are being prepared. Supplied with stainless steel bowl, beater and whisk.

Standards

BS 598-107, BS 1377-1, BS 1924-1, EN 12697-35

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions	545 x 380 x 550 mm
Beater Speeds (rpm) low, intermediate, high	136, 281, 580
Central shaft speeds (rpm) low, high	60, 124, 255
Rated power	500 W
Weight	20.2 kg

Accessories



Isomantle Electric Heater

Code: [45-5580/01](#)

Spares/Consumables



Stainless Steel Bowl 4.73 Litres.

Code: [23-6191/10](#)



Speedy Moisture Tester D2 Small 0-20% Moisture Range. Supplied Less Calcium Carbide

Code: [23-7502](#)

Product Group: [Rapid method by Speedy Moisture Tester](#), [Rapid method by Speedy Moisture Tester](#)

Uses a technique based on the fact that water will react with calcium carbide to form a gas and that the quantity of gas formed is directly proportional to the water present. The gas pressure is indicated on a built-in pressure gauge. The pressure gauge calibrated in percentage of moisture. Has a moisture range of 0-20% with gauge divisions every 0.2%. Holds a sample size of 6 g. Includes an electronic balance of 200 g capacity x 0.1 g readability and is supplied in plastic carrying case.

Standards

ASTM D4944, AASHTO T217

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Model	D2 Small
Moisture Range	0 to 20%
Gauge divisions	0.20%
Sample weight g	6
Weight complete kg	5.5

Accessories



Calcium Carbide Powder 500G.

Code: [23-7700](#)



Reagent for Speedy Moisture Testers. Pack of 12 Cans 500 G Each. (Calcium Carbide)

Code: [23-7702](#)



Speedy Calibration Unit Self Contained Unit.

Code: [23-7600](#)

Alternatives



Speedy Moisture Tester D2 Large 0-20% Moisture Range. Supplied Less Calcium Carbide

Code: [23-7452](#)



Speedy Moisture Tester G2 Large 0-50% Moisture Range. Supplied Less Calcium Carbide

Code: [23-7462](#)



100 Litre Drying Oven

Code: [78-1225/01](#)

Product Group: [Oven Drying Method](#), [Oven Drying Method](#), [Oven Drying Method](#)

Standards

BS 2648, BS 598, BS 1377, BS 1924

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Alternatives



150 Litre Drying Oven

Code: [78-1235/01](#)



225 Litre Drying Oven

Code: [78-1250/01](#)



50 Litre Drying Oven

Code: [78-1215/01](#)



Drying Oven 425 Litre Capacity

Code: [78-0135/01](#)



Consolidation Frame One Dimensional Consolidation Incremental Loading Device.

Code: 25-0402

Product Group: Consolidation Apparatus, Table Top Consolidation Apparatus

- High capacity - 8800 kPa on 50 mm diameter specimens using 11:1 beam ratio
- Triple beam ratio, 9:1, 10:1, 11:1
- Compact unit ensures maximum space saving

The ELE Oedometer is rigidly constructed to ensure minimum frame distortion. The frame is designed to load the specimen through a yoke assembly and one of three alternative beam ratios. The beam is fitted with a counterbalance weight and beam support jack. The cell platform will accept the complete range of ELE consolidation cells and is fitted with a central spigot to ensure accurate centring of the cell under the loading yoke. Dimensions without hanger 711 x 203 x 508 mm (l x w x h). Weight 24 kg.

Standards

ASTM D2435, ASTM D4546, AASHTO T216, ASTM D3877, BS 1377-5

Further Information

Supplied without dial gauge and weights.

Specification

Load Capacity	48 tons/sq. ft. (5,14 8 kPa) on 2.5" (63 mm) diam. samples.
Loading Beam	Cast aluminum; counterbalanced; 9:1,10:1 and 11 :1 ratios.
Frame	Cast aluminum; integral beam support jack; plated steel and platform.
Dimensions	203 x 711 x 508 mm, (8" w. x 28" d. x 20" h) . excluding weight hanger.
Weight	24 KG

Accessories



16 Ton Weight Set

Code: [25-0544](#)



2.416" Fixed Ring Consolidometer

Code: [25-0480](#)



2.5" Floating Ring Consolidometer

Code: [25-0530](#)



Consolidation Cell Complete 2.5 Inch Diameter Sample. Inc. Porous Discs and Cutting Ring.

Code: [25-0479](#)



Consolidation Cell Complete 50mm Diameter Sample.

Code: [25-0455](#)



Consolidation Cell/ Oedometer Complete 75mm Diameter Sample

Code: [25-0503](#)



Floor Mounting Stand.

Code: [25-0429](#)



Mechanical Dial Indicator - 0.4" Range

Code: [88-4070](#)



Mechanical Dial Indicator - 1.0" Range Counter Clockwise Movement

Code: [88-4120](#)



Mechanical Dial Indicator - 10 mm Range

Code: [88-4080](#)



Mechanical Dial Indicator - 25 mm Range Counter Clockwise Movement

Code: [88-4130](#)



Set of Weights 100Kg Total Weight.

Code: [25-0408](#)



Weight Set A

Code: [25-0535](#)



Weight Set B

Code: [25-0537](#)


Spares/Consumables



Electronic Digital Indicator, 0.600"/15 mm range

Code: [88-4210](#)

Alternatives



Pneumatic Consolidation Apparatus

Code: [25-0560](#)



Cutting Ring 75mm Cell.

Code: [25-0506](#)

Product Group: [BS EN consolidation cells and accessories](#), [Fixed Ring Consolidation](#)

Standards

BS 1377-5

Accessories



Consolidation Cell/ Oedometer Complete 75mm Diameter Sample

Code: [25-0503](#)



Dial Gauge 10mm Travel X 0.002mm Divisions.

Code: [25-0440](#)

Product Group: [Measurement of Horizontal and Vertical Movement](#), [Vertical settlement measurement](#), [Direct/Residual Shear Apparatus](#)

Spares/Consumables



Electronic Digital Indicator, 0.600"/15 mm range

Code: [88-4210](#)



Vertical Dial Indicator, English

Code: [25-0445](#)



Crack Detection Microscope Magnification X 40 Measuring Range of 4mm In 0.02mm Divisions

Code: [35-2505](#)

Product Group: [Crack Detection](#), [Crack Detection Microscope](#)

Specifically designed for measuring crack width in concrete, this high definition microscope operates via an adjustable light source provided by high power batteries.

Supplied in a pocket sized carrying case.

Specification

Magnification	X 35 .
Measuring Range	4 mm.
Divisions	0.02 mm.
Dimensions	1.5" x 3.5" x 6" (40 x 90 x 150 mm) in case.
Weight	Net 19.4 oz. (550 g).

Alternatives



Calibrated Crack Monitor

Code: [35-2510](#)



Gwt Permeability Kit 0-6 bar range Supplied In a carrying case.

Code: [35-4043](#)

Product Group: [Permeability of Concrete](#)

The Water Permeability Test Kit is a portable unit capable of measuring in-situ permeability. It has a dual measuring range of 0 - 1.5 bar or 0 - 6 bar. Consisting of a sealed water reservoir and all necessary attachments, the unit is supplied complete in a carrying case. Dimensions 460 x 310 x 100 mm (l x w x h).

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



ADR Touch Control PRO 2000 Auto Compression Machine

Code: 36-5125/01

Product Group: General Purpose Compression Machines

The ADR Touch Control PRO is supplied complete with safety gates ready for testing 300 x 150 mm diameter cylinders. When used for cube testing distance pieces of the appropriate size must be ordered separately.

Further Information

****Not available for sale in the USA****

The ADR Touch Control PRO will deliver all the features and quality of the established ADR-Auto range, with its 20 year history, but with a new sleek design and additional capabilities. The console assembly consists of an ADR Touch Control PRO and power base which can be used with all existing concrete and cement frames

USER INTERFACE

The new ADR Touch Control PRO has an improved user interface providing a high quality platform for testing that will enhance the performance of our compression machines. It now has a larger 7-inch colour touch screen with a higher definition display, allowing easier observation of test progress. A favourites option is also available, allowing users to save the most common set-ups for immediate access, without the need for navigating through selection menus.

USER FLEXIBILITY

The ADR Touch Control PRO has a unique flexible head with rotation capabilities of 75-degrees and a 45-degree tilt, improving usability and comfort for individual users. It is available with four languages English, Spanish, Portuguese and French, making it even more user-friendly and accessible to a wider audience. The new LAN connectivity feature lets the operator use the PC based APP (ELE Logger) to download test results away from the test area. User flexibility has also increased with the new ADR Touch Control PRO as it can now be operated remotely, so tests can be initiated away from the test area. Many issues can be resolved quickly by our service team through the new remote diagnostics feature and updating to the latest version of software has never been easier.

COMPATIBILITY

The all new dual sensor capabilities allow users to test both concrete and cement samples on one frame. The ADR Touch Control PRO is compatible with all existing compression frames and upgrade kits are also available. The upgrade kits can be used to convert existing ADR-Auto consoles to the new Automatic Digital Control Readout.

TESTING TIMES

The new generation ADR Compression Machines have an increased control over the pace rate, which allows users to run the pace rate higher than average, but still within standard. This produces an average time saving of 10% for a typical 150mm cube sample.

ELECTRICAL

Reduced component count and no wire design results in increased reliability and serviceability. New low voltage interlocks and e-stop has increased safety. The ADR Touch Control Pro has the latest Arm Core Processor technology which has improved the processing power and speed.

Specification

Capacity	2000 kN
Cubes (Concrete)	Up to 200 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	n/a
TFV and ACV	Yes
Voltage Supply	220-240 V 50 Hz 1 Ph
Frame Type	Welded
Max vert. Clearance	375 mm
Max hor. Clearance	355 mm
Platen Sizes	Lower , Upper 222 mm
Overall Dimensions	450 x 780 x 1225 mm

Accessories



100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 50 Hz, 1 ph

Code: [37-6135/01](#)



100 kN Flexural Fitting Kit ADR Auto for 220 - 240 V AC, 60 Hz, 1 ph

Code: [37-6135/06](#)



2000 kN Load Calibration Device complete with Handheld Readout Unit & Calibration Certificate ISO376

Code: [37-8315](#)



Flexible Hose

Code: [5038B0027](#)



Impact Printer Rs232 Serial Connection. Supplied Complete with 1 Paper Roll.

Code: [37-4859/01](#)



Standard Distance Piece - 100 mm Depth

Code: [37-5100](#)



Standard Distance Piece - 20 mm Depth

Code: [37-4980](#)



Standard Distance Piece - 50 mm Depth

Code: [37-5000](#)



Standard Distance Piece - 60 mm Depth

Code: [37-5020](#)



Standard Distance Piece - 80 mm Depth

Code: [37-5050](#)

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output

Code: [6014A0062](#)

Alternatives




ADR Touch Control PRO 2000 Auto Compression Machine

Code: [36-5125/06](#)



ADR Touch Control PRO 2000 Auto Compression Machine

Code: [36-5125/02](#)

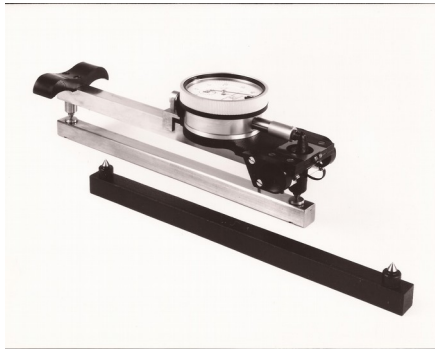

200mm "Demec" Mechanical Strain Gauge

Code: [35-2846](#)

Product Group: [Strain Gauge](#)

This gauge is ideal for monitoring cracks and strains in a number of structure types.

Standards

BS 1881-206



ADR Touch 2000 Semi-Automatic Compression Machine with Digital Readout.

Code: 36-3090/01

Product Group: General Purpose Compression Machines

- 2000 kN/450 000 lbf capacity
- Tests 150 and 100 mm concrete cubes or cylinders up to 320 x 160 mm diameter
- Incorporates an ADR touch digital readout with rugged electrically driven hydraulic power pack with manual pace control as standard.
- High stability welded construction steel frame.
- Fitted with front and rear gates for operator protection.
- Maximum vertical clearance between upper & lower platen 340mm and horizontal distance is 325 mm
- Supplied with 222 mm dia removable lower platen marked for centering of cube and cylinder specimens.

Incorporating the ADR Touch digital readout, the machines are designed to test cubes and cylinders in accordance with most International Standards. Supplied fitted for cylinder testing with safety gates. When used for cube testing appropriate distance pieces according to the size of specimen to be tested are required and must be ordered separately.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

The Standard range of compression machines has been designed to meet the need for a simple, economic and reliable means of testing concrete.

Whilst delivering all the features and reputation of the established ADR Series with its extensive design history, the new and improved user interface provides a high quality platform for testing that enhances the performance of ELE's compression machines.

New, sophisticated electronics further the benefits of simplified operation, whilst delivering the highest levels of accuracy in testing concrete and cement/mortar samples, satisfying the needs of Quality Control Managers, Lab Managers and Technicians.

ACCURACY & SAVINGS

The new ADR Touch Series, with 145mm (5.7") high resolution QVGA touch screen interface and intuitive menu-driven operation, reduces the time taken to set up the machine and perform tests, reducing the time to train staff by up to 25%.

- Up to 6 sample types can be set as favorites, enabling one-touch set up for repeat testing.
- Full, QWERTY touch pad for input of test data.

Most testing errors produce lower strength results. Noncompliant loading rates can generate errors in measured strength. The user interface includes real-time display of load vs. time, further ensuring accurate and consistent test results and providing "goodness of test" data to improve traceability in your QC operations.

TRACEABILITY & DATA QUALITY

The ADR range now provides improved data quality and traceability in due diligence cases - it is now possible to demonstrate traceability all the way from the machine/user to the accreditation body, increasing your reputation and peace of mind - all test results now come complete with the machine serial number attached.

- Enhanced USB data communications between PC and machine - eliminating the need for download software.
- Two gigabytes of storage memory.
- Full customization of sample sizes - stress calculations are automatically recalculated.


USER SAFETY

With full safety gates as standard, total systems diagnostics, ram run-out switches and overload warnings ensure the safety of your employees and the reliability of your machine.

Specification

Testing Standards	BS EN ISO 7500-1, ASTM E4
Capacity	2000 kN
Cubes (Concrete)	Up to 150 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	n/a
Flexural Testing	Via Flexural Frame
TFV and ACV	Yes
Voltage Supply	220-240V 50/60 Hz 1Ph.
Frame Type	Welded
Max vert. Clearance	340 mm
Max hor. Clearance	325 mm
Platen Sizes	Lower, Upper 222 mm
Max Ram Travel	50 mm

Accessories



100kN Flexural Fitting Kit (ADR) Used for Connecting Flexural Frames to ADR Compression Machines.

Code: [37-6138](#)



2000 kN Load Calibration Device complete with Handheld Readout Unit & Calibration Certificate ISO376

Code: [37-8315](#)



ADR Touch Head for Compression Machines

Code: [37-5951/09](#)



Flexible Hose

Code: [5038B0027](#)



Impact Printer Rs232 Serial Connection. Supplied Complete with 1 Paper Roll.

Code: [37-4859/01](#)



Standard Distance Piece - 100 mm Depth

Code: [37-5100](#)



Standard Distance Piece - 20 mm Depth

Code: [37-4980](#)



Standard Distance Piece - 50 mm Depth

Code: [37-5000](#)



Standard Distance Piece - 60 mm Depth

Code: [37-5020](#)



Standard Distance Piece - 80 mm Depth

Code: [37-5050](#)

Spares/Consumables



Pressure transducer, 0-700bar, 0.05 to 10v DC Output


Code: [6014A0062](#)

Alternatives



ADR Touch 1500 Compression Machine with Digital Readout.

Code: [36-0720/01](#)

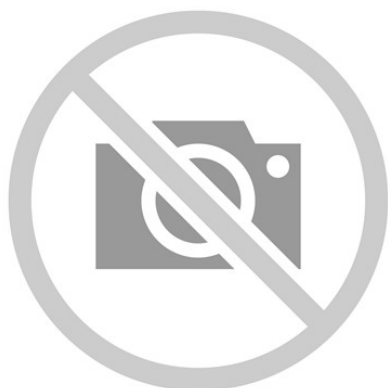

Asphalt Binder Analyser 220-240V 50/60 Hz

Code: 46-6100/01

Product Group: Ignition Method

Designed to measure the asphalt binder content of hot mix asphalt (HMA) using loss on ignition, in accordance with AASHTO T 308-10, ASTM D6307-10 and BSEN 12697-39:2012.

Further Information

The integral microprocessor controlled weighing and calculation system is configurable to allow variations to the standard test method. Test result reports are available in both printed and software format. The high temperature afterburner minimises the production of noxious waste fumes. Supplied complete with 2 sets of sample baskets.

Features:

- Designed to measure asphalt binder content by loss on ignition
- Avoids health, environmental and waste management issues
- Avoids the expense associated with older solvent extraction methods
- Reduced emissions due to high temperature afterburner
- Controlled via a multi-lingual touchscreen interface
- English, Spanish, French, Chinese, Italian and Russian language display
- Other languages are available to order
- Automatic calculation of final sample weight and binder % result
- Adjustable aggregate correction factor
- Average test times from 20 mins for 6 mm aggregates, to 45 mins for 40 mm aggregates
- Permanent (dot-matrix) printed reports
- USB data output compatible with most spread sheets
- Easy naming, storage and recall of recipes that can be transferred between units
- Simplified menu structure with secure 'Supervisor' and 'Operator' settings
- Metal waste gas extraction pipe
- Factory fitted thermocouple access port, if temperature calibration is to be carried out
- Precise weight measurements, displayed to 0.1g resolution
- Capacity for large sample sizes for more accurate results (max. sample is 4.5kg)

Specification

Max Temp (°C)	750
Dimensions: Internal (HxWxD)	220 x 450 x 350 mm
Dimensions: External (HxWxD)	980 x 600 x 775 mm
Type	Bench-top
Thermocouple type	K
Max power (W)	8000



Proctor/Core Cutter Extruder Frame and Hydraulic Jack. Extrudes 100mm/4 Inch Diameter Specimens

Code: 23-4200

Product Group: Soil Extruders, Accessories for manual and automatic compaction

Adaptor plates will be supplied; extrudes samples from BS Compaction Mould, Proctor Mould 100 mm, Core Cutter and Marshall Mould. Maximum extrusion force 20kn.

Standards

BS 1377-1

Further Information

NOT AVAILABLE FOR SALE IN THE USA

Accessories

Steel Block

Code: 45-6463



Alternatives




38mm Hand Operated Hydraulic Sample Extruder with Trimming Knife 38mm Split Former & Cutting Tool.

Code: 23-4090



Cbr/Core Cutter Extruder Frame and Hydraulic Jack Extrudes 150mm/6 Inch Diameter Specimens.

Code: 23-4250



Marshall Test 50

Code: 45-6810/01



Marshall Test 50

Code: 45-6810/06



Compaction Mould

Code: 45-6310
Product Group: Accessories for manual and automatic compaction, Asphalt Compaction Mould
Comprising of mould body, baseplate and combined filling/extraction collar.

Standards

EN 12697-30, ASTM D6926, AASHTO T245

Specification

Construction	Machined seamless steel forming mold; base and collar.
Finish	Plated for rust resistance.
Dimensions	4" (101.6 mm) i.d. x 3" (76.2 mm) internal h. with base.
Weight	Net 6 lbs. (2.7 kg).



Compaction Pedestal BS 598

Code: [45-6410](#)

Product Group: [Manual Compaction](#)

Comprising a 300 mm sq x 25 mm thick steel plate complete with 4 tie rods and securing nuts. A mould clamp and hammer guide are fitted to the plate. The unit is supplied complete with a laminated hardwood block.

Standards

EN 12697-30

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Compaction Hammer

Code: [45-6460](#)

Product Group: [Manual Compaction, Stability](#)
[Compaction Hammer](#)


Satisfies BS 598. The hammer has a 4535 g sliding weight with a free fall of 457 mm.

Standards

EN 12697-30, ASTM D6926, AASHTO T245

Specification

Tamping Face	3-7/8" (98 mm) diam.
Hammer	10 lb. (4.54 kg).
Drop	18" (457 mm).
Construction	Machined steel; cast aluminum handle.
Weight	Net 16 lbs. (7.2 kg).

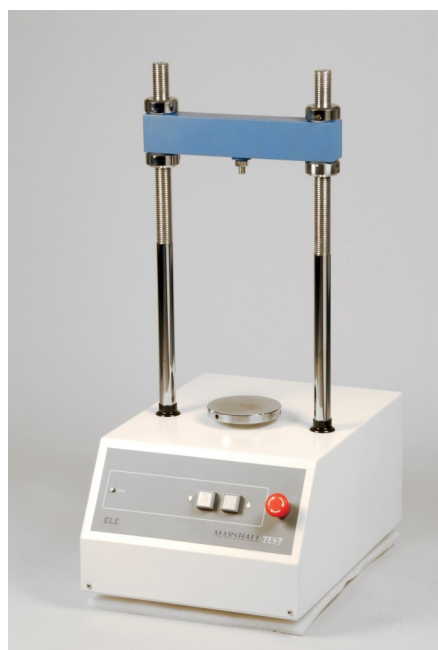

Marshall Test 50

Code: [45-6810/01](#)

Product Group: [Marshall Load Frames](#)

- Geared screwjack and motor drive
- Precise speed
- Internal limit switch for both directions of travel
- Easy to use controls

This bench-mounting mechanical load frame is ruggedly constructed to encompass the strain and loads involved with the test. The unit is compact in size and can be quickly installed on a bench top, requiring only a power point. It has been designed for simple operation, is easy to clean and requires minimum maintenance.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Load frame, 50 kN capacity. Supplied without Breaking Head. For 220 - 240 V AC, 50 Hz, 1 ph.

Accessories



250 Asphalt Probe

Code: [47-0202/10](#)



30 L Heating Bath with Led Display Cover

Code: [45-6550/01](#)



50kN Clamped Boss Load Ring

Code: 78-0860



50kN S-type Load Cell

Code: 27-1559



Breaking Head (Marshall)

Code: 45-6850



Flow Meter BS/EN

Code: 45-6880

Alternatives



Digital Asphalt Thermometer

Code: 47-0202



DSU Electronic Readout and Control System 110 V AC 60 Hz

Code: 27-1300/02



DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

Code: [27-1300/01](#)



Proctor/Core Cutter Extruder Frame and Hydraulic Jack. Extrudes 100mm/4 Inch Diameter Specimens

Code: [23-4200](#)



Breaking Head (Marshall)

Code: [45-6850](#)

Product Group: [Accessories for the Marshall test](#)

Complete with gauge disc. Supplied without flow meter.

Standards

EN 12697-34

Accessories



250 Asphalt Probe

Code: [47-0202/10](#)



30 L Heating Bath with Led Display Cover

Code: [45-6550/01](#)



50kN S-type Load Cell

Code: [27-1559](#)

Alternatives



250 Asphalt Probe

Code: [47-0202/10](#)



30 L Heating Bath with Led Display Cover

Code: [45-6550/01](#)



50kN S-type Load Cell

Code: [27-1559](#)



Flow Meter ASTM

Code: [45-6890](#)

Product Group: [Accessories for the Marshall test](#)

Dial gauge graduated 0.001 inches with 1 inch travel.
Supplied with stem brake unit and flow meter pedestal.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



50kN Clamped Boss Load Ring

Code: 78-0860

Product Group: Clamped Boss Load Rings, Digital Tritest 50 Load Frame, Load Measurement, Proving Rings, Accessories for the Marshall test, Accessories for the Marshall Test, CBR-Test 50 Machine, Load Measurement, CBR Loading Press, Hand-Operated, Force measurement

Calibrated in compression.

Standards

EN 12697-34

Specification

Capacity - kN	50
Capacity - kgf	5000
Capacity - lbf	11,200
Typical Design Sensitivity - kN/div	45.5
Typical Design Sensitivity - Kgf/div	4.54
Typical Design Sensitivity - lbf/div	10.18
Overall Height	9.76" (248 mm)
Approx Weight	6.35 kg

Accessories



Clamped Boss Load Ring - 10.0 kN

Code: 78-0460



Clamped Boss Load Ring - 2.0 kN

Code: 78-0060



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)



Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 11,200 lbs (50.0 kN)

Code: [78-0864](#)

Spares/Consumables



Spare Dial Indicator for Load Rings

Code: [78-5461](#)

Alternatives



Clamped Boss Load Ring - 10.0 kN

Code: [78-0460](#)



Clamped Boss Load Ring - 2.0 kN

Code: [78-0060](#)



Clamped Boss Load Ring - 28.0 kN

Code: [78-0760](#)



Clamped Boss Load Ring - 3.0 kN

Code: [78-0160](#)




Clamped Boss Load Ring - 4.5 kN

Code: [78-0260](#)



Digital Proving Ring, 11,200 lbs (50.0 kN)

Code: [78-0864](#)

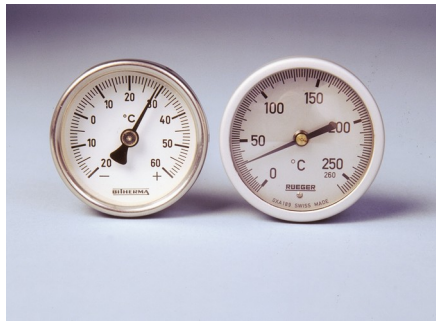

Portable Thermometer 100 ml

Code: [82-5247](#)

Product Group: [Portable Dial-type Thermometers](#)

50 mm diameter dial with a 180 mm long stem.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****