



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 23/04/2019, and contains the following Products:

24-9182

Penetration Piston

24-9198

BS Cbr Mould Body.

24-9200

BS Extension Collar

24-9202

BS Perforated Base Plate.

24-9206

Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

24-9208

C-Spanner for BS Cbr Mould. Two Required.

24-9210

Base Plate Tool for BS Mould

24-9212

Static Compaction Plug.

24-9214

2Kg Annular Surcharge Weight

24-9216

2Kg Split Surcharge Weight.

24-9237

Spacer Disc 5-7/8" Diameter

25-3700/01

MultiPlex 50 Load Frame

25-5500

Two-Way Split Former 50mm Diameter.

25-5530

Two Part Split Mould 50mm

27-1300/01

DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

27-1559

50kN S-type Load Cell

27-1705

CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

27-1798

DS7.2 California Bearing Ratio (CBR) Penetration Program for Windows 7, 32/64 bit

34-0130

Tamping Rod 16mm Dia X 600mm long hemispherical at both ends.

34-3265

Air Entrainment Meter B Type Complete with Carrying Case. Supplied with Aluminium Tamping Bar.

34-3265/10

Pump Assembly

34-3265/12

Gauge Kit

35-1500

Advanced SilverSchmidt Concrete Test Hammer (ST Version)

35-1530

Testing Anvil

35-2505

Crack Detection Microscope Magnification X 40 Measuring Range of 4mm In 0.02mm Divisions

35-2505/10

Lens End Bulb Pack of 3

82-7720/01

Vacuum Pump

82-7720/10

Vacuum Oil



Penetration Piston

Code: [24-9182](#)

Product Group: [Penetration Measurement](#)

1.935 mm² (3 in²) area foot of case hardened steel.
Designed to fit all ELE load rings.



BS Cbr Mould Body.

Code: [24-9198](#)

Product Group: [BS EN CBR mould, Accessories for BS compaction and CBR](#)

Standards

ASTM D1883, AASHTO T193

Specification

Mould	152 x 127 mm (inside diameter x height)
Collar	51 mm height, fits both ends of mould
Base plate	Solid, fits both ends of mould
Construction	All steel, plated
Weight kg	7.3



BS Extension Collar

Code: [24-9200](#)

Product Group: [BS EN CBR mould accessories](#),
[Accessories for BS compaction and CBR](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



BS Perforated Base Plate.


Code: [24-9202](#)

Product Group: [BS EN CBR mould accessories](#)

To fit mould body

Standards

EN 13286-4, BS 1377-4, BS 1924-2

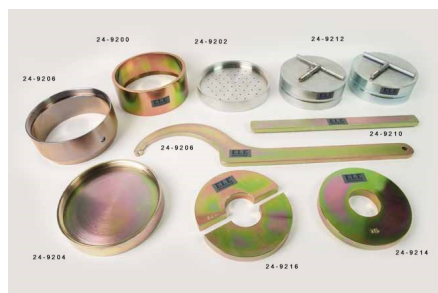

Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

Code: [24-9206](#)

Product Group: [BS EN CBR mould accessories](#)

To fit BS/EN mould body.

Standards

EN 13286-4, BS 1377-4, BS 1924-2



C-Spanner for BS Cbr Mould. Two Required.


Code: [24-9208](#)

Product Group: [BS EN CBR mould accessories](#)

To fit BS/EN CBR moulds and collars. Two required.

Standards

BS 1377-4, BS 1924-2, EN 13286-4

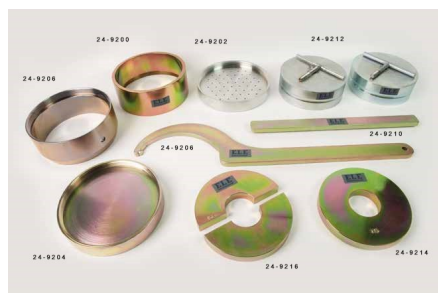

Base Plate Tool for BS Mould

Code: [24-9210](#)

Product Group: [BS EN CBR mould accessories](#)

To fit into base plate to assist removal from mould body.

Standards

EN 13286-4, BS 1377-4, BS 1924-2



Static Compaction Plug.

Code: [24-9212](#)

Product Group: [BS EN CBR mould accessories](#)

Steel, 150 mm dia x 51 mm thick. Complete with removable handle.

Standards

EN 13286-4, BS 1377-4, BS 1924-2



2Kg Annular Surcharge Weight

Code: [24-9214](#)

Product Group: [BS EN CBR mould accessories](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



2Kg Split Surcharge Weight.

Code: [24-9216](#)

Product Group: [BS EN CBR mould accessories](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



Spacer Disc 5-7/8" Diameter

Code: [24-9237](#)

Product Group: [Spacer Discs](#)

5-7/8" diam. x 2" h. (147.6 x 50.8 mm).

Specification

Construction

Steel; machined on all sides.

Finish

Plated.

Weights

Net 15.4 lbs. (7 kg).



MultiPlex 50 Load Frame

Code: 25-3700/01

Product Group: [Data Logging with the DSU](#), [CBR Load Frames](#), [Marshall Load Frames](#), [Triaxial Load Frames](#), [Data Logging with the DSU](#)

Compact bench mounting load frame designed for performing laboratory CBR, unconfined compression, Quick Undrained Triaxial and Marshall Stability Tests. Has a variable speed of 0.5 to 50.8mm per minute and features rapid approach of platen.

Standards

EN 12697-34, BS 598, BS 1377, BS 1924, ASTM D1883, EN 12697-23, EN 12697-24, EN 13286-47, AASHTO T193, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297, ASTM D6927

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (l x w x h)	550 x 400 x 1470 mm
Max vertical clearance	800 mm
Horizontal clearance	265 mm
Platen diameter	133 mm
Platen travel	100 mm
Platen speed range	0.5 to 50.8 mm/min
Rapid approach speed	40 mm/min
Weight kg	100, (shipping 113 kg)



Two-Way Split Former 50mm Diameter.

Code: [25-5500](#)

Product Group: [Two-way Split Formers](#), [Two-Way Split Formers](#)

50 mm Diameter Two-Way Split Former.



Two Part Split Mould 50mm

Code: [25-5530](#)

Product Group: [Two-way Split Moulds](#), [Two-Part Split Mould](#)



DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

Code: [27-1300/01](#)

Product Group: [Data Logging with the DSU](#), [Electronic Instrumentation](#), [Electronic Instrumentation](#), [Automatic Data Acquisition - CBR](#), [Data Logging with the DSU](#)

· Download the full brochure here
[[/Page/catalogue-download/NTRmZS9UaGUgTkVXIERTVSBVU0EucGRm](#)]

- 4 channel automatic control and data-logging unit
- Automatic, dual-frame control
- Performs CBR, Marshall, Unconfined Compression, Direct and Residual Shear, One-Dimensional Consolidation and Unconsolidated Undrained tests
- LAN connection - software can be running anywhere on your server
- Never lose data from power fails - 2 gigabytes of non-volatile memory
- Extended warranty

The Data System Unit (DSU) is a versatile instrument designed to accommodate the general logging requirements of geotechnical and materials testing engineers. Its intelligent interface allows the user to work with a range of different sensors.

Further Information

The DSU has two distinct modes of operation. The first is referred to as DS mode (DataSystem) for operation with ELE International's established DS7 geotechnical testing software.

DS MODE

- Up to four one dimensional consolidation tests
- Up to two CBR tests
- One direct/residual shear test
- One triaxial quick un-drained test

DU MODE

- Up to two Marshall tests
- Up to two CBR tests
- Up to two Unconfined compression tests
- Automatic frame control

OVERVIEW

- Touch Screen data entry for standalone operation, Marshall/CBR/Quick un-drained
- Automatic single and dual frame control (with multiplex 50 frame)
- Log memory of 2 gigabytes
- Non-volatile memory
- Ethernet TCP/IP link and serial comms support
- Market leading signal stability
- Certificate and manual calibration features

Become a member of the ELE International web site, add this new product to a wishlist to receive a quote! Click here [\[Login\]](#)

This product is now available in the USA and Canada!



50kN S-type Load Cell

Code: [27-1559](#)

Product Group: [Load Measurement](#), [Electronic Instrumentation](#), [Force measurement](#), [Electronic Instrumentation](#)

Maximum working capacity of 50 kN and excitation 10 V ac/dc with an output of 2.7 mV/V nominal.


Aluminium alloy and stainless steel construction with IP65 environmental protection.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

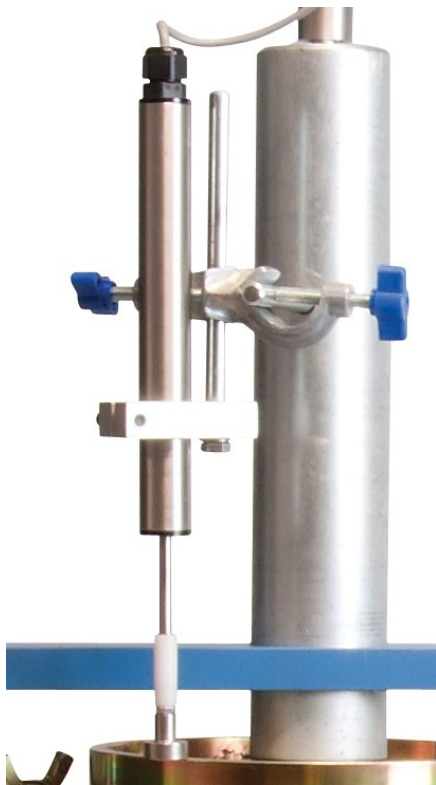

CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1705](#)

Product Group: [Penetration Measurement](#),
[Penetration Measurement](#)

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	14 V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45




DS7.2 California Bearing Ratio (CBR) Penetration Program for Windows 7, 32/64 bit

Code: [27-1798](#)

Product Group: [DS7.2 CBR Penetration Software](#),
[DS7.2 for Windows 7, Automatic Data Acquisition -](#)
[CBR, DS7.2](#)

This program provides the classical data for the CBR test. Load and penetration are monitored simultaneously. The program tabulates the results and provides a graphical presentation report.

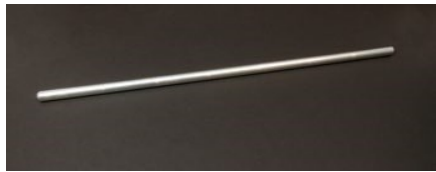

Tamping Rod 16mm Dia X 600mm long hemispherical at both ends.

Code: [34-0130](#)

Product Group: [Precision Air Entrainment Meter, Slump Test, Accessories for Concrete Moulds](#)

Steel, 600 mm long x 16 mm dia, hemispherical at both ends.

Please note this item is not graduated.

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Air Entrainment Meter B Type Complete with Carrying Case. Supplied with Aluminium Tamping Bar.

Code: **34-3265**

Product Group: **Precision Air Entrainment Meter, Precision Air Entrainment Meter**

- 7 litre capacity
- Shock-proof pressure gauge mounting
- Lightweight aluminum construction
- Heavy-duty plastic carrying case for easy transport to site

The proper control of entrained air in concrete is recognized as one of the most important functions in modern concrete manufacture. For the concrete engineer, the ELE Precision Air Entrainment Meter offers an instrument for the testing and designing of concrete mixes.

The instrument is designed so that the operating parts form an integral unit. The container is rigid, thus providing an accurate device for the performance of unit weight testing. For convenience, the tare weight in grams is stamped on the bottom. When used with the nomograph supplied within the operating instructions, the air meter provides quick and easy particle density and percent of free moisture in aggregate determinations.

Complies with BS 1881-106 EN 12350-7 ASTM C231

Standards

ASTM C231, AASHTO T152

Specification

Capacity	7 Litres
Readings	Up to 22% entrained air
Accuracy	1/4% full scale
Aggregate Size	2" (50.8 mm) maximum
Container	With tare weight stamped on bottom; 2-piece clamping device for positive seal.
Water	4 oz required
Initial Pressure	Approx. 10 strokes needed
Pressure Gauge	In shock-proof mounting
Tamping Rod	Aluminium; 24" (610 mm) long
Dimensions	9-3/4" diam. X 13-1/4" h. (248 x 337 mm)
Weight	Net 15 lbs (8 kg)



Pump Assembly

Code: [34-3265/10](#)

Product Group: [Precision Air Entrainment Meter](#)

Standards

ASTM C231, AASHTO T152



Gauge Kit

Code: [34-3265/12](#)

Product Group: [Precision Air Entrainment Meter](#)

Standards

ASTM C231, AASHTO T152



Advanced SilverSchmidt Concrete Test Hammer (ST Version)

Code: 35-1500

Product Group: Surface Hardness, Surface Hardness

The SilverSchmidt ST is the first integrated concrete test hammer featuring true rebound value and unmatched repeatability.

Two factors contribute to the improved performance of this concrete test hammer over its predecessors:

- Velocity based detection of the rebound quotient
- The lightweight hybrid design of the impact plunger is made from aerospace alloy, matched to the elastic properties of the concrete and equipped with a hardness steel cap

Independent validation testing by BAM (Federal Institute for Materials Research and Testing, Germany) has shown the SilverSchmidt ST to have less dispersion than the classical concrete test hammer over the entire range.

The unique design and high quality construction of the concrete test hammer SilverSchmidt ST makes rebound hammer testing quicker and more accurate than ever before.

Standards

EN 12504-2, EN 13791, ASTM C805

Further Information

- The SilverSchmidt ST concrete test hammer combines a high measurement accuracy with an unmatched repeatability.
- The rebound value requires no angular correction
- The concrete test hammer offers customer conversion curves for a wide range of compressive concrete strengths, including low f_c (<10 N/mm², 1'450 psi) and high strength concrete (up to 100 N/mm², 14'500 psi)

- A large number of measurement points can be easily collected by the concrete test hammer and automatically evaluated according to statistical data

- The concrete test hammer offers automatic conversion to the required measurement unit (MPa, N/mm², kg/cm², psi)

PLEASE NOTE THIS MODEL IS SUPPLIED WITH SOFTWARE ONLY FOR PERFORMING FIRMWARE UPGRADES AND SELECTING STATISTICS PRESETS.

Specification

Technical Data	Silver Schmidt
Impact Energy	2.207 Nm
Hammer Mass	135 g
Spring Constant	0.79 N/mm
Spring Extension	75 mm (2.95")
Dimensions	55 x 55 x 255 mm (2.16" x 2.16" x 9.84")
Concrete Compressive Strengths	10-100 N/mm ² (1450-14500 psi)
Weight	570 g (1.4 lb)



Testing Anvil

Code: [35-1530](#)

Product Group: [Concrete Test Hammer](#), [Surface Hardness](#), [Testing Anvil](#)

Standards

ASTM C805



Crack Detection Microscope Magnification X 40 Measuring Range of 4mm In 0.02mm Divisions

Code: 35-2505

Product Group: Crack Detection, Crack Detection
Microscope

Specifically designed for measuring crack width in concrete, this high definition microscope operates via an adjustable light source provided by high power batteries.

Supplied in a pocket sized carrying case.

Specification

Magnification	X 35 .
Measuring Range	4 mm.
Divisions	0.02 mm.
Dimensions	1.5" x 3.5" x 6" (40 x 90 x 150 mm) in case.
Weight	Net 19.4 oz. (550 g).



Lens End Bulb Pack of 3

Code: [35-2505/10](#)

Product Group: [Crack Detection](#)



Vacuum Pump

Code: [82-7720/01](#)

Product Group: [Vacuum Pumps](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Type	Single stage
Pump	Oil filled rotary
Ultimate vacuum	Better than 0.1 mbar
Displacement	42 litres per minute (2.4 m ³ /hour)
Electrical supply	220 – 240 V AC, 50 - 60 Hz, 1 ph
Weight	12.7 kg



Vacuum Oil

Code: [82-7720/10](#)

Product Group: [Vacuum Pumps](#)

4 litres

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****