



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

Contents

www.ele.com
+44 (0) 01525 249 200



This wishlist was generated on 11/09/2019, and contains the following Products:

26-2270

Laboratory Vane Apparatus with 4 Springs and 12.7mm Vane; Hand Operated.

26-3335

H60 Field Inspection Vane Tester 0-200Kpa In Carrying Case. includes calibration and certificates.



Laboratory Vane Apparatus with 4 Springs and 12.7mm Vane; Hand Operated.

Code: [26-2270](#)

Product Group: [Laboratory Vane Apparatus](#),
[Laboratory Vane Apparatus](#)

The equipment is based on a design by the Transport Research Laboratory, England, and is available in hand or motorised versions. Stress is applied through the 12.7 x 12.7 mm vane by means of any one of four calibrated springs.

Standards

BS 1377

Further Information

Hand-operated, complete with 4 calibrated springs and a 12.7 mm diameter x 12.7 mm long vane.

Accessories



Attachment Clamp for 38 mm and 100 mm Sample Tubes

Code: [26-2289](#)



Vane 12.7mm Diameter X 12.7mm Long.

Code: [26-2279](#)



Vane 12.7mm Diameter X 19mm Long

Code: [26-2281](#)



Vane 12.7mm Diameter X 25.4mm Long.

Code: [26-2283](#)

Spares/Consumables



Set of 4 Calibrated Springs for Laboratory Vane Apparatus.

Code: [26-2275/10](#)

Alternatives




Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 110-120V 50/60Hz 1Ph.

Code: [26-2114/02](#)



Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

Code: [26-2114/01](#)

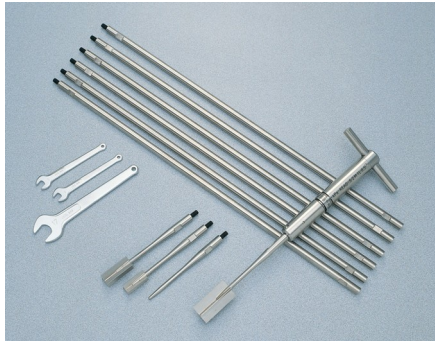

H60 Field Inspection Vane Tester 0-200Kpa In Carrying Case. includes calibration and certificates.

Code: [26-3335](#)


Product Group: [Inspection Vane](#)

This instrument is an essential tool for civil engineers involved in site investigation work. The unit is supplied in kit form with a carrying case incorporating the measuring head, extension rods, vanes, etc. The measuring head comprises a T-handle that is spring-loaded against the extension rod adaptor. Weight 5.5 kg.

Further Information

Range 0 to 260 kPa, in carrying case with 6 x 0.5 metre extension rods, 3 vanes, dummy vane and tools. Supplied complete with Calibration Certificate.

Spares/Consumables



H605 Extension Rod 0.5M and connection piece

Code: [26-3335/11](#)

Alternatives



Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 110-120V 50/60Hz 1Ph.

Code: [26-2114/02](#)



Digital Direct/Residual Shear Apparatus Complete with Lever Loading Assembly. 220-240V 50/60Hz 1Ph.

Code: [26-2114/01](#)