



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

Contents

www.ele.com
+44 (0) 01525 249 200



This wishlist was generated on 13/01/2020, and contains the following Products:

34-0110

Slump Cone

34-0132

Graduated Tamping Rod

34-3265

Air Entrainment Meter B Type Complete with Carrying Case. Supplied with Aluminium Tamping Bar.

81-0220

Aluminium Scoop Large



Slump Cone

Code: [34-0110](#)

Product Group: [Slump Test, Slump Cones](#)


Complies with EN 12350-2 (BS 1881-102), ASTM C143/C143M, AASHTO T119

Standards

ASTM C143/C143M, ASTM C192, AASHTO T119

Specification

Construction	Seamless, heavy-gauge spun steel; 0.45" (1.1 mm) min. Thickness.
Finish	Plated for rust and corrosion resistance.
Dimensions	100 mm top diam. X 200 mm bottom diam. (without foot pieces) x 300 mm h.
Weights	Net 5.5 lbs (2.5kg)

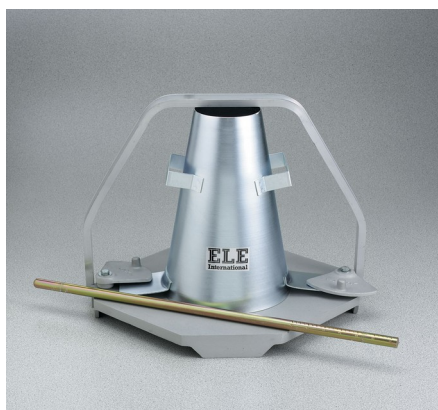

Graduated Tamping Rod

Code: 34-0132

Product Group: Precision Air Entrainment Meter,
Slump Cones, Tamping Rods

Standards

ASTM C31, ASTM C124, ASTM C138, ASTM C143/C143M, ASTM C157, ASTM C192, ASTM C232, ASTM C234, AASHTO T23, AASHTO T119, AASHTO T120, AASHTO T121, ASTM T126, AASHTO T158, AASHTO T159, AASHTO T160

Specification

Dimensions

5/8" (16 mm) diam. X 24" (610 mm) long; with one hemispherical end.

Weight

Net 2 lb (910 g)



Air Entrainment Meter B Type Complete with Carrying Case. Supplied with Aluminium Tamping Bar.

Code: **34-3265**

Product Group: **Precision Air Entrainment Meter, Precision Air Entrainment Meter**

- 7 litre capacity
- Shock-proof pressure gauge mounting
- Lightweight aluminum construction
- Heavy-duty plastic carrying case for easy transport to site

The proper control of entrained air in concrete is recognized as one of the most important functions in modern concrete manufacture. For the concrete engineer, the ELE Precision Air Entrainment Meter offers an instrument for the testing and designing of concrete mixes.

The instrument is designed so that the operating parts form an integral unit. The container is rigid, thus providing an accurate device for the performance of unit weight testing. For convenience, the tare weight in grams is stamped on the bottom. When used with the nomograph supplied within the operating instructions, the air meter provides quick and easy particle density and percent of free moisture in aggregate determinations.

Complies with EN 12350-7 (BS 1881-106), ASTM C231/C231M, AASHTO T152.

Standards

ASTM C231, AASHTO T152

Specification

Capacity	7 Litres
Readings	Up to 22% entrained air
Accuracy	0.25% full scale
Aggregate Size	2" (50.8 mm) maximum
Container	With tare weight stamped on bottom; 2-piece clamping device for positive seal.
Water	4 oz required
Initial Pressure	Approx. 10 strokes needed
Pressure Gauge	In shock-proof mounting
Tamping Rod	Aluminium; 24" (610 mm) long
Dimensions	9-3/4" diam. X 13-1/4" h. (248 x 337 mm)
Weight	Net 15 lbs (8 kg)



Aluminium Scoop Large

Code: [81-0220](#)

Product Group: [Slump Test, Scoops and Shovels](#)

Further Information

****Not available for sale in the USA****