



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

# Contents

[www.ele.com](http://www.ele.com)  
+44 (0) 01525 249 200



This wishlist was generated on 14/02/2020, and contains the following Products:

---

39-1100


**Three-gang Mould**

---

39-1300/01

**Humidity Cabinet 320 Litre Capacity Compliant to EN 196 and EN 459-2 with Digital Data Recorder**

---

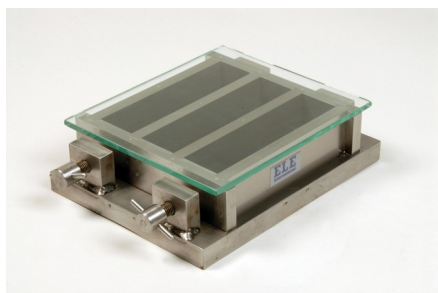

## Three-gang Mould

Code: [39-1100](#)

Product Group: [Moulding of Prisms](#)

For 40.1 x 40 x 160 mm mortar prisms. This mould is manufactured to a very high specification. Supplied with glass plate.

Complies to EN 196-1, ISO 679, EN 413-2, EN 459-2, EN 13454-2.

## Standards

EN 196-1, EN 413-2, EN 459-2, EN 1015-10, EN 13454-2, ISO 679, BS 3892-1, BS 4551-1

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***



## Humidity Cabinet 320 Litre Capacity Compliant to EN 196 and EN 459-2 with Digital Data Recorder

Code: [39-1300/01](#)

Product Group: [Humidity Cabinet BS EN, Prism  
Moulds and Inserts](#)

This cabinet has a stainless steel interior and it is fitted with adjustable shelves. It also has sealed chambers making it suitable for humidity's up to 98%. This can have an outer door heater to demist the inner toughened glass viewing door. Two 12 mm access ports are provided as standard.

Monitoring and control of both heating and cooling functions are performed with great accuracy, and achieves typical temperature stability of  $\pm 0.5^{\circ}\text{C}$ . The LED digital display allows the temperature performance to be easily verified. A digitally set over temperature safety cut-out is fitted to all models.

For 220 - 240 V AC, 50 Hz, 1 ph.

## Standards

EN 196-1, EN 459-2

## Further Information

**\*\*NOT AVAILABLE FOR SALE IN THE USA\*\***

10 Reinforced Shelves and Digital Data Recorder.

## Specification

Capacity	320 litres
Dimensions External, Internal	660 x 635 x 1745 mm, 490 x 510 x 1275 mm
Temperature Range	+5.0°C to +50°C
Fluctuation (better than)	$\pm 0.2^{\circ}\text{C}$
Variation (better than)	$\pm 0.5^{\circ}\text{C}$
Recorder:	7 day,
Electronic data logger,	0 – 50°C,
Temperature,	0 – 98% RH
Humidity	
Rated power	850 Watt
Number of shelves	10 fully adjustable in 20 mm

# Product Sheet

[www.ele.com](http://www.ele.com)  
+44 (0) 01525 249 200



Weight

increments  
200 kg