



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

This wishlist was generated on 02/04/2020, and contains the following Products:

24-8080/01

Automatic Soil Compactor BS CE Compliant

24-9010

Straight Edge 300mm.

24-9063

ASTM Compaction Rammer 2.5Kg.

24-9070

ASTM/Modified Proctor Compaction Rammer 4.5Kg.

24-9182

Penetration Piston

24-9184

Penetration/Swell Dial Gauge ASTM.

24-9188

Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

24-9198

BS Cbr Mould Body.

24-9200

BS Extension Collar

24-9202

BS Perforated Base Plate.

24-9204

BS Solid Base or Top Plate

24-9206

Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

24-9208

C-Spanner for BS Cbr Mould. Two Required.

24-9210

Base Plate Tool for BS Mould

24-9212

Static Compaction Plug.

24-9214

2Kg Annular Surcharge Weight

24-9216

2Kg Split Surcharge Weight.

24-9228

ASTM Cbr Mould Complete with Collar & Perforated Base

24-9238

ASTM Spacing Disc.

24-9243

4.5Kg Annular Surcharge Weight ASTM.

24-9244

5Lb (2.27Kg) Split Surcharge Weight.

24-9250

Filter Paper Equivalent to Whatman No 5 150mm Dia Box of 100.

24-9260

Swell Plate

24-9262

Swell Stand

25-3700/01

MultiPlex 50 Load Frame

27-1300/01

DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

27-1559

50kN S-type Load Cell

27-1705

CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

27-2798

DS7.3 CBR Penetration for Windows 10

36-5165/01

ADR Touch Control PRO 3000 Auto BS EN Compression Machine



Automatic Soil Compactor BS CE Compliant

Code: 24-8080/01

Product Group: BS CE Automatic Compactors, Automatic Soil Compactor

- With NEW CE Compliant guarding as an extra safety measure for users
- Complies to BS 1377-4, BS 1924-2, EN 13286-2, EN 13286-47 standards
- Automatic re-setting of counter after completion of blow pattern

The time and effort required to prepare specimens for compaction studies and other test methods can often be costly and time-consuming. The use of an automatic, mechanical compactor will show considerable cost benefits over hand compaction methods.

These machines automatically compact specimens eliminating the laborious hand compaction method. The height and weight of the rammer are adjustable to suit test requirements.

An automatic blow pattern ensures optimum compaction for each layer of soil in compliance with the standards. The rammer travels across the mould and the table rotates the mould in equal steps on a base that is extremely stable. The number of blows per layer can be set at the beginning of the test.

Preset blow pattern ensures an even compaction, includes solid state controls for reliability and maintenance. An automatic digital counter resets to zero on the completion of a test. The selectable rammer has a drop height of 300-450mm, a selectable rammer weight of 2.5 or 4.5kg. A preset number of blows per layer can be set by thumb wheel control. A compaction rate of approximately 26 blows per minute. Accepts BS Standard Compaction and CBR moulds; also meets the requirements of BS 1377-4, BS 1924-2, EN 13286-2, EN 13286-47.

Specification

Standards
Rammer BS/EN

BS 1377-4, BS 1924-2, EN 13286-2, EN 13286-47
Circular faced, 50 mm dia,
selectable to 2.5 kg or 4.5 kg
weight

Drop BS/EN
Weight (kg)

Adjustable to 300 mm or 450 mm
165



Straight Edge 300mm.

Code: [24-9010](#)

Product Group: [BS/EN compaction test 4.5kg, Proctor compaction, Straightedge](#)

300 mm

Standards

BS 1377-4, BS 1924-2, ASTM D698, ASTM D1557, AASHTO T99, EN 13286-2, EN 13286-4, ASTM D1883, AASHTO T193, ASTM D558, ASTM D559, ASTM D560, AASHTO T134, AASHTO T135, AASHTO T136, AASHTO T180

Specification

Construction	Flat ground tool steel; beveled edge.
Dimensions	L x W x T (300mm x 40mm x 6mm).
Weight	550g



ASTM Compaction Rammer 2.5Kg.

Code: [24-9063](#)

Product Group: [Proctor compaction](#), [Standard Compaction Hammer](#)

50.8mm diameter x 305mm deep.

Standards

ASTM D1557, AASHTO T180, ASTM D558, ASTM D559, ASTM D560, ASTM D698, AASHTO T99, AASHTO T134, AASHTO T135, AASHTO T136

Specification

Hammer	2" diam. (50.8 mm); 5-1/2 lbs. (2.49 kg).
Drop	12 " (305 mm).
Guide Sleeve	Machined steel tubing with air pressure release holes
Finish	Corrosion resistant
Weight	4.1 kg (9 lbs)



ASTM/Modified Proctor Compaction Rammer 4.5Kg.

Code: [24-9070](#)

Product Group: [ASTM/Modified Proctor compaction,](#)
[Modified Compaction Hammer](#)

50.8mm diameter x 457.2 mm drop.

Standards

ASTM D1557, AASHTO T180

Specification

Hammer	2" diam. (50.8 mm); 10 lbs. (4.5 kg).
Drop	18" (457.2 mm).
Guide Sleeve	Machined steel tubing with integrally spun end cap; air pressure release holes.
Finish	Corrosion resistant
Weight	Net 6.3 kg (14 lbs)



Penetration Piston

Code: [24-9182](#)

Product Group: [Penetration Measurement](#)

1.935 mm² (3 in²) area foot of case hardened steel.
Designed to fit all ELE load rings.



Penetration/Swell Dial Gauge ASTM.

Code: 24-9184

Product Group: Expansion (swell) Test Equipment,
In-situ CBR, Conversion of In-situ to Laboratory CBR,
Penetration Measurement

1 in travel x 0.0005 in divisions. Complete with rack
extensions and chisel edge anvil.

Standards

BS 1377, BS 1924



Bracket and Adaptor. Dual Purpose Mounting Bracket for CBR Penetration Gauges EL24-9184/EL24-9186

Code: [24-9188](#)

Product Group: [In-situ CBR](#), [Conversion of In-situ to Laboratory CBR](#), [Penetration Measurement](#)

Dual purpose mounting bracket for CBR penetration dial gauges. Allows gauge to be fixed to penetration piston or load ring.

Standards

BS 1377, BS 1924



BS Cbr Mould Body.

Code: [24-9198](#)


Product Group: [BS EN CBR mould, Accessories for BS compaction and CBR](#)

Standards

ASTM D1883, AASHTO T193

Specification

Mould	152 x 127 mm (inside diameter x height)
Collar	51 mm height, fits both ends of mould
Base plate	Solid, fits both ends of mould
Construction	All steel, plated
Weight kg	7.3

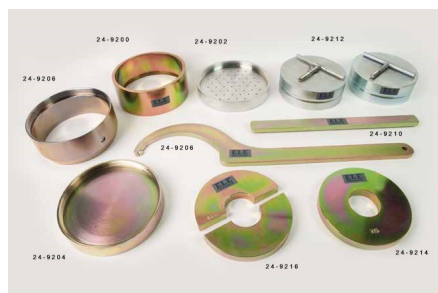

BS Extension Collar

Code: [24-9200](#)

Product Group: [BS EN CBR mould accessories](#),
[Accessories for BS compaction and CBR](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



BS Perforated Base Plate.

Code: [24-9202](#)

Product Group: [BS EN CBR mould accessories](#)

To fit mould body

Standards

EN 13286-4, BS 1377-4, BS 1924-2



BS Solid Base or Top Plate

Code: 24-9204

Product Group: BS EN CBR mould accessories,
Accessories for BS compaction and CBR

Standards

EN 13286-4, BS 1377-4, BS 1924-2



Cbr Cutting Collar with Area Ratio of 21.9% to Fit BS Moulds.

Code: [24-9206](#)

Product Group: [BS EN CBR mould accessories](#)

To fit BS/EN mould body.

Standards

EN 13286-4, BS 1377-4, BS 1924-2



C-Spanner for BS Cbr Mould. Two Required.


Code: [24-9208](#)

Product Group: [BS EN CBR mould accessories](#)

To fit BS/EN CBR moulds and collars. Two required.

Standards

BS 1377-4, BS 1924-2, EN 13286-4

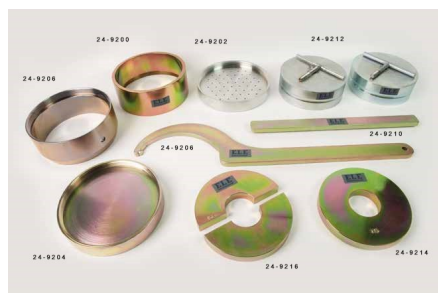

Base Plate Tool for BS Mould

Code: [24-9210](#)

Product Group: [BS EN CBR mould accessories](#)

To fit into base plate to assist removal from mould body.

Standards

EN 13286-4, BS 1377-4, BS 1924-2



Static Compaction Plug.

Code: [24-9212](#)

Product Group: [BS EN CBR mould accessories](#)

Steel, 150 mm dia x 51 mm thick. Complete with removable handle.

Standards

EN 13286-4, BS 1377-4, BS 1924-2



2Kg Annular Surcharge Weight

Code: [24-9214](#)

Product Group: [BS EN CBR mould accessories](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



2Kg Split Surcharge Weight.

Code: [24-9216](#)

Product Group: [BS EN CBR mould accessories](#)

Standards

EN 13286-4, BS 1377-4, BS 1924-2



ASTM Cbr Mould Complete with Collar & Perforated Base

Code: [24-9228](#)

Product Group: [ASTM/AASHTO CBR mould](#)

With collar and perforated baseplate.

Steel mould, corrosion resistant finish, supplied with collar and perforated base plate.

Designed to accept optional cutting collars and solid baseplates.

Standards

ASTM D1883, AASHTO T193

Specification

Mould	152.4 x 177.8 mm (inside diameter x height)
Collar	50.8 mm height, fits both ends of mould
Base plate	Perforated
Construction	All steel, plated
Weight kg	9



ASTM Spacing Disc.

Code: [24-9238](#)

Product Group: [ASTM/AASHTO CBR mould accessories](#), [Spacer Discs](#)

150.8 mm diameter x 61.4 mm deep.

Specification

Construction

Steel; machined on all sides.

Finish

Plated.

Weights

Net 18.9 lbs. (8.6 kg).



4.5Kg Annular Surcharge Weight ASTM.

Code: [24-9243](#)

Product Group: [ASTM/AASHTO CBR mould accessories](#)



5Lb (2.27Kg) Split Surcharge Weight.

Code: [24-9244](#)

Product Group: [ASTM/AASHTO CBR mould accessories](#), [Surcharge Weights](#)

Specification

Construction

Machined steel.

Finish

Plated.



Filter Paper Equivalent to Whatman No 5 150mm Dia Box of 100.

Code: [24-9250](#)

Product Group: [Filter Paper, ASTM/AASHTO CBR
mould accessories](#)

Box of 100.

Standards

ASTM D1883, AASHTO T193

Specification

Grade	Coarse.
Size	15 cm diam. (5.9â€³).
Weight	Net 8 oz. (227 g).



Swell Plate

Code: [24-9260](#)

Product Group: [Expansion \(swell\) Test Equipment](#),
[Swell Plate](#)

With adjustable stem.

Standards

ASTM D1883, AASHTO T193

Specification

Base Plate	5 15/16" diam. (150.8mm); perforated.
Contact Head	Adjustable; locks on stem with knurled nut.
Construction	Aluminium
Weight	Net 2-1/2 lbs. (1.1 kg).



Swell Stand

Code: [24-9262](#)

Product Group: [Expansion \(swell\) Test Equipment, Tripod Attachment](#)

For mounting Swell Dial Gauge in position on CBR mould collar.

Standards

ASTM D1883, AASHTO T193

Further Information

Requires dial indicator; not included, order separately

Specification

Construction	Machined, one-piece cast aluminum.
Contact Head	Integral part of ssembly; holds dial indicator.
Construction	2" I. (50.8 mm) included.
Weight	Net 1 lb. (0.4 kg).



MultiPlex 50 Load Frame

Code: [25-3700/01](#)

Product Group: [Data Logging with the DSU](#), [CBR Load Frames](#), [Marshall Load Frames](#), [Triaxial Load Frames](#), [Data Logging with the DSU](#)

Compact bench mounting load frame designed for performing laboratory CBR, unconfined compression, Quick Undrained Triaxial and Marshall Stability Tests. Has a variable speed of 0.5 to 50.8mm per minute and features rapid approach of platen.

220-240 V, 50/60 Hz

Standards

EN 12697-34, BS 598, BS 1377, BS 1924, ASTM D1883, EN 12697-23, EN 12697-24, EN 13286-47, AASHTO T193, ASTM D2850, ASTM D4767, AASHTO T296, AASHTO T297, ASTM D6927

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Specification

Dimensions (l x w x h)	550 x 400 x 1470 mm
Max vertical clearance	800 mm
Horizontal clearance	265 mm
Platen diameter	133 mm
Platen travel	100 mm
Platen speed range	0.5 to 50.8 mm/min
Rapid approach speed	40 mm/min
Weight kg	100, (shipping 113 kg)



DSU Electronic Readout and Control System 220 - 240 V AC 50/60 Hz

Code: 27-1300/01

Product Group: Data Logging with the DSU, Electronic Instrumentation, Automatic Data Acquisition - CBR, Electronic Instrumentation, Electronic Instrumentation, Data Logging with the DSU

· Download the full brochure here
[Page/catalogue-download/NTRmZS9UaGUgTkVXIERTVSBVU0EucGRm]

- 4 channel automatic control and data-logging unit
- Automatic, dual-frame control
- Performs CBR, Marshall, Unconfined Compression, Direct and Residual Shear, One-Dimensional Consolidation and Unconsolidated Undrained tests
- LAN connection - software can be running anywhere on your server
- Never lose data from power fails - 2 gigabytes of non-volatile memory
- Extended warranty

The Data System Unit (DSU) is a versatile instrument designed to accommodate the general logging requirements of geotechnical and materials testing engineers. Its intelligent interface allows the user to work with a range of different sensors.

Further Information

The DSU has two distinct modes of operation. The first is referred to as DS mode (DataSystem) for operation with ELE International's established DS7 geotechnical testing software.

DS MODE

- Up to four one dimensional consolidation tests
- Up to two CBR tests
- One direct/residual shear test
- One triaxial quick un-drained test

DU MODE

- Up to two Marshall tests
- Up to two CBR tests
- Up to two Unconfined compression tests
- Automatic frame control

OVERVIEW

- Touch Screen data entry for standalone operation, Marshall/CBR/Quick un-drained
- Automatic single and dual frame control (with multiplex 50 frame)
- Log memory of 2 gigabytes
- Non-volatile memory
- Ethernet TCP/IP link and serial comms support
- Market leading signal stability
- Certificate and manual calibration features

Become a member of the ELE International web site, add this new product to a wishlist to receive a quote! Click here [\[Login\]](#)

This product is now available in the USA and Canada!



50kN S-type Load Cell

Code: [27-1559](#)

Product Group: [Load Measurement](#), [Electronic Instrumentation](#), [Force measurement](#), [Electronic Instrumentation](#)


Maximum working capacity of 50 kN and excitation 10 V AC/DC with an output of 2.7 mV/V nominal. Aluminium alloy and Stainless Steel construction with IP65 environmental protection. Fitted with 5-pin DIN plug.

Standards

EN 12697-34

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

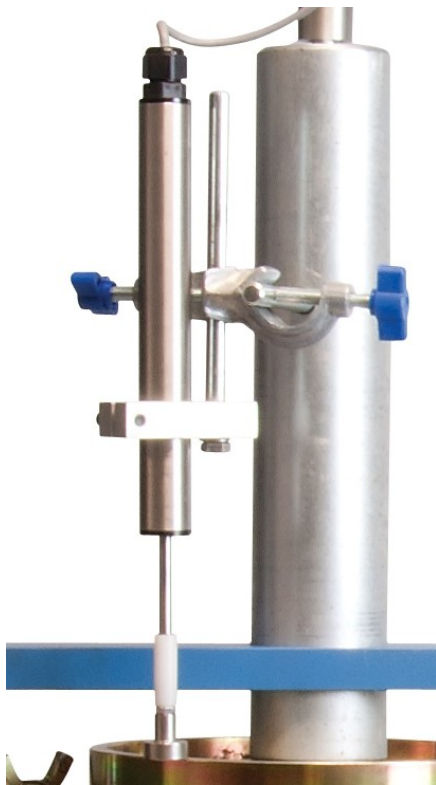

CBR Penetration Transducer 50mm Travel Fitted with 5 Pin Din Plug.

Code: [27-1705](#)

Product Group: [Penetration Measurement](#),
[Penetration Measurement](#)

- Ideally suited for use with GDU for accurate displacement measurements
- Models available for use in consolidation, shear, CBR and triaxial test applications
- Supplied complete with mounting hardware for specified products

Displacement Transducers are used in consolidation, shear, CBR and triaxial test applications for accurate displacement measurements. They are supplied complete with a 5-pin DIN type connector for direct connection to the GDU.

Specification

Construction	Fully encapsulated electronics, sealed in a stainless steel case
Excitation	14 V DC
Connector	5-pin DIN type
Mounting bracket	Included as standard
Weight kg	0.45



DS7.3 CBR Penetration for Windows 10

Code: [27-2798](#)

Product Group: [DS7.3 for Windows 10, Automatic Data Acquisition - CBR, DS7.3](#)

This program provides the classical data for the CBR test. Load and penetration are monitored simultaneously. The program tabulates the results and provides a graphical presentation report.



ADR Touch Control PRO 3000 Auto BS EN Compression Machine

Code: [36-5165/01](#)

Product Group: [BS EN Compression Machines](#)

The ADR Touch Control PRO 3000 Auto BS EN is supplied complete with self-centring lower platen and safety gates fitted with interlock switches ready for testing 300 x 150 mm diameter cylinders. When used for cube testing Distance pieces (EN) of the appropriate size must be ordered separately.

Standards

EN 12350-6, NF P18-411, EN 12390-4, EN 12390-3, EN 772-1, BS EN ISO 7500-1, ASTM E4

Further Information

****Not available for sale in the USA****

The ADR Touch Control PRO will deliver all the features and quality of the established ADR-Auto range, with its 20 year history, but with a new sleek design and additional capabilities. The console assembly consists of an ADR Touch Control PRO and power base which can be used with all existing concrete and cement frames

User interface

The new ADR Touch Control PRO has an improved user interface providing a high quality platform for testing that will enhance the performance of our compression machines. It now has a larger 7-inch colour touch screen with a higher definition display, allowing easier observation of test progress. A favourites option is also available, allowing users to save the most common set-ups for immediate access, without the need for navigating through selection menus.

USER FLEXIBILITY

The ADR Touch Control PRO has a unique flexible head with rotation capabilities of 75-degrees and a 45-degree tilt, improving usability and comfort for individual users. It is available with four languages English, Spanish, Portuguese and French, making it even more user-friendly and accessible to a wider audience. The new LAN connectivity feature lets the operator use the PC based APP (ELE Logger) to download test results away from the test area. User flexibility has also increased with the new ADR Touch Control Pro as it can now be operated remotely, so tests can be initiated away from the test area. Many issues can be resolved quickly by our service team through the new remote diagnostics feature and updating to the latest version of software has never been easier.

Compatibility

The all new dual sensor capabilities allow users to test both concrete and cement samples on one frame. The ADR Touch Control PRO is compatible with all existing compression frames and upgrade kits are also available. The upgrade kits can be used to convert existing ADR-Auto consoles to the new Automatic Digital Control Readout.

Testing times

The new generation ADR Compression Machines have an increased control over the pace rate, which allows users to run the pace rate higher than average, but still within standard. This produces an average time saving of 10% for a typical 150mm cube sample.

ELECTRICAL

Reduced component count and no wire design results in increased reliability and serviceability. New low voltage interlocks and e-stop has increased safety. The ADR Touch Control PRO has the latest Arm Core Processor technology which has improved the processing power and speed.

Specification

Capacity	3000 kN
Cubes (Concrete)	Up to 200 mm
Cylinders (Concrete)	Up to 160 x 320 mm
Blocks	Via Optional Platen Handling System
TFV and ACV	Yes
Voltage Supply	220-240 V 50 Hz 1 Ph
Frame Type	Welded
Max vert. Clearance	340 (360 mm without 20mm Ram Spacer)
Max hor. Clearance	310 mm
Platen Sizes	Lower 220mm sq, Upper 300mm dia
Max Ram Travel	50 mm