



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

Contents

www.ele.com
+44 (0) 01525 249 200



This wishlist was generated on 07/04/2017, and contains the following Products:

78-1250/01

225 Litre Drying Oven

78-1245

Dial Thermometer

78-5447/01

Electronic Balance - 3600g x 0.01g

78-5527/01

Electronic Balance - 32 000 g x 1.0 g

81-0220

Aluminium Scoop Large

81-2979

Moisture Content Tin

81-3000

Sample Container - Tinned Steel 0.5 litres

81-4020

Sample Tray - 306 x 306 x 38 mm

24-0811

Rod Comparator

24-0430

Glass Plate.

81-0140

Spatula 200 mm

24-0410

Liquid Limit Device BS with Counter. C/W Metal Grooving Tool & Test Gauge.

24-0425

Grooving Tool and Gauge B.S.

24-0540

Cone Penetrometer. Complete with Stainless Steel Test Cone.

Contents

www.ele.com
+44 (0) 01525 249 200



24-0548

Penetration Test Cup.

24-0544

Penetration Test Cone

24-9000

BS Standard Compaction Mould 1000Cm Capacity.

24-9002

Standard Compaction Rammer 2.5Kg BS1377-1975



225 Litre Drying Oven

Code: [78-1250/01](#)

Product Group: [Percentage Refusal Density \(PRD\)](#),
[Oven Drying Method](#), [Oven Drying Method](#), [Oven Drying Method](#)

Standards

EN 12697-32, EN 13280-4, BS 598-104, BS 1377

Specification

Capacity	225 litres
External Dimensions (l x w x h)	540 x 1040 x 940
Internal Dimensions (l x w x h)	440 x 920 x 600
Fluctuation	± 0.75°C
Rated power heater elements	2000 W
Shelves supplied	3
Shelf positions	4
Weight	80 kg

Alternatives



100 Litre Drying Oven

Code: [78-1225/01](#)



150 Litre Drying Oven

Code: [78-1235/01](#)



425 Litre Drying Oven

Code: [78-0135/01](#)

Product Sheet

www.ele.com
+44 (0) 01525 249 200



50 Litre Drying Oven

Code: [78-1215/01](#)



Dial Thermometer

Code: [78-1245](#)

Product Group: [N/A](#)

Standards

BS 1377

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Electronic Balance - 3600g x 0.01g

Code: [78-5447/01](#)

Product Group: [Electronic Balances](#)

Further Information

****Not available for sale in the USA****

Specification

Capacity resolution	3600 g x 0.01 g
Pan size	160 x 160 mm
Mains and battery	No
Dimensions (l x w x h)	260 x 170 x 90 mm
Weight	6 kg
Weighing units	g, kg, ct, GN, N, lb, oz, lb:oz, ozt, dwt, T, custom unit
Readability	0.1 g



Electronic Balance - 32 000 g x 1.0 g

Code: [78-5527/01](#)

Product Group: [Electronic Balances](#)

Further Information

****Not available for sale in the USA****

Specification

Capacity resolution	32000 g x 1.0 g
Pan size	225 x 275 mm
Mains and battery	Yes
Dimensions (w x d x h)	315 x 355 x 110 mm
Weight	6 kg
Weighing units	g, kg, lb, lb:oz, oz
Repeatability	1 g
Power supply	230AC, 50/60Hz, 10 watts



Aluminium Scoop Large

Code: [81-0220](#)

Product Group: [Slump Test, Scoops and Shovels](#)

Further Information

****Not available for sale in the USA****



Moisture Content Tin

Code: [81-2979](#)

Product Group: [Moisture Content Tin and Sample Containers](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****




Sample Container - Tinned Steel 0.5 litres

Code: [81-3000](#)

Product Group: [Moisture Content Tin and Sample Containers](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

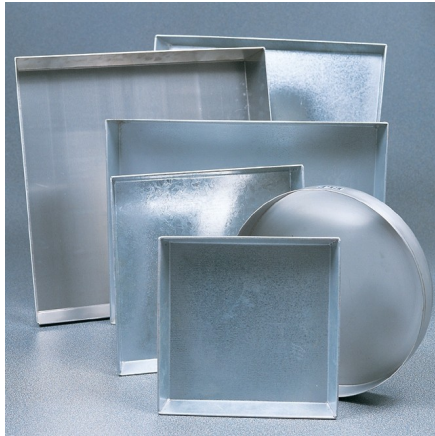

Sample Tray - 306 x 306 x 38 mm

Code: [81-4020](#)

Product Group: [Sample Trays](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Rod Comparator

Code: [24-0811](#)

Product Group: [Rod Comparator, Determination of Plastic Limit](#)

3mm diameter rod comparator to BS1377.

Standards

BS 1924-2, EN 1997-2, ASTM D4318, BS 1377, AASHTO T90



Glass Plate.

Code: [24-0430](#)

Product Group: [Casagrande Method, Determination of Plastic Limit](#)

500 mm square x 10 mm thick.

Standards

BS 1377-2



Spatula 200 mm

Code: [81-0140](#)

Product Group: [Determination of Plastic Limit, Spatulas](#)

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****

Accessories



Vibrating Hammer

Code: [47-0455/01](#)

Alternatives



Vibrating Hammer

Code: [47-0455/01](#)



Liquid Limit Device BS with Counter. C/W Metal Grooving Tool & Test Gauge.

Code: [24-0410](#)

Product Group: [Casagrande Method](#)

With revolution counter. Complete with metal grooving tool and test gauge.

Standards

BS 1377-2

Accessories



Glass Plate.

Code: [24-0430](#)



Grooving Tool and Gauge B.S.

Code: [24-0425](#)

Alternatives



Motorised Liquid Limit Device W/ Counter BS 220-240V 50Hz 1Ph.

Code: [24-0417/01](#)



Grooving Tool and Gauge B.S.


Code: [24-0425](#)

Product Group: [Casagrande Method](#)

Constructed to British Standards.

Standards

BS 1377-2

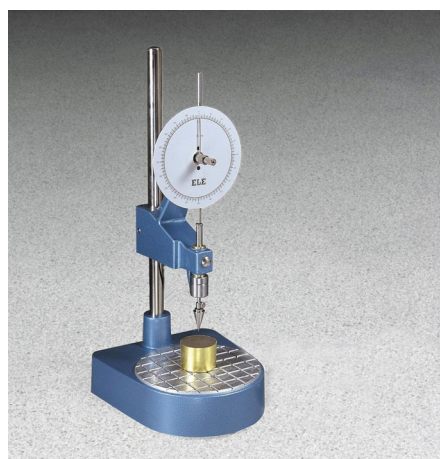

Cone Penetrometer. Complete with Stainless Steel Test Cone.

Code: [24-0540](#)

Product Group: [Cone Penetrometer Method, Cone Penetrometer](#)

Bench mounted apparatus to determine the liquid limit of soils BS1377. This method is applicable to a wide range of soils. The apparatus is fitted with a 150mm diameter dial indicator for direct reading of penetration. Supplied complete with 30deg, 30mm long test cone. Manufactured from stainless steel and includes adjustable levelling feet.

Standards

BS 1377-2

Specification

Dial Indicator	150 mm diameter graduated in 400 x 0.1 mm divisions, indicator point incorporates friction/gear system
Height Adjustment	Rapid, using integral clamping mechanism
Cone release	Manual
Cone	1 x 30°, 35 mm test cone included
Base	Cast aluminium, adjustable levelling feet
Weight kg	7

Accessories



Penetration Test Cup.

Code: [24-0548](#)



Test Gauge for Checking Condition of Cone Point.

Code: [24-0546](#)

Spares/Consumables



Penetration Test Cone

Code: [24-0544](#)

Alternatives



Semi-Automatic Cone Penetrometer

Code: [24-0545/01](#)



Penetration Test Cup.

Code: [24-0548](#)

Product Group: [Cone Penetrometer](#), [Cone Penetrometer Method](#)

Brass construction, 55mm dia x 4mm depth to fit BS1377

Standards

BS 1377-2



Penetration Test Cone


Code: [24-0544](#)

Product Group: [Cone Penetrometer Method](#), [Cone Penetrometer](#)

Stainless steel, 35 mm long with smooth surface at an angle of 30°.

Standards

BS 1377-2

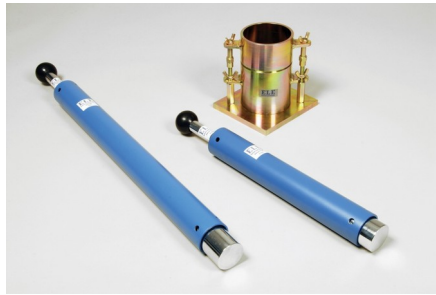

BS Standard Compaction Mould 1000Cm Capacity.

Code: 24-9000

Product Group: BS/EN compaction test 2.5kg,
Accessories for BS compaction and CBR


Plated steel standard compaction mould to BS 1377, comprising of a collar mould body and base plate with quick release wing nuts for easy dismantling.

Standards

BS 1377-4, BS 1924-2

Specification

Mould volume	1 litre
Dimensions	105 mm dia x 115.4 mm high
Construction	All steel, threaded studs with wing nuts, plated.
Weight	5.5 kg

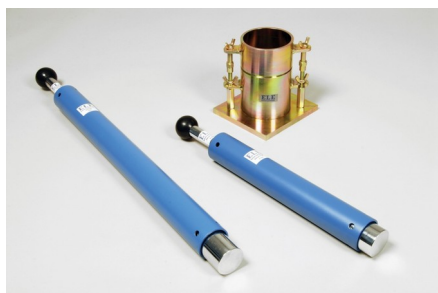

Standard Compaction Rammer 2.5Kg BS1377-1975

Code: [24-9002](#)

Product Group: [BS/EN compaction test 2.5kg](#)

50mm diameter with 300mm drop, manufactured from corrosion protected steel.

Standards

BS 1377-4, BS 1924-2

Specification

Rammer	50 mm dia, 2.5 kg
Drop	300 mm
Guide Sleeve	Machined steel tubing with air pressure release holes
Finish	Corrosion resistant
Weight kg	4.2

Alternatives



BS Compaction Rammer 4.5Kg Wt.

Code: [24-9004](#)