



IF IT'S WORTH BUILDING, IT'S WORTH TESTING

Contents

www.ele.com
+44 (0) 01525 249 200



This wishlist was generated on 06/05/2019, and contains the following Products:

23-7452

Speedy Moisture Tester D2 Large 0-20% Moisture Range. Supplied Less Calcium Carbide

23-7700

Calcium Carbide Powder 500G.

78-0140/03

Drying Oven 750 Litre



Speedy Moisture Tester D2 Large 0-20% Moisture Range. Supplied Less Calcium Carbide

Code: [23-7452](#)

Product Group: [Rapid Moisture Testers](#), [Rapid method by Speedy Moisture Tester](#), [Rapid method by Speedy Moisture Tester](#)

Uses a technique based on the fact that water will react with calcium carbide to form a gas and that the quantity of gas formed is directly proportional to the water present. The gas pressure is indicated on a built-in pressure gauge. The pressure gauge calibrated in percentage of moisture. Has a moisture range of 0-20% with gauge divisions every 0.2%. Holds a sample size of 20 g. Includes an electronic balance of 200 g capacity x 0.1 g readability and is supplied in plastic carrying case.

Standards

BS 812, ASTM D4944, AASHTO T217

Specification

Model	D2 Large
Moisture Range	0 to 20%
Gauge divisions	0.20%
Sample weight g	20
Weight complete kg	8.4

Accessories



Calcium Carbide Powder 500G.

Code: [23-7700](#)



Reagent for Speedy Moisture Testers. Pack of 12 Cans 500 G Each. (Calcium Carbide)

Code: [23-7702](#)



Speedy Calibration Unit Self Contained Unit.

Code: [23-7600](#)

Spares/Consumables



Portable Electronic Balance

Code: [23-7452/12](#)

Alternatives




Speedy Moisture Tester D2 Small 0-20% Moisture Range. Supplied Less Calcium Carbide

Code: [23-7502](#)



Speedy Moisture Tester G2 Large 0-50% Moisture Range. Supplied Less Calcium Carbide

Code: [23-7462](#)

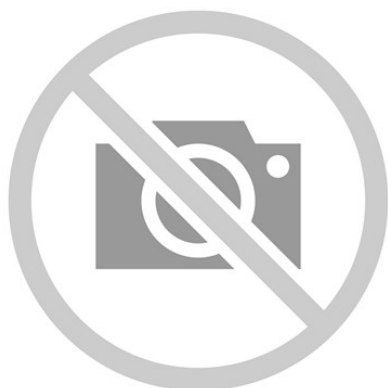

Calcium Carbide Powder 500G.

Code: [23-7700](#)

Product Group: [Accessories for the Speedy Moisture Tester](#), [Accessories for the Speedy Moisture Tester](#)

Supplied in 500 g container.

Standards

ASTM D4944, AASHTO T217

Further Information

****NOT AVAILABLE FOR SALE IN THE USA****



Drying Oven 750 Litre

Code: [78-0140/03](#)

Product Group: [Oven Drying Method](#), [Oven Drying Method](#), [Oven Drying Method](#)

Constructed of mild steel with powder coated exterior and aluminium coated steel chamber (corrosion resistant). 3 pH + neutral with digital control. Microprocessor digital control as standard. Temperature range 40-250 deg.C.

Comes with certificate of conformity for BS1377.

5 shelves and 8 shelf positions.

Weight: 200kg